



# PERSONAL **PROTECTIVE** EQUIPMENT

HEAD TO TOE PROTECTION



**2024 - 2025**













# CONTENTS

Pg #	Category	Brand
------	----------	-------








## A1-A5 Head Protection

A1	Guard	
A1	Chin Strap	
A1	Suspension	
A2	Maxxtra I - 6pt	
A2	Maxxtra II - 6pt	
A2	Y-shield Direct S	
A3	Orbit RV	
A3	UH9 Mercury Shield Full Brim	
A3	MSA Full Brim	
A4	3M™ SecureFit™ H-700SFR	
A4	3M™ SecureFit™ H-700SFV	
A5	Bullard LTX Series	
A5	Bump Cap	
A5	Clip Cap	

## B1-B11 Eye Protection

B1	Ryder - Basic Plus Range	
B1	Fargo - Basic Plus Range	
B1	Hawk - Basic Plus Range	
B2	Edge - Basic Plus	
B2	Active - Premium Range	
B2	Maxima - Premium Plus Range	
B3	Super-Fit - Premium Range	
B3	Vista - Premium Range	
B3	Sporty - Premium Range	
B4	Metallic - Premium Range	
B4	Elite - Premium Range	
B4	Flash - Premium Plus Range	
B5	Vision Clear	
B5	Vision Grey	
B5	Vision Grey Visor Combo	







Pg #	Category	Brand
------	----------	-------

B6	UltraSonic Goggle	
B6	Tactical Spoggle	
B6	RX Ultra Goggle Clear	
B7	Vision CL / Vision SM	
B7	Vision CL AF / Vision SM AF	
B7	Ray CL / Ray SM	
B7	Eyestar CL AF / Eyestar SM AF	
B8	Storm CL AF / Storm SM AF	
B8	Uni CL / Uni SM	
B8	Visitor CL / Visitor SM	
B8	Weld Goggle	
B9	Weld Shield BK	
B9	Bracket BK	
B9	Brow Guard YW	
B9	Glass CL, 10, 12	
B10	Balaclava / Face Hood	
B10	Coolmax Balaclava	
B10	Cotton Hood	
B10	DuPont Kevlar Neck Protector	
B11	Golden Welding Hood	
B11	Visor CL	
B11	Virtua AP Series	

## C1-C5 Hearing Protection

C1	Solo Light	
C1	Solo Xtreme	
C1	Ultra Solo	
C1	Cap Solo	
C2	Ear Muff Lite	
C2	Ear Muff Cap	
C2	3M H10A	
C2	3M H9A	




Pg #	Category	Brand
------	----------	-------

C3	3M H9P3E	
C3	Sync	
C3	Sync Cord	
C3	Ear Cord	
C4	3M 1100	
C4	3M 1110	
C4	Ultra Ear	
C4	Ear Ultra	
C5	Refill	
C5	Dispenser	

## D1-D9 Respiratory Protection













D1	Makrite™ Sekura-N95	
D1	Makrite™ Sekura-N95V	
D1	Makrite™ 302P2w	
D1	Makrite™ 302P2Vw	
D2	Makrite™ 9600-N95	
D2	Makrite™ 9500-N95	
D2	Makrite™ 9500V-N95	
D2	Makrite™ 9500-N95VOV	
D3	Makrite™ MK910-N95	
D3	Makrite™ MK910V-N95	
D3	Makrite™ MKP3SLAVa	
D3	Makrite™ ENVI-P3VF	
D4	Makrite™ FIT-P3DSLAV	
D4	Surgical Mask 75	
D4	3M 8210 N95	
D4	3M 9010 N95	
D5	3M 9010V N95	
D5	3M 8511 N95	
D5	3M 8514 N95	
D5	3M 8247 R95	







# CONTENTS

Pg #	Category	Brand
D6	3M 8233 N100	
D6	3M 8822 FFP2	
D6	3M 9322+ FFP2	
D6	3M 8835 FFP3	
D7	3M 6200 M / 6300 L	
D7	3M 7502 M / 7503 L	
D7	3M 6800 M / 6900 L	
D8	3M 6001	
D8	3M 6003	
D8	3M 6006	
D8	3M 2091 P100	
D9	3M 2097 P100	
D9	3M 5N11	
D9	3M 501	
D9	Spiroscape EEBD (PSI)	
D10	Dust Mask Pro	
D10	Respire FFP2	
D10	Respire V FFP2	




## E1-E24 Body Protection

E1	Chief C	
E1	Chief PS	
E2	Chief C Tapes	
E2	Chief PS Tapes	
E3	Comfort C	
E3	Comfort PS	
E4	Best PS	
E4	Best CV	
E5	Polycotton Coverall	
E5	Polycotton Pant & Shirt	
E6	European - PS	
E6	European - PS	
E7	European LITE PS	
E7	LENZING™ FR/ DS-CABCD	

E8	Safeguard PRO	
E8	Safeguard C	
E9	Spartan I	
E9	Spartan II	
E10	Spartan IV	
E10	Dual Tone Workshirt	
E10	Technician Vest	
E11	Labcoat	
E11	Disposable Coverall	
E12	Proguard Type 5/6	
E12	Proguard Type 4/5/6	
E13	Antistatic Coverall	
E13	Labcoat 65/35	
E14	Polo I	
E14	Polo II	
E14	Polo III	
E14	Glow	
E15	MultiGlow	
E15	3M MultiGlow	
E15	3M Radiant	
E15	Dazzle	
E16	Twinkle	
E16	Sparkle	
E16	Bright	
E16	Bright ID	
E17	Glitter	
E17	Glitter ID	
E17	Flare	
E17	Glitz	
E18	Star	
E18	Shine	
E18	Lumina Black	
E18	Reflective Belt	





E19	Arctic	
E19	Bulldozer Fireman Suit	
E19	HDPE Apron	
E20	Torch Jacket	
E20	Torch Apron	
E20	Torch Sleeves	
E20	Torch Cover	
E21	Golden Jacket	
E21	Golden Apron	
E21	Golden Sleeve	
E21	Golden Shoe Cover	
E22	Polar Jacket	
E22	Polar Trouser	
E23	Rain Coat	
E23	Rain Suit	
E24	CHEM+FR Pant & Shirt	
E24	CHEM+FR Coverall	

## F1-F7 Fall Protection

F1	100141 Vertex Comfy II	
F1	JE145002N Vertex Comfy I	
F1	Vertex/ 100119	
F1	Vertex Plus/ 100059	
F2	Vertex Lite II/ 100058	
F2	Vertex Lite I/ 100068	
F2	Vertex Web Y / 300205	
F2	Vertex Web U / 300225	
F2	Vertex Rope Y / 300210	
F3	Vertex Rope U / 321007	
F3	ANSI WEB Y / JE312206N	
F3	ANSI WEB U / JE311237N	



# CONTENTS

Pg #	Category	Brand
F4	ELASTIC WEB Y / 300207	
F4	ELASTIC WEB U / 300233	
F4	Kernmantle Rope/ 300321	
F4	Comfort Belt	
F5	JE210SET-C Work Positioning Lanyard	
F5	Vertical Anchor Line 10m	
F5	Vertical Anchor Line 15m	
F5	Horizontal Anchor Line	
F6	Self Retractable/ SRL 3	
F6	Self Retractable/ SRL 6S	
F6	Self Retractable/ SRL 10S	
F6	Self Retractable/ SRL 15S	
F7	Hook/ JE515025	
F7	Hook/ JE515025A	
F7	Hook/ JE525030	
F7	Hook/ JE525030A	
F7	JE80016 Trauma Strip	



## G1-G22 Hand Protection

G1	Gorilla Active I & II	
G1	Gorilla Flex I	
G1	Gorilla Flex Cool I	
G2	Gorilla Flex Cool II	
G2	Xtralite Prime	
G2	Gorilla Defender I	
G3	Gorilla Flex Oil I	
G3	Gorilla Black I & II	
G3	Gorilla Grey I & II	
G4	Gorilla White I & II	
G4	Gorilla Bull I	
G4	Gorilla Bull II Yellow/Green	
G4	Gorilla Bull II Grey/Blue	










G5	Gorilla Force I & II	
G5	Gorilla Cut 5 PU	
G5	Valpro Cut 5 PU	
G6	Gorilla CUT 5 Nitrile	
G6	Gorilla Cut 5 Microfoam SL	
G6	Gorilla CUT 5 Microfoam	
G7	Gorilla Flex Cut 4/D	
G7	Gorilla Cut C3	
G7	Gorilla Cut C5	
G8	Skydda Metal Mesh	
G8	Viking TG	
G8	Tough Guard	
G9	Empiral® Original SDX 2	
G9	Empiral® Original SDX 5	
G9	ValueLine I	
G10	Valpro Shield II/ B-500-G	
G10	Gorilla Shield I	
G10	Gorilla Shield Lite II	
G11	Gorilla Chem I	
G11	Gorilla Chem II	
G11	Gorilla Flex Chem I	
G12	Gorilla Extreme I	
G12	Gorilla Extreme II	
G12	LP RB Rabbit	
G13	LinePro	
G13	RF1 Multi Purpose	
G13	HD 27 NEO Latex Neoprene	
G14	Gorilla Vinyl I	
G14	Gorilla Vinyl II	
G14	Gorilla Nitro I & II	
G15	Blue KNDDA & KNDDA II	
G15	Blue KNSDA & KNSDA II	
G15	Drill Dotted Gloves	

G16	Cotton BW400	
G16	Cotton BW600	
G16	Cotton BW840	
G17	HDPE Gloves	
G17	DuPont Kevlar Sleeves	
G17	PP Sleeves	
G18	1006-NT/ASK-1001	
G18	1006-YW/ASK-1001	
G18	1005-FL/1026	
G19	1007-RD/1026	
G19	1008-GR/1034 / 1008E-GR/1034	
G19	1002-OR/1034	
G20	1009-YW/1034	
G20	1010-YW/1034	
G20	1001H-YW/ASK-2014	
G21	1001K-GD/ASK-2014	
G21	1001-RD/ASK-2014 RD	
G21	1001W-RD/ASK-2014 RD	
G22	TIG Welding Gloves	
G22	Driver Gloves	
G22	3602 - Freezer	
G22	3601- Freezer	



## H1-H8 Foot Protection


H1	Best Workman/ L-7141	
H1	Best Run / L-7222	
H1	Best Manager/ L-7006B	
H1	Best Sport/ L-7296 EH	
H2	Best Jogger/ L-7328	
H2	Best Sneaker/ L-7501	
H2	Best Air / L-7331	
H2	Best Max / L-7389	

# CONTENTS






Pg #	Category	Brand
H3	Best Worker/ M-8138	
H3	Best Boy/ M-8027	
H3	Best Slip-on/ M-8025	
H3	Best Climber/ M-8439	
H4	M-8356RB EH	
H4	Best Hiker/ M-8179	
H4	Best Lisa/ L-7508w	
H4	Best Welder/ H-9430	
H5	Best Wellington/ W-6038	  
H5	Gumboot S3	
H5	Gumboot S5	
H5	Bulldozer	
H6	TP-222L SBP/ MODEL 3	
H6	TP-103 S1P/ MODEL S	
H6	TP-1202 S1P/ MODEL X	
H6	TP-222H SBP MODEL 3	
H7	TP-109 S1P/ Model S	
H7	TP-109 S3 Model S	
H7	TP-213 S1P/ Model Y	
H7	TP-213 S1P/ Model Y	
H8	Memory Foam	 
H8	Bamboo Cotton Socks	
H8	PP Shoe Cover	
H8	PE Shoe Cover	


## I1-I3 Fire Protection

I1	Flash Small	
I1	Flash Medium	
I1	Flash Large	
I2	Flash Small PVC Box	
I2	Flash Medium PVC Box	
I2	Flash Large PVC Box	


Pg #	Category	Brand
I3	Flash 0.4 mm	
I3	Flash 0.8 mm	
I3	Flash 1.6 mm	

## J1-J5 Emergency First Aid

J1	Matsuda P150	
J1	Matsuda P100	
J2	Matsuda SS-B100	
J2	Matsuda SS-E100	
J2	Matsuda SS-S100	
J3	Matsuda B100	
J3	Matsuda E100	
J3	Matsuda S100	
J4	EW-900	
J4	EW-904	
J4	EW-906	
J4	EW-2990	
J4	EW-919/F17899	
J4	EW-955	
J4	Eye Wash Box	
J4	Eye Wash Station	

J5	FAW5 (Micro Kit)	
J5	FAW10 (Auto Kit)	
J5	FAWB25 (Team Kit)	
J5	FAG25 (Office Kit)	
J5	FAO50 (Sports Plus Kit)	
J5	FAW50 (Industry Kit)	
J5	FA100 (Workplace Kit)	
J5	Burn Kit	

## K1 Gas Detector








K1	BW C2-H H2S	
K1	BW C3-H H2S	
K1	BW MICRO CLIP XL	
K1	BW MAX XT II	

Pg #	Category	Brand
------	----------	-------

## L1 Spill Kit

L1	Oil Spill Kit	
L1	Chemical Spill Kit	

## M1-M2 Safety Equipment

M1	3M SS Cleaner & Polish	
M1	Scaffolding Tags	
M2	Kit ARC 4 Power	
M3	Arc flash jacket, 41.0cal/cm <sup>2</sup>	
M3	Arc flash Bib Coverall, 41.0cal/cm <sup>2</sup>	
M4	Balaclava ATPV: 34.0 cal/cm <sup>2</sup>	
M4	Arc protection hood ARC 4 Power	
M5	ErgoS-Intec +	
M5	ErgoS-Intec Power	
M6	ErgoS-Plus	
M6	ErgoS 2Power	
M6	ErgoS-3Plus	
M6	ARC2light	
M6	ARC2 18.0 cal/cm <sup>2</sup>	
M6	ARC3 31.0 cal/cm <sup>2</sup>	
M6	ARC4 45.0 cal/cm <sup>2</sup>	






## The Brain Game! Use Proper Head Protection

We are in our mission to make safety affordable to everyone. Our Head Protection ranges are designed to provide maximum protection from impact and penetration hazards caused by falling objects. Consult with our PPE Experts to select the right Head Protection for based on your workplace & hazard level.

There are two categories of impact protection for hard hats: Type I and Type II. Type I hard hats are intended to reduce the force of impact resulting from a blow only to the top of the head. Type II hard hats are intended to reduce the force of lateral impact resulting from a blow that is received off-center, from the side, or to the top of the head.

In addition, there are three classifications of hard hats: G, E and C. Class G (general) hard hats offer protection against electrical hazards of up to 2,200 volts (V). Class E (electrical) hard hats provide the greatest protection for electricians, linemen and wiremen, insulating against high-voltage shock, burns and electricity up to 20,000V. Class C (conductive) hard hats are not designed to be used in electrical work. Another form of head protection is a bump hat, which provides protection in low clearance areas. Unfortunately, this type of PPE does not offer protection from falling objects or electrical hazards.

### EN 397 Industrial protection helmets

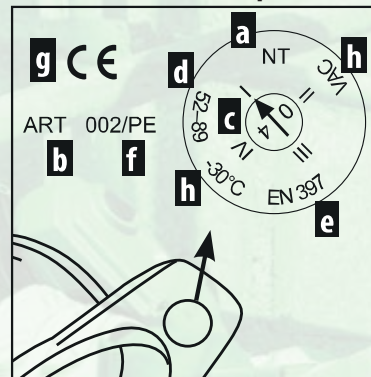

### Marketing elements

- a Identification name or brand of the producer
- b Type of helmet (designation of the producer)
- c Year and quarter of production
- d Size or range of sizes (in centimeters)
- e Number of the legislation (EN 397)
- f Abbreviation of the material of the shell (for example, ABS, PC, HDPE etc.)
- g CE marking
- h Additional requirements



# HEAD PROTECTION



# Guard

Ventilated Helmet with Ratchet Suspension	
Standard	EN 397:2012
Material	HDPE (High Density Polyethylene) Shell
Suspension	<ul style="list-style-type: none"> <li>• 4 Points Ratchet Suspension Quick Action</li> <li>• Ratchet Wheel Universal Slot for Earmuff</li> </ul>
Features	<ul style="list-style-type: none"> <li>• Tested, Passed &amp; Certified</li> <li>• 6 Points Ventilation to Support Air Flow</li> </ul>
Weight / Carton	11.86 kgs
Carton Dimension	57.50 x 46.50 x 41 cms
CBM / Carton	0.1096
Packing / Carton	30 Pieces
Origin	China
Optional Accessories	<ul style="list-style-type: none"> <li>• Chin Strap</li> <li>• Nylon Suspension</li> </ul>



White



Yellow



Blue



Red



Orange



Green



Grey



## Chin Strap

Chin Strap	
Features	<ul style="list-style-type: none"> <li>• Compatible with Ameriza Helmet</li> <li>• Cup Shaped</li> <li>• Adjustable Chin Strap</li> </ul>
Weight / Carton	19.55 kgs
Carton Dimension	57.50 x 46.50 x 41 cms
Packing / Carton	2000 Pieces



## Suspension

Textile Ratchet Suspension	
Features	<ul style="list-style-type: none"> <li>• Compatible with Ameriza Helmet</li> <li>• 4 Points Textile Suspension with Adjustable Form &amp; Sweatband</li> </ul>
Weight / Carton	15.125 kgs
Carton Dimension	50 x 59 x 43 cms
Packing / Carton	180 Pieces



### Maxxtra I – 6pt

#### Industrial Hard Hat, Non-Vented Pinlock

Standard	EN 397:2012, ANSI Z89.1-2014 Type I, Class C
Shell Material	High Density Polyethylene (HDPE)
Features	<ul style="list-style-type: none"> <li>• Excellent Shock Absorption</li> <li>• Light in Weight &amp; Strong</li> <li>• Universal Slots on Both Sides for Accessory Mounting Like Ear Defenders, or Mask</li> <li>• Ergonomic &amp; Innovative Design</li> <li>• 6 Wide Point Support for Maximum Comfort &amp; Easy Impact Absorption</li> <li>• Strong 25mm Plastics Webbing</li> <li>• High Quality Material for Highly Absorbent Sweatband With Embedded Foam</li> <li>• Widely Adjustable Size, Ranging From 52-62 Cm Angled Headband Terminals for a Perfect Fit</li> <li>• Withstands Temperatures Down to -20 °C</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Road Construction, Oil &amp; Gas, Mining</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	16.85
Carton Dimension	53 x 48 x 64 cms
CBM / Carton	0.1628
Packing / Carton	40 Pieces
Origin	United Arab Emirates



### Maxxtra II – 6pt

#### Industrial Hard Hat, Non-Vented Pushbutton

Standard	EN 397:2012, ANSI Z89.1-2014 Type I, Class C
Shell Material	High Density Polyethylene (HDPE)
Features	<ul style="list-style-type: none"> <li>• Excellent Shock Absorption</li> <li>• Light in Weight &amp; Strong</li> <li>• Universal Slots on Both Sides for Accessory Mounting Like Ear Defenders, or Mask</li> <li>• Ergonomic &amp; Innovative Design</li> <li>• 6 Wide Point Support for Maximum Comfort &amp; Easy Impact Absorption</li> <li>• Strong 25mm Plastics Webbing</li> <li>• High Quality Material for Highly Absorbent Sweatband With Embedded Foam</li> <li>• Widely Adjustable Size, Ranging From 52-62 Cm Angled Headband Terminals for a Perfect Fit</li> <li>• Withstands Temperatures Down to -20 °C</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Road Construction, Oil &amp; Gas, Mining</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	16.85
Carton Dimension	53 x 48 x 64 cms
CBM / Carton	0.1628
Packing / Carton	40 Pieces
Origin	United Arab Emirates



### Y-Shield™ Direct S

#### Y-Shield™ Direct S Vented Helmets

Standard	EN 397:2012, ANSI Z89.1-2014 Type I, Class C
Shell Material	HDPE
Suspension	8 Points Pinlock Suspension
Features	<ul style="list-style-type: none"> <li>• Strong 25mm Nylon Webbing</li> <li>• High Quality Sweatband with Embedded Foam</li> <li>• Universal Slot for Accessories Mounting</li> <li>• Patented Y-Shield™ Technology for Shock Absorption</li> <li>• Patented Real3D™ Continuous Head Size Adjustment</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Road Construction</li> <li>• Oil &amp; Gas, Mining</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	19.90 kgs
Carton Dimension	65 x 54 x 45 cms
CBM / Carton	0.1580
Packing / Carton	45 Pieces
Origin	United Arab Emirates



## Orbit RV

### Y-Shield™ Orbit R Vented Helmets

Standard	EN 397:2012, ANSI Z89.1-2014 Type I, Class C
Shell Material	HDPE
Suspension	8 point Ratchet Suspension
Features	<ul style="list-style-type: none"> <li>• Strong 25mm Nylon Webbing</li> <li>• High Quality Sweatband with Embedded Foam</li> <li>• Universal Slot for Accessories Mounting</li> <li>• Patented Y-Shield™ Technology for Shock Absorption</li> <li>• Patented Real3D™ Continuous Head Size Adjustment</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Road Construction</li> <li>• Oil &amp; Gas, Mining</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	20.0 kgs
Carton Dimension	65 x 54 x 45 cms
CBM / Carton	0.1580
Packing / Carton	45 Pieces
Origin	United Arab Emirates



## UH9 Mercury Shield Full Brim

### UH9 Mercury Shield® Full Brim Helmets

Standard	EN 397:2012, ANSI Z89.1-2014 Type I, Class C
Shell Material	HDPE
Suspension	8 point Ratchet Suspension
Features	<ul style="list-style-type: none"> <li>• Strong 25mm Nylon Webbing</li> <li>• High Quality Sweatband with Embedded Foam</li> <li>• Universal Slot for Accessories Mounting</li> <li>• Mercury-Shield™ Technology for Extra Protection</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Road Construction</li> <li>• Oil &amp; Gas, Mining</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	12.9 kgs
Carton Dimension	65 x 54 x 45 cms
CBM / Carton	0.1580
Packing / Carton	25 Pieces
Origin	United Arab Emirates



## MSA Full Brim

### V-Gard Full Brim Helmet W/Ratchet Suspension

Standard	ANSI/ISEA Z89.1-2014, CSA Z94.1-2014
Classification	Type 1, Class E
Shell Material	Virgin (HDPE) with UV Inhibitor
Features	<ul style="list-style-type: none"> <li>• Polyethylene Shell Provides Superior Impact Protection</li> <li>• Self-Adjusting Crown Straps Ensure a Comfortable Fit</li> <li>• Fas-Trac III Suspension is the Most Comfortable</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• General Purpose</li> <li>• Confined Space</li> <li>• Working at Heights</li> <li>• Welding</li> </ul>
Weight / Carton	6.90 kgs
Carton Dimension	57 x 47 x 42 cms
CBM / Carton	0.1125
Packing / Carton	15 Pieces
Origin	Shell: Mexico Ratchet: USA





## 3M™ SecureFit™ H-700 H-700SFR

3M™ SecureFit™ H-Series Non- Vented	
Standard	ANSI Z89.1 Type I Class G, E CSA Z94.1 Type I
Suspension	4 Points Ratchet
Shell Material	HDPE
Features	<ul style="list-style-type: none"> <li>• Electrical Class E (20,000V)</li> <li>• SecureFit™ Pressure Diffusion Technology</li> <li>• Flexes &amp; Self-Adjusts to the Size of the Wearer's Head</li> <li>• Reduces Pressure &amp; Increases Comfort for All-Day Wear</li> <li>• Fits a Wider Range of Head Sizes from 6-1/4 to 8 (50-64 cm)</li> <li>• UVicator</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction work</li> <li>• Heavy and light industrial</li> <li>• Petrochemical</li> <li>• Mining</li> <li>• Road Construction</li> </ul>
Weight / Carton	8.70 kgs
Carton Dimension	56 x 46 x 42 cms
CBM / Carton	0.1082
Packing / Carton	20 Pieces
Origin	USA



## 3M™ SecureFit™ H-700 H-700SFV

3M™ SecureFit™ H-Series Vented	
Standard	ANSI Z89.1 Type I Class C CSA Z94.1 Type I
Suspension	4 Points Ratchet
Shell Material	HDPE
Features	<ul style="list-style-type: none"> <li>• C (Conductive)</li> <li>• SecureFit™ Pressure Diffusion Technology</li> <li>• Flexes &amp; Self-Adjusts to the Size of the Wearer's Head</li> <li>• Reduces Pressure &amp; Increases Comfort for All-Day Wear</li> <li>• Fits a Wider Range of Head Sizes from 6-1/4 to 8 (50-64 cm)</li> <li>• UVicator</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction work</li> <li>• Heavy and light industrial</li> <li>• Petrochemical</li> <li>• Mining</li> <li>• Road Construction</li> </ul>
Weight / Carton	8.70 kgs
Carton Dimension	56 x 46 x 42 cms
CBM / Carton	0.1082
Packing / Carton	20 Pieces
Origin	USA





## Bullard LTX Series

Fire Fighting Helmet	
Standard	Certified to NFPA 1971-2013
Suspension	4 Points Nylon Crown Straps & Crown Pad
Shell Material	Thermoplastic
Features	<ul style="list-style-type: none"> <li>• M-Pact Shell with Smart Ridge Design</li> <li>• High-Heat Thermoplastic Outer Shell</li> <li>• Comfortable Sure-Lock® Ratchet Headband</li> <li>• Nomex® Chinstrap with Quick Release</li> <li>• Buckle &amp; Postman's Slide Fastener</li> <li>• Scotchlite® Reflective Markings</li> </ul>
Weight / Carton	6.12 kgs
Carton Dimension	62 x 34 x 32 cms
CBM / Carton	0.06745
Packing / Carton	3 Pieces
Origin	USA



## Bump Cap


Safety Bump Cap	
Standard	CE EN 812:2012
Size	Standard (Adjustable)
Features	<ul style="list-style-type: none"> <li>• Velcro for Fit Adjustment</li> <li>• ABS Shell Material</li> <li>• Thermo Formed Foam Cushioning</li> <li>• 100% Cotton</li> <li>• Long Hood for Greater Usage</li> <li>• Air Holes for Ventilation</li> </ul>
Colors	Navy Blue, Light Grey, Yellow, Red
Weight / Carton	10 kgs
Carton Dimension	76 x 32 x 39 cms
CBM / Carton	0.09484
Packing / Carton	50 Pieces
Origin	China



## Clip Cap

Non-Woven Clip Cap	
Standard	CE, CAT I
Material	PP Non-Woven
Style	Single Elastic
Fabric Weight	10 GSM
Color	White, Blue, Black
Size	21 Inches
Features	<ul style="list-style-type: none"> <li>• Elastic Around the Head for Secure Fit</li> <li>• Low Linting, Soft, Light Weight &amp; Breathable for User Comfort</li> </ul>
Weight / Carton	2.50 kgs
Carton Dimension	45 x 20 x 34 cms
CBM / Carton	0.0306
Packing / Carton	100 Pieces/Bag, 10 Bags/Carton
Origin	China


## Glasses, Goggles & Masks

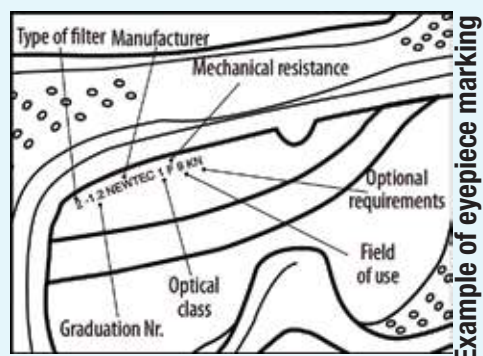

### Types of filter

- 2 Ultraviolet (Perception of colour can be altered)
- 2C Ultraviolet (Perception of colour is not altered)
- 3 Ultraviolet (good discernment of colour)
- 4 Infrared
- 5 Solar
- 6 Solar + Infrared

### Features applicable to the different type of protectors

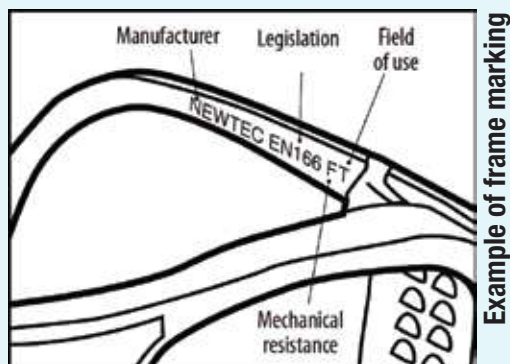

### Optical class

Represents the refractive index, i.e. the ability to distort the image, due to the tolerance of the production.

There are 3 classes, from 1 to 3 with growing deviation.

Class 3 can be used only for short period of time.



- EN 166 Manufacture and performance specifications
- EN 169 Filters for welding and related processes
- EN 170 Ultraviolet filters
- EN 171 Infrared filters
- EN 172 Solar filters for industrial use
- EN175 Equipment that protects the face and eye during welding and related processes
- EN 379 Automatic filters for welding
- EN 1731 Mesh face and eye protectors



Ryder Amber



Ryder Clear

Ryder Indoor/Outdoor Mirror

Ryder Smoke

Ryder Silver Mirror

## Ryder - Basic Plus Range

### Emperor's Ryders Safety Shades

Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>• Scratch-Resistant</li> <li>• Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>• Snug-Fitting Wrap Around Lens Provides</li> <li>• Perfect Impact Protection Around the Eyes</li> <li>• Close-Fitting Unitary Front with Dual 9.75 Base</li> <li>• Curvature Offers Wide &amp; Unobstructed Vision</li> </ul>
Nose Piece	Universal, Integral to Lens
Temple	• Modern Temple Design & Spatula Type with Soft Insert
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	11.50 kgs
Carton Dimension	83 x 22 x 61 cms
CBM / Carton	0.1114
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Fargo Silver Mirror



Fargo Clear Grey

Fargo Clear Orange

Fargo Smoke Grey

Fargo Smoke Orange

Fargo Amber

Fargo Indoor/Outdoor Mirror

Fargo Bronze Mirror

## Fargo - Basic Plus Range

### Far View Safety Shades

Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>• Scratch-Resistant</li> <li>• Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>• One-Piece Lens, Lightweight, 22g only</li> <li>• Dual 9.75 Base Curve</li> <li>• Closely Fits Various Facial Contour</li> <li>• The Lens Provides Users with Clearest &amp; the Most Panoramic View Without Obstruction</li> </ul>
Nose Piece	Universal, Integral to Lens
Temple	• Modern Temple Design & Spatula Type with Soft TPR Insert
Temple Tip	Soft & non-slip rubber tips
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	11.50 kgs
Carton Dimension	82 x 23 x 61 cms
CBM / Carton	0.1150
Packing / Carton	25 Packets (300 pieces)
Origin	Taiwan
Optional	Pouch & Cord

Hawk Shade 5 Welding



Hawk Clear

Hawk CE Green

Hawk Smoke

## Hawk - Basic Plus Range

### Hawk-Eye Safety Shades

Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>• Scratch-Resistant</li> <li>• Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>• Optical Class 1 Lens</li> <li>• Low Energy Impact Resistant</li> <li>• Wraparound with Angle Side Protection</li> </ul>
Frame	Nylon Built in Brow Protection
Nose Piece	Universal Nose Bridge
Temple	<ul style="list-style-type: none"> <li>• Nylon 4-Length Positions Adjust</li> <li>• Modern Temple Design and Spatula Extendable</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	14.40 kgs
Carton Dimension	82 x 22.50 x 60.50 cms
CBM / Carton	0.1116
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord



## Edge - Basic Plus

### Over Spectacle - Fits Most Prescription Glasses

Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	<ul style="list-style-type: none"> <li>• Full Front, Side &amp; Top Protection</li> <li>• High Velocity Impact Resistant</li> <li>• Anti UV Light</li> </ul>
Lens	<ul style="list-style-type: none"> <li>• Polycarbonate Lens Filters Out More Than 99.9% of Harmful UV Light</li> <li>• Optical Class 1 Lens</li> <li>• Low Energy Impact Resistant</li> </ul>
Frame	Nylon Built in Brow Protection
Nose Piece	Integral to Lens
Temple	Ventilated, Wide Spatula With Side Protection
Colour	Clear Smoke
Origin	Taiwan
Weight / Carton	19.24 kgs
Carton Dimension	87 x 36 x 23 cms
CBM / Carton	0.07203
Packing / Carton	25 Packets (300 Pieces)
Optional	Pouch & Cord

Active Amber  
(Anti-Fog)



## Active - Premium Range

### Actively Light Safety Shades

Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Weight	Ultra Lightweight, 19g Only
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>• Scratch-Resistant</li> <li>• Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>• One-Piece Lens</li> <li>• 9.5 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit</li> </ul>
Frame	Rim-Less
Nose Piece	Soft Finger-Type Design
Temple	<ul style="list-style-type: none"> <li>• Co-Molded</li> <li>• Non-Slip</li> <li>• Ventilated Temple for Snug Fitting</li> </ul>
Temple Tip	TPE Co-Molded Inserted into Temple End
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	10.80 kgs
Carton Dimension	83 x 22.50 x 62.50 cms
CBM / Carton	0.1167
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Maxima Amber  
(Anti-Fog)



## Maxima - Premium Plus Range

### Safety To Its Max

Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>• 9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light</li> </ul>
Frame	<ul style="list-style-type: none"> <li>• Air Vented</li> <li>• Lens Clip in Frame</li> <li>• Co-Injected Brow Cushion Comfort &amp; Protects from Injury</li> <li>• Half-Frame &amp; Slim Temple Design</li> </ul>
Nose Piece	Non-Slip & Ventilated Nose Piece
Temple	<ul style="list-style-type: none"> <li>• In/Out &amp; Up/Down 3 Positions Temple Adjustments</li> <li>• Ultra-Soft TPR Tip</li> <li>• Straight Back Temples Provide Secure Fit</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	9.86 kgs
Carton Dimension	65 x 36 x 41 cms
CBM / Carton	0.0959
Packing / Carton	10 Packets (100 Pieces)
Origin	Taiwan
Included	Pouch & Cord

Super-Fit Blue Mirror

Super-Fit Clear  
(Anti-Fog)Super-Fit Smoke  
(Anti-Fog)

Super-Fit Silver Mirror



Super-Fit Indoor/Outdoor Mirror



Super-Fit Bronze Mirror

## Super-Fit - Premium Range

All Time Fit Shades	
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Scratch-Resistant</li> <li>Polycarbonate Lens Provides 99.9% of UV Protection</li> <li>Full Wrap Around With 9.5 Curved Base Lens Provides Full Front &amp; Side Eye Protection</li> </ul>
Frame	Lens Snapped in the Frame
Nose Piece	Soft TPE Universal Fit
Temple	<ul style="list-style-type: none"> <li>Co-Moulded Unique Temple Width Adjustable &amp; Rotatable Design for Customized Fitting</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	13.03 kgs
Carton Dimension	84 x 23 x 64 cms
CBM / Carton	0.1236
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Vista Bronze

Vista Clear  
(Anti-Fog)Vista Smoke  
(Anti-Fog)

Vista Silver Mirror

Vista Indoor /  
Outdoor Mirror

## Vista - Premium Range

Visionary Glasses	
Standard	CE EN166, ANSI, CE, AS and MCEPS
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Thickness 2.2 mm</li> <li>Optical Class 1 Polycarbonate Lens Provide 99.9% of UV protection</li> <li>Full Wrap Around with 8 Base Lens Provides Full Front &amp; Side Eye Protection</li> </ul>
Frame	Full Frame, Black
Nose Piece	Soft TPR Glued on Nose Bridge
Weight	35.50g
Hinges	<ul style="list-style-type: none"> <li>Nickle Silver 5-Barrel Type</li> <li>Inserted to Frame &amp; Temples</li> </ul>
Temple	<ul style="list-style-type: none"> <li>Black, Length (Lens-Tip): 160 mm</li> <li>TPE Soft Tips for Comfort</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	14.75 kgs
Carton Dimension	83 x 31 x 59 cms
CBM / Carton	0.1518
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Sporty Blue Mirror

Sporty Clear  
(Anti-Fog)Sporty Smoke  
(Anti-Fog)

Sporty Silver Mirror



Sporty Indoor/Outdoor Mirror



Sporty Bronze Mirror

## Sporty - Premium Range

Athletic Safety Shades	
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Weight	28g
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>High Impact Resistance</li> <li>Lenses Provide 99.9% of UV Protection</li> <li>Full Wrap Around With 9 Curved Base Lens Provides More Coverage</li> <li>Without the Distraction of Seams or Traditional Type Side Shields</li> </ul>
Frame	<ul style="list-style-type: none"> <li>Brow Guard-TPE Co-Moulded</li> <li>Semi-Frame &amp; Slim Temple Design</li> </ul>
Nose Piece	Flexible Nose Bridge for Universal Fit
Temple	<ul style="list-style-type: none"> <li>Dual-Material Temples</li> <li>Polycarbonate Temple with Ultra-Soft TPR Tip for All Day Comfort</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.49 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	0.1255
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord



Metallic Bronze Mirror



## Metallic - Premium Range

### Tough Metal Safety Frame Shades

Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Scratch-Resistant</li> <li>Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>Streamline Dual Lens Design 9.5 Base Curved Lens</li> </ul>
Frame	Lens Clipped to Frame
Nose Piece	<ul style="list-style-type: none"> <li>Bridge –Polycarbonate Assemble to the Frame</li> <li>Nose Pad- TPR Soft Nose Pad Provides Pressure-Free Fitting</li> <li>Flexible Nose Bridge for Universal Fit</li> </ul>
Temple	Black Fashion Design with Thin & Comfortable Fitting
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.50 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	0.1255
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Elite Bronze Mirror



## Elite - Premium Range

### Ultimate Safety & Comfort Shades

Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Scratch-Resistant</li> <li>Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light</li> <li>One-Piece Lens</li> <li>7 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit</li> </ul>
Frame	High Impact Resistant Brow-Bar Guards your Eyes from Flying Particles & Dust from Top
Nose Piece	TPR REACH Compliance Glued on Nose Bridge
Temple	<ul style="list-style-type: none"> <li>Co-Molded</li> <li>Vented Temple</li> <li>Non-Slip Temple for Snug Fitting</li> </ul>
Temple Tip	TPE Co-Molded Inserted into Temple End
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	15.09 kgs
Carton Dimension	82 x 23.50 x 63 cms
CBM / Carton	0.1214
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord

Flash Sky Red Mirror



## Flash - Premium Plus Range

### Flashily Shades

Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	8 Base Curved Lens Filters out more than 99.9% of Harmful UV Light
Frame	<ul style="list-style-type: none"> <li>Dual Lens Style</li> <li>Full Frame</li> <li>Gloss Black Color</li> </ul>
Nose Piece	Non-Slip & Ventilated Nose Piece
Temple	<ul style="list-style-type: none"> <li>Gloss Pearl Black</li> <li>Air Vented</li> <li>Straight Back Temples Provide Secure Fit</li> <li>Flexible Temples with Soft Temple Tips</li> </ul>
Hinges	<ul style="list-style-type: none"> <li>Nickle Silver 5-Barrel Type</li> <li>Inserted to Frame &amp; Temples</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	17.59 kgs
Carton Dimension	83 x 32 x 59 cms
CBM / Carton	0.1567
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Included	Pouch & Cord



## Vision Clear

Optimistic Splash Eyewear	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Style	Fits Over Prescription Glasses
Lens	<ul style="list-style-type: none"> <li>Polycarbonate Lens Protects Against Splash &amp; Dust</li> <li>High Impact Resistance Against Flying Particles</li> </ul>
Body	<ul style="list-style-type: none"> <li>Soft Vinyl Goggle Body Conforms to Facial Contours for a Very Comfortable Fit</li> <li>Indirect Vent with Perfect Over Ventilation Design</li> </ul>
Nose Piece	PVC Universal Integral to Frame
Headband	Fully Adjustable Textile Elastic Band
Weight / Carton	13.90 kgs
Carton Dimension	57 x 36 x 50 cms
CBM / Carton	0.0612
Packing / Carton	12 Packets (144 Pieces)
Origin	Taiwan



## Vision Grey

Cloudy Chem Eyewear	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Style	<ul style="list-style-type: none"> <li>Specific Design on the Sides of Goggle Body for Fitting Over Prescription Glasses</li> </ul>
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Polycarbonate Lens Protects Against Splash &amp; Dust</li> <li>High Velocity &amp; Impact Resistance Against Flying Particles</li> <li>Lens Filters out more than 99.9% of Harmful UV Light</li> </ul>
Body	<ul style="list-style-type: none"> <li>Cushion-Soft Vinyl Goggle Body &amp; Ultra-Wide Elastic Headband for Comfortable Fitting</li> </ul>
Nose Piece	PVC Universal Integral to Frame
Headband	Fully Adjustable Textile Elastic Band
Frame	<ul style="list-style-type: none"> <li>Translucent Frame for a Maximum Field of Vision</li> </ul>
Weight / Carton	16.21 kgs
Carton Dimension	58 x 37 x 53 cms
CBM / Carton	0.1137
Packing / Carton	15 Packets (90 Pieces)
Origin	Taiwan



## Vision Grey Visor Combo

Indirect-Vented Goggle	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Style	<ul style="list-style-type: none"> <li>A Pivot with 4 Position</li> <li>Adjustable</li> </ul>
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Polycarbonate Lens Protects Against Splash &amp; Dust</li> <li>High Velocity &amp; Impact Resistance Against Flying Particles</li> <li>Lens Filters out more than 99.9% of Harmful UV Light</li> </ul>
Body	<ul style="list-style-type: none"> <li>Cushion-Soft Vinyl Goggle Body &amp; Ultra-Wide Elastic Headband for Comfortable Fitting</li> </ul>
Nose Piece	PVC Universal Integral to Frame
Headband	Fully Adjustable Textile Elastic Band
Frame	<ul style="list-style-type: none"> <li>Translucent Frame for a Maximum Field of Vision</li> </ul>
Weight / Carton	7.50 kgs
Carton Dimension	51 x 40 x 30 cms
CBM / Carton	0.0612
Packing / Carton	30 Pieces
Origin	Taiwan



UltraSonic Goggle



Tactical Spoggle Clear

## UltraSonic Goggle

Full Vision Lab Goggles	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Single Lens Full Wraparound 6-Curved Base Lens Offers Superior Impact Protection &amp; Coverage</li> <li>Single Lens Filters out more than 99.9% of Harmful UV Light</li> </ul>
Head Band	<ul style="list-style-type: none"> <li>Fully Adjustable Buckle with Clip</li> <li>Suitable for Elastic &amp; Neoprene Strap</li> </ul>
Frame	<ul style="list-style-type: none"> <li>Indirect Ventilation for Splash &amp; Dust Resistance</li> <li>Co-Material Frame PP (Polypropylene) &amp; TPE</li> </ul>
Nose Piece	<ul style="list-style-type: none"> <li>Universal Fit Nose Bridge Conforms to Facial Contours to Ensure a Comfortable Fit</li> </ul>
Temple	<ul style="list-style-type: none"> <li>Black/Orange Unique Temple Design with Co-Injection Temple Tips for Extra Comfort</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	10.17 kgs
Carton Dimension	52 x 41 x 50 cms
CBM / Carton	0.1066
Packing / Carton	5 Packets (50 Pieces)
Origin	Taiwan



Tactical Spoggle Smoke



Included Pouch &amp; Cord



Tactical Spoggle Clear

## Tactical Spoggle

Foxy Eyewear	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	<ul style="list-style-type: none"> <li>Single Lens Full Wraparound 8-Curved Base Lens Offers Superior Impact Protection &amp; Coverage</li> <li>Single Lens Filters out more than 99.9% of Harmful UV Light</li> </ul>
Sponge	EVA Foam Soft Cushion, Fire Retardant
Frame	<ul style="list-style-type: none"> <li>Black, Nylon Foam Padded Frame for Dust Protection</li> <li>Direct Ventilation</li> </ul>
Nose Piece	<ul style="list-style-type: none"> <li>Nylon with CR Foam Universal</li> <li>Integral to Frame</li> </ul>
Temple	<ul style="list-style-type: none"> <li>Black/orange, Interchangeable Temples &amp; Headband Type</li> <li>Unique Temple Design with Co-Injection Temple Tips for Extra Comfort</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	22.50 kgs
Carton Dimension	84 x 31 x 58.5 cms
CBM / Carton	0.1523
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan



Rx Ultra Goggle Clear



Included Pouch &amp; Cord

## RX Ultra Goggle Clear

Corrective Eye Goggles	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	<ul style="list-style-type: none"> <li>9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light</li> <li>Removable RX Insert Included - To Fit</li> <li>Prescription Lenses (less than - 4.0 Diopter)</li> </ul>
Frame	<ul style="list-style-type: none"> <li>Black, Nylon Foam Padded Frame for Dust Protection</li> <li>Lens and Frame Vented to Increase Air Flow</li> </ul>
Nose Piece	<ul style="list-style-type: none"> <li>Nylon with CR Foam Universal</li> <li>Integral to Frame</li> </ul>
Temple	<ul style="list-style-type: none"> <li>Black, Interchangeable Temples &amp; Headband Type Ultra-Soft TPR Tip</li> <li>Air Vented</li> <li>Straight Back Temples Provide Secure Fit</li> </ul>
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.60 kgs
Carton Dimension	63 x 37 x 37 cms
CBM / Carton	0.0862
Packing / Carton	10 Packets (120 Pieces)
Origin	Taiwan





### Vision CL Vision SM

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV
Lens	9.75 Base Curved, Single Lens
Frame	Lightweight, Resilient & Durable Snug-Fitting Wrap Around Lens
Nose Piece	Universal, Integral to Lens
Temple	Spatula Type with Soft Insert TPR, Modern Temple Design
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	11.00 kgs
Carton Dimension	76 × 23 × 48 cms
CBM / Carton	0.0839
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



### Vision CL AF Vision SM AF

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV, Anti-Fog
Lens	9.75 Base Curved, Single Lens
Frame	Lightweight, Resilient & Durable Snug-Fitting Wrap Around Lens
Nose Piece	Universal, Integral to Lens
Temple	Spatula Type with Soft Insert TPR, Modern Temple Design
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	11.00 kgs
Carton Dimension	76 × 23 × 48 cms
CBM / Carton	0.0839
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



### Ray CL Ray SM

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV
Lens	9 Base Curved, Single Lens
Frame	Lightweight, Resilient & Durable Snug-Fitting Wrap Around Lens
Nose Piece	Universal, Integral to Lens
Temple	Spatula Type, Modern Temple Design
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	11.00 kgs
Carton Dimension	76 × 23 × 48 cms
CBM / Carton	0.0839
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



### Eyestar CL AF Eyestar SM AF

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV, Anti-Fog
Lens	9 Base Curved, Single Lens
Frame	Lens Clip In Frame, Co-molded Soft Brow-Guard
Nose Piece	Co-Molded, Integral to Lens
Temple	Co-Molded, Modern Temple Design, 3 Position Angle Adjust
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	13.00 kgs
Carton Dimension	83 × 28 × 48 cms
CBM / Carton	0.0112
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



## Storm CL AF Storm SM AF

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV, Anti-Fog
Lens	8 Base Curved, Single Lens
Frame	Dual Lens Style
Nose Piece	Soft Cushion Type, Non-Slip
Temple	Soft & Non-Slip
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	13.00 kgs
Carton Dimension	83 × 28 × 48 cms
CBM / Carton	0.0112
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



## Uni CL Uni SM

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV
Lens	4.25 Base Curved, Single Lens
Frame	Built-in Browguard. Sides Covered
Nose Piece	Universal, Integral to Lens
Temple	Spatula Type, Extentable. 4 Length Position Adjustable.
Screw	Stainless Steel Standard Hinge Screw
Colour	Clear Lens/ Smoke Lens
Weight / Carton	15.00 kgs
Carton Dimension	83 × 28 × 48 cms
CBM / Carton	0.0112
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



## Visitor CL Visitor SM

Polycarbonate Safety Spectacles	
Standard	CE EN166 ANSI Z87.1 Standards
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-UV
Lens	4 Base Curved, Single Lens
Frame	Built-in Browguard. Sides Covered
Nose Piece	Integral to Lens
Temple	Wide Spatula with Side Protection
Colour	Clear Lens/ Smoke Lens
Weight / Carton	16.00 kgs
Carton Dimension	83 × 34 × 48 cms
CBM / Carton	0.0135
Packing / Carton	12Pcs/Inner Box, 300Pcs/Carton
Origin	China



## Weld Goggle

Welding goggle for Welders	
Standard	CE EN166 FT Standard
Features	<ul style="list-style-type: none"> <li>• Round Type Flip-up,</li> <li>• Lens: Dark Lens, Dark Green</li> <li>• Frame Color: Green</li> <li>• Soft Flexible Frame &amp; Elasticated Head Strap</li> <li>• Lightweight &amp; Comfortable</li> <li>• Easy Fast Flip-up Lens</li> <li>• Unrestricted Peripheral Vision</li> <li>• Lateral Protection</li> <li>• Ventilated Browguard</li> </ul>
Weight / Carton	16.00 kgs
Carton Dimension	45 × 41 × 51 cms
CBM / Carton	0.0940
Packing / Carton	1Pc/OPP; 12Pcs/Inner Box, 300Pcs/Carton
Origin	China



## Weld Shield BK

Welding Helmet with Flip-up lens	
Standard	EN175, UKCA, ANSI Z87.1, Z94.3
Material	PP
Features	<ul style="list-style-type: none"> <li>Type: Worn on The Head</li> <li>Lens Holder: Flip Up</li> <li>Lens Size: 4 1/4" X 2" (108 X 51mm)</li> <li>Impact Resistance</li> <li>Includes Front &amp; Side</li> <li>Impact Resistance</li> <li>Resistance to Ignition &amp; Hot</li> </ul>
Colour	Black
Weight / Carton	15.50 kgs
Carton Dimension	50 x 46 x 54 cms
CBM / Carton	0.0124
Packing / Carton	1Pc/OPP, 30Pcs/Carton
Origin	China



## Bracket BK

Aluminum Visor Bracket	
Standard	DIN EN 166:2002-04
Material	Aluminum
Features	<ul style="list-style-type: none"> <li>The Visor Bracket Can Fit All FC Series Visors</li> <li>The Visor Bracket Can Be Combined With Most Safety Helmet</li> <li>Quick And Easy Visor Replacement</li> </ul>
Type	Spring
Colour	Black
Weight / Carton	13.00 kgs
Carton Dimension	51.50 x 42 x 50 cms
CBM / Carton	0.0108
Packing / Carton	1PC/OPP; 25pcs/inner, 100Pcs/Carton
Origin	China



## Brow Guard YW

High Impact Resistant ABS Brow Guard	
Standard	DIN EN 166:2002-04
Material	High Impact Resistance ABS
Features	<ul style="list-style-type: none"> <li>Headgear: Easy Manual Adjustment Headgear</li> <li>Quick &amp; Easy Visor Replacement</li> <li>Comprehensive Protection</li> <li>This browguard Can Fit All Universal Visors</li> </ul>
Type	Spring
Colour	Yellow
Weight / Carton	8.00 kgs
Carton Dimension	51 x 41 x 62 cms
CBM / Carton	0.1293
Packing / Carton	1Pc/OPP, 40Pcs/Carton
Origin	China



## Glass CL, 10, 12

Filter Glasses for Arc Welding	
Material	Glass
Features	<ul style="list-style-type: none"> <li>The Welding Filter Glass Offers Protection Against UV, IR Generated During The Welding Process</li> </ul>
Size	4 1/4" x 2" (108mm x 51mm)
Colour	Clear, Shade 10 & Shade 12
Weight / Carton	CL: 14kgs, 10/12: 17kgs
Packing / Carton	CL: 600Pcs, 10/12: 400Pcs
Origin	China



DuPont™  
**Nomex®**



## Balaclava / Face Hood

Fireman Balaclava	
Standard	BS EN 13911:2004
Features	<ul style="list-style-type: none"> <li>• Nomex® IIIA Comfortable</li> <li>• Knitted Fabric</li> <li>• 200-210 g/m2</li> <li>• Single Layer</li> <li>• Double Layers</li> <li>• Customized Solution Available</li> </ul>
Colors	<ul style="list-style-type: none"> <li>• Natural</li> <li>• Black</li> </ul>
Weight / Carton	10.50 kgs
Carton Dimension	71 x 41 x 25 cms
CBM / Carton	0.0727
Packing / Carton	100 Pieces
Origin	Pakistan

COOLMAX®



## Coolmax Balaclava

Beathable CoolMax® Lycra® Balaclava	
Standard	(FTC): FT0187937 (LYCRA Company Standard)
Material	Single Jersey, Coolmax, Lycra
Weight	175gsm
Features	Unisex, Lightweight, Moisture Wicking, Silk Like Hand Feel
Colour	Black
Weight / Carton	5.50 kgs
Carton Dimension	71.10 x 40.64 x 27.94 cms
CBM / Carton	0.0807
Packing / Carton	1Pc/Pkt; 100Pcs/Carton
Origin	Pakistan

GLADIOUS



## Cotton Hood

100% Cotton Face Cover	
Standard	CE CAT I
Material	Cotton
Features	Protect From Sun & Dust
Colors	<ul style="list-style-type: none"> <li>• Petrol Blue</li> <li>• Khaki</li> </ul>
Weight / Carton	13 kgs
Carton Dimension	50 x 39 x 26 cms
CBM / Carton	0.0507
Packing / Carton	100 Pieces
Origin	China

DuPont™  
**KEVLAR®**



## DuPont Kevlar Neck Protector

Cut Resistant Neck Sleeve (Protector)	
Material	Dupont® Kevlar®
Features	<ul style="list-style-type: none"> <li>• Stretchable Weave for Comfort, Cut Resistant, Abrasion Resistant</li> <li>• Specification: Stretchable, Unisex</li> <li>• Colour: Black</li> </ul>
Weight / Carton	8.50 kgs
Carton Dimension	71.10 x 40.64 x 27.94 cms
CBM / Carton	0.0807
Packing / Carton	1Pc/Pkt; 100Pcs/Carton
Origin	Pakistan



## Golden Welding Hood

Welding Hood, Golden Suede Leather	
Standard	CE Cat. I, EN:388
Features	<ul style="list-style-type: none"> <li>• Suede Leather</li> <li>• Velcro Fastening</li> <li>• Inside Mesh for Comfort</li> <li>• Kevlar® Stitching</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Size	Universal
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten Splash</li> <li>• Short Contact with Flames</li> <li>• Protection From Radiant Heat</li> </ul>
Weight / Carton	27.4kgs
Carton Dimension	37 x 33 x 64 cms
CBM / Carton	0.0781
Packing / Carton	50 Pieces
Origin	Pakistan



## Visor CL

Polycarbonate Clear Visor, Resistant to impact	
Standard	CE EN166 Standard
Material	Polycarbonate
Features	<ul style="list-style-type: none"> <li>• Polycarbonate Visor, Clear</li> <li>• Thickness: 1.0 mm</li> <li>• Size : 8" x 12" (20.30 cm x 30.5 cm)</li> <li>• Colour: Clear</li> </ul>
Weight / Carton	13.00 kgs
Carton Dimension	43 x 22 x 25 cms
CBM / Carton	0.0024
Packing / Carton	1Pc/PE Film; 100Pcs/Carton
Origin	China



3M 11819-00000-20



3M 11815-00000-20



## Virtua AP Series

Smart Fit	
Standard	ANSI/ISEA Z87.1-2010, CAN/CSA Z94.3-2007
Material	Polycarbonate
Lens Coating	Hard Coat Lens
Lens	<ul style="list-style-type: none"> <li>• Impact Resistant Polycarbonate Lens with 99.9% UV Protection</li> </ul>
Features	<ul style="list-style-type: none"> <li>• Frameless Design</li> <li>• Unisex Styling</li> <li>• A Selection of "Task-Specific" Lens Tints</li> <li>• Comfortable, Lightweight Frame</li> <li>• Weight Less than 1 oz</li> <li>• High-Wrap Lenses Fit Snug Against the Face for a Better Viewing Area</li> <li>• Polycarbonate Lenses Absorb 99.9% UV Rays</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• In Civil Construction</li> <li>• Chemical Industries</li> <li>• Petrochemical</li> <li>• Mining &amp; Industries in General</li> </ul>
Weight / Carton	0.73 kgs
Carton Dimension	37 x 17 x 15.5 cms
CBM / Carton	0.0098
Packing / Carton	20 Pieces
Origin	Taiwan

- EN 352-1 Headphones
- EN 352-2 Earplugs
- EN 352-3 Headphones fitted on an industrial protection helmet
- EN 352-4 Headphones to suit specific ambient noise levels
- EN 352-5 Headphones with noise reduction active control
- EN 352-6 Headphones audio communications capability
- EN 352-7 Inserts that attenuate sound to suit specific ambient noise levels

### Noise damping

It is the difference between the intensity of the “noise” to which the operator is exposed and that actually transmitted to the ear. The damping level is expressed in the following manners:

**HML:** this indicates the damping level based on the frequency of the noise: High (H), Medium (M), Low (L) frequency. The damping values are expressed through a number preceded by a letter of the frequency to which it refers.  
**SNR: (Simplified Noise Reduction):** it expresses the damping level of the protector through a single value

### PPE and daily exposure level

According to art. 193 D.Lgs 81/08, if the operator is exposed daily to:

- › 80 dBA the employer provides the workers with hearing PPE
- › 85 dBA the employer demands the workers to use hearing PPE

The employer takes into account the attenuation provided by the personal protection devices worn by workers to assess the efficiency of PPE and compliance with maximum values of noise exposure [87 dB(A)] Workers exposed to levels exceeding 80 dB (A) receive proper training and practical instruction (art. 195).



# HEARING PROTECTION





SNR 32dB  
NRR 26dB

## Solo Light

### Universal Headband Type Earmuff

Standard	EPA Regulation EN 352-1:2002 ANSI S3.19-1974, S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>• Designed for High Noise Environment &amp; Low Frequency Sounds</li> <li>• Combination of Specially Designed Spacer &amp; Cup</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	32dB
NRR	26dB
Weight / Carton	7.11 kgs
Carton Dimension	50 x 41 x 43 cms
CBM / Carton	0.088
Packing / Carton	20 Pieces
Origin	Taiwan



SNR 33dB  
NRR 29dB

## Solo Xtreme

### Universal Headband Type Earmuff

Standard	EPA Regulation EN 352-1:2002 ANSI S3.19-1974, S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>• Designed for High Noise Environment &amp; Low Frequency Sounds</li> <li>• Combination of Specially Designed Spacer &amp; Cup</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	33dB
NRR	29dB
Weight / Carton	8.69 kgs
Carton Dimension	51 x 42 x 43 cms
CBM / Carton	0.092
Packing / Carton	20 Pieces
Origin	Taiwan



SNR 32dB  
NRR 28dB

## Ultra Solo

### Universal Headband Stainless Steel

Standard	EPA Regulation EN 352-1:2002 ANSI S3.19-1974, S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>• Designed for High Noise Environment &amp; Low Frequency Sounds</li> <li>• Combination of Specially Designed Spacer &amp; Cup</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	32dB
NRR	28dB
Weight / Carton	12.00 kgs
Carton Dimension	50 x 41 x 43 cms
CBM / Carton	0.0882
Packing / Carton	20 Pieces
Origin	Taiwan



SNR 28dB  
NRR 26dB

## Cap Solo

### Cap Mounted Stainless Steel

Standard	EN352-1:2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>• Designed for High Noise Environment &amp; Low Frequency Sounds</li> <li>• Combination of Specially Designed Spacer &amp; Cup</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	28dB
NRR	26dB
Weight / Carton	10.50 kgs
Carton Dimension	68 x 48 x 36 cms
CBM / Carton	0.1175
Packing / Carton	20 Pieces
Origin	Taiwan



SNR 23dB

## Ear Muff Lite

Universal Headband Type Earmuff	
Standard	352-1:2002, Type: III Standards
Features	<ul style="list-style-type: none"> <li>Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>Designed for High Noise Environment Low &amp; Low Frequency Sounds</li> <li>The combination of Specially Designed Spacer &amp; Cup Helps to Provide Excellent Protection of Low Frequency Noise</li> <li>ABS Headband with CUP</li> <li>ABS Cup with Foam Inside</li> <li>Colour: Red/ Black</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Automotive</li> <li>Construction</li> <li>Light Industry</li> <li>Heavy Industry</li> <li>Logistics</li> </ul>
SNR	23dB
Weight / Carton	5.90 kgs
Carton Dimension	47 x 40 x 36 cms
CBM / Carton	0.0068
Packing / Carton	40Pcs/Carton
Origin	China



SNR 23dB

## Ear Muff Cap

High Attenuation Cap Mounted Earmuff	
Standard	352-1:2002, Type: III Standards
Features	<ul style="list-style-type: none"> <li>Cap Solo, Black Cup &amp; Red Hoop with Soft Foam Filled with Cushion for All Day Comfort</li> <li>Stainless Steel Wire Provides a Robust Construction</li> <li>Unique Double Shell Design for High Noise Reduction</li> <li>Non-Slip PU Ear Cushions Fit any Ear &amp; Improve Wearer Comfort</li> <li>Designed for High Noise Environment Low</li> <li>Headband: ABS</li> <li>Cup: Foam Covered with Leather</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Automotive</li> <li>Construction</li> <li>Light Industry</li> <li>Heavy Industry</li> <li>Logistics</li> </ul>
SNR	23dB
Weight / Carton	10.80 kgs
Carton Dimension	50 x 32 x 48 cms
CBM / Carton	0.0077
Packing / Carton	40Pcs/Carton
Origin	China



SNR 35dB  
NRR 30dB

## 3M H10A

3M™ PELTOR™ Optime™ 105 Earmuffs	
Standard	ANSI S3.19-1974
Material	ABS
Features	<ul style="list-style-type: none"> <li>Double-Shell Technology to Provide Effective Hearing Protection</li> <li>Proprietary Twin-cup™ Design Stainless Steel Headband for Consistent Force &amp; Effective Hearing Protection</li> <li>Ear Cup Pivot Points That Tilt for Optimum Comfort &amp; Efficiency</li> <li>Liquid/Foam Filled Earmuff Cushions</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Metal Processing</li> <li>Automotive Construction</li> <li>Textile Manufacturing</li> <li>Chemical &amp; Pharmaceutical</li> <li>Printing, Wood Working</li> </ul>
SNR	35dB
NRR	30dB
Weight / Carton	3.8 kgs
Carton Dimension	72 x 24 x 22 cms
CBM / Carton	0.038
Packing / Carton	10 Pieces
Origin	USA



SNR 30dB  
NRR 25dB

## 3M H9A

3M™ PELTOR™ Optime™ 98 Earmuffs	
Standard	ANSI S3.19-1974
Material	ABS
Features	<ul style="list-style-type: none"> <li>3M™ H9A Peltor™ Optime™ 98 Versatile Over-The-Head Earmuff</li> <li>Stainless Steel Headband for Consistent Force &amp; Effective Hearing Protection</li> <li>Earcup Pivot Points That Tilt for Optimum Comfort &amp; Efficiency</li> <li>Ultra Light Liquid/foam Filled Earmuff Cushions</li> <li>Color-Coding for Compliance Sighting</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Metal Processing</li> <li>Automotive Construction</li> <li>Textile Manufacturing</li> <li>Chemical &amp; Pharmaceutical</li> <li>Printing, Wood Working</li> </ul>
SNR	30dB
NRR	25dB
Weight / Carton	3 kgs
Carton Dimension	49 x 27 x 20 cms
CBM / Carton	0.0265
Packing / Carton	10 Pieces
Origin	USA


**3M**

### 3M H9P3E

**SNR 28dB**  
**NRR 23dB**

3M™ Peltor™ Optime™ 98 Cap-Mount	
Standard	ANSI S3.19-1974
Material	ABS
Features	<ul style="list-style-type: none"> <li>• 3M™ H9P3E Peltor™ Optime™ 98 Cap-Mount Earmuff</li> <li>• Earcup Pivot Points That Tilt for Optimum Comfort &amp; Efficiency</li> <li>• Ultra Light Weight Liquid/Foam Filled Earmuff Cushions</li> <li>• Color-Coding for Compliance Sighting</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Printing, Wood Working</li> </ul>
SNR	28dB
NRR	23dB
Weight / Carton	3.3 kgs
Carton Dimension	49 x 27 x 20 cms
CBM / Carton	0.0265
Packing / Carton	10 Pieces
Origin	USA


**EMPIRAL**

### Sync

**SNR 37dB**  
**NRR 32dB**

Disposable PU Ear Plug	
Standard	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Soft Polyurethane Foam Earplug Providing Extra Comfort</li> <li>• The Tapered Shaped is Designed to Fit Most Ear Canals</li> <li>• Hypo-Allergenic Material</li> <li>• The Bright Orange Color Permits High Visibility &amp; Makes Safety Checks Easier</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	37dB
NRR	32dB
Weight / Carton	5.80 kgs
Carton Dimension	67 x 29 x 39 cms
CBM / Carton	0.076
Packing / Carton	10 Packets (2000 Pairs)
Origin	Taiwan


**EMPIRAL**

### Sync Cord

**SNR 37dB**  
**NRR 32dB**

Disposable PU Ear Plug (Corded)	
Standard	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Soft Polyurethane Foam Earplug Providing Extra Comfort</li> <li>• Extra Comfort</li> <li>• Tapered Shaped is Designed to Fit Most Ear Canals</li> <li>• Hypo-Allergenic Material</li> <li>• The Bright Orange Color Permits High Visibility &amp; Makes Safety Checks Easier</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> </ul>
SNR	37dB
NRR	32dB
Weight / Carton	5.80 kgs
Carton Dimension	67 x 29 x 39 cms
CBM / Carton	0.076
Packing / Carton	10 Packets (1000 Pairs)
Origin	Taiwan


**GLADIOUS**

### Ear Cord

**SNR 34dB**  
**NRR 32dB**

Soft PU Foam Ear Plugs	
Standard	EN352-2: 2002 ANSI S3.19-1974
Features	<ul style="list-style-type: none"> <li>• A Unique, Tapered Shape Designed to Fit Most Ear Canals NRR 32 dB* SNR 34dB.</li> <li>• Soft, Hypoallergenic Foam for Enhance Comfort.</li> <li>• Comfortable Cloth Cord</li> <li>• Cotton Cord – Ideal for Multiple Use in a Day</li> <li>• Colour: Fluorescent Orange</li> <li>• Cord Colour: Orange</li> <li>• Diameter: 16.76mm</li> <li>• Length: 23.63mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Automotive General</li> <li>• Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Construction, Metal Processing</li> <li>• Textile, Wood Working</li> </ul>
SNR	34dB
NRR	32dB
Weight / Carton	8.70 kgs
Carton Dimension	58.5 x 34 x 41 cms
CBM / Carton	0.0082
Packing / Carton	20Boxes (2000pairs)
Origin	China



# 3M



## 3M 1100

SNR 34dB  
NRR 29dB

### 3M™ PU Foam Earplugs 1100, Uncorded

Standard	Class AL CSA Z94.2-1994 ANSI S3.19-1974
Features	<ul style="list-style-type: none"> <li>Soft Hypoallergenic PU Foam Offers Maximum Comfort</li> <li>Tapered Design Offers to Fit Comfortably in the Ear Canal</li> <li>Smooth &amp; Dirt Resistant Surface for Hygiene</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Metal Processing</li> <li>Automotive Construction</li> <li>Textile Manufacturing</li> <li>Chemical &amp; Pharmaceutical</li> <li>Cement Manufacturing</li> <li>Printing, Wood Working</li> <li>Foundry, Steelworks</li> <li>Mining &amp; Quarrying</li> </ul>
SNR	34dB
NRR	29dB
Weight / Carton	1.72 kgs
Carton Dimension	55 x 22 x 23 cms
CBM / Carton	0.0278
Packing / Carton	5 Packets (1000 Pairs)
Origin	Brazil

# 3M



## 3M 1110

SNR 34dB  
NRR 29dB

### 3M™ PU Foam Earplugs 1110, Corded

Standard	CSA Class - AL AS/NZS 1269 : 2005 Class - 3 / SLC 80 Rating CSA Z94.2 - 1994 EN 352 - 2
Features	<ul style="list-style-type: none"> <li>Soft Hypoallergenic PU Foam Offers Maximum Comfort</li> <li>Tapered Design Offers to Fit Comfortably in the Ear Canal</li> <li>Smooth &amp; Dirt Resistant Surface for Hygiene</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Facility Maintenance</li> <li>Grinding, Electrical</li> <li>Machine Operation</li> <li>Sanding, Welding</li> <li>Painting</li> <li>Blasting</li> <li>Assembly</li> <li>Cleaning</li> </ul>
SNR	34dB
NRR	29dB
Weight / Carton	1.41 kgs
Carton Dimension	55 x 20 x 23.5 cms
CBM / Carton	0.0259
Packing / Carton	5 Packets (500 Pairs)
Origin	Brazil

# EMPIRAL



## Ultra Ear

SNR 27dB  
NRR 21dB

### Reusable TPR Corded Earplug

Standard	CE EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	<ul style="list-style-type: none"> <li>Corded TPR Reusable Earplug</li> <li>Hard Stem to Push into the Ear for Better Fit</li> <li>Made from TRP Material</li> <li>The Bright Yellow Color Permits High Visibility &amp; Makes Safety Checks Easier</li> <li>Premoulded &amp; Triple Flanged</li> <li>Tips Stay Clean &amp; Washable</li> <li>Reduce Waste &amp; Cost</li> <li>Comfortable</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Metal Processing</li> <li>Automotive Construction</li> <li>Textile Manufacturing</li> <li>Chemical &amp; Pharmaceutical</li> <li>Cement Manufacturing</li> </ul>
SNR	27dB
NRR	21dB
Weight / Carton	14.3 kgs
Carton Dimension	66 x 37 x 32 cms
CBM / Carton	0.0781
Packing / Carton	10 Packets (1000 Pairs)
Origin	Taiwan

# GLADIOUS



## Ear Ultra

SNR 30dB

### Reusable Silicone Earplug

Standard	EN352-2: 2020 ANSI S3.19-1974
Features	<ul style="list-style-type: none"> <li>Reusable Four Flange Earplug for Premium Comfort &amp; Protection</li> <li>Pure Silicon Material for Low Pressure Inside The Ear</li> <li>Reusable Use for Long Time In Good Shape</li> <li>Cord Material: Nylon</li> <li>Colour: Yellow</li> <li>Cord Colour: Blue</li> <li>Diameter: 16.76mm</li> <li>Length: 23.63mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Automotive General</li> <li>Manufacturing</li> <li>Chemical &amp; Pharmaceutical</li> <li>Construction, Metal Processing</li> <li>Textile, Wood Working</li> </ul>
SNR	30dB
Weight / Carton	12 kgs
Carton Dimension	58.5 x 34 x 34 cms
CBM / Carton	0.0069
Packing / Carton	20Boxes (1000pairs)
Origin	China



SNR 37dB  
NRR 32dB

## Refill

Disposable Uncorded PU Earplug Refill	
Standard	EN 352-1:2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	<ul style="list-style-type: none"> <li>• Orange, Soft Hypoallergenic PU Foam Plug</li> <li>• Tapered Design Offers Easy Insertion &amp; Removal</li> <li>• Gently Expands &amp; Self Adjusts to All Size Ear Canals</li> <li>• Provides Comfortable Seal Without Pressure</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Processing</li> <li>• Automotive Construction</li> <li>• Textile Manufacturing</li> <li>• Chemical &amp; Pharmaceutical</li> <li>• Cement Manufacturing</li> <li>• Printing, Wood Working</li> <li>• Foundry, Steelworks</li> <li>• Mining &amp; Quarrying</li> </ul>
SNR	37dB
NRR	32dB
Weight / Carton	8 kgs
Carton Dimension	40 x 39 x 32 cms
CBM / Carton	0.0499
Packing / Carton	10 Bags (5000 Pairs)
Origin	Taiwan



## Dispenser

Uncorded Ear Plug Dispenser	
Standard	CE, CAT I
Material	ABS Plastic
Features	<ul style="list-style-type: none"> <li>• Accurately Dispenses One Earplug at a Time</li> <li>• Dispenses Earplug Directly into Hand</li> <li>• Durable ABS Plastic for Tough Environment</li> <li>• Free Standing / Wall Mounted</li> <li>• Shields Earplug from Wind &amp; Rain</li> <li>• Temperature Tolerance &amp; Smooth Operation</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Facility Maintenance</li> <li>• Grinding, Electrical</li> <li>• Machine Operation</li> <li>• Sanding, Welding</li> <li>• Painting</li> <li>• Blasting</li> <li>• Assembly</li> <li>• Cleaning</li> </ul>
Weight / Carton	6 kgs
Carton Dimension	69 x 49 x 36 cms
CBM / Carton	0.1217
Packing / Carton	4 Pieces
Origin	Taiwan



## Breathing Apparatus

EN 149	Dust filtering face masks
EN 140	Semi and quarter masks
EN 136	Full masks
EN 405	Anti-gas and/or dust filtering semi masks with valves
EN 143	Dust filters
EN 14387	Anti-gas and combined filters

### Dust Filtering Face Masks

x = Classes of pertinence	y = Duration	z = Resistance to clogging
1 = Low efficiency	R = Reusable	D = Dolomite
2 = Medium efficiency	NR = Non reusable, only for one shift	
3 = High efficiency		

Type	Protection
FFP1	Suitable for use in the presence of: iron, rust, concrete, stone, filling materials. Restrictions: not suitable for filtering cancerogenous particles or radio-active substances, microorganisms (virus, bacteria, fungi and spore) and enzymes.
FFP2	Suitable for use in the presence of: wood, steel, cement, paint, spray paint and anti-rust, fibreglass and mineral fiber, welding fumes, zinc, pesticides in water solution, flour, mould and spore, bacteria, soot. Restrictions: not suitable for filtering particles of radioactive substances, virus and enzymes.
FFP3	Suitable for use in the presence of stainless steel, anti-vegetative paint, asbestos, tuberculosis bacteria.

### Anti-Gas Filters

#### Classes of anti-gas filters

The filters are classified according to the absorption capacity, in other words the amount contaminant that the filter can absorb:

Type	Capacity	1 small	2 medium	3 large
A	Organic gas and vapours with boiling point above 65°C			
B	In organic gas and vapours			
E	Sulfur dioxide and other acid gas and vapours			
K	Ammonia and by-products			
AX	Organic gas and vapours with boiling point lower or equal to 65°C			
SX	Gas and vapours specifically indicated from manufacturer			
HgP3	Mercury vapours			
NOP3	Nitrogenated fumes			
P	Dust			



# RESPIRATORY PROTECTION





### Makrite™ Sekura-N95

N95 Foldable Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Vertical Folded Style Which is More Flexible Around the Edges &amp; Can Adapt to the Wearer's Facial Features</li> <li>• Exceptional Inside Filter for Lower Breathing Resistance</li> <li>• Individually Adjustable Plastic Nose Clip Allows User to Customize the Fit for Better Seal &amp; Helps to Reduce Eyewear Fogging</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• Neck-worn Adjustable Buckle</li> <li>• Design for Proper Fit</li> <li>• High Density Urethane Foam Nosepiece to Reduce Leakage</li> <li>• Filter Penetration</li> <li>• Nose Foam</li> <li>• Filter Media</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Painting, Coating, Mixing</li> <li>• Cutting, Drilling, Construction</li> </ul>
Weight / Carton	4.52 kgs
Carton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton	40pcs/box, 12 packets/carton
Origin	China




### Makrite™ Sekura-N95V

N95 Foldable Respirator with Valve	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Vertical Folded Style Which is More Flexible Around the Edges &amp; Can Adapt to the Wearer's Facial Features</li> <li>• Exceptional Inside Filter for Lower Breathing Resistance</li> <li>• Individually Adjustable Plastic Nose Clip Allows User to Customize the Fit for Better Seal &amp; Helps to Reduce Eyewear Fogging</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• Neck-worn Adjustable Buckle</li> <li>• Design For Proper Fit</li> <li>• High Density Urethane Foam Nosepiece to Reduce Leakage</li> <li>• Exhalation Valve Membrane Reduces Heat &amp; Moisture</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Painting, Coating, Mixing</li> <li>• Cutting, Drilling, Construction</li> </ul>
Weight / Carton	3.48 kgs
Carton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton	15pcs/box, 12 packets/carton
Origin	China



### Makrite™ 302P2w

FFP2 Respirator	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>• Vertical Fold Style that has a Soft Touch Makes it Exceptionally Easy to Wear &amp; Provide excellent contour fit</li> <li>• Excellent Filter Material for Low Breathing Resistance</li> <li>• Comfortable &amp; Lightweight Design</li> <li>• Individually Adjustable Nose Clip</li> <li>• Welded Head-Straps</li> <li>• A Full Inside Foam is Adapted on FFP3 Grade to Provide Even Better Secure Seal</li> <li>• Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs &amp; Other Eye Wears</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction &amp; Maintenance</li> <li>• Metal Working</li> <li>• Mining and Quarrying</li> </ul>
Weight / Carton	3.29 kgs
Carton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton	20pcs/box, 12 packets/carton
Origin	China

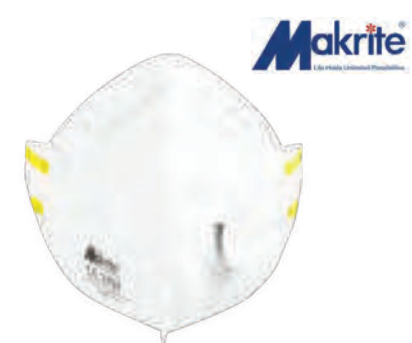

### Makrite™ 302P2Vw

FFP2 Respirator with Valve	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>• Vertical Fold Style that has a Soft Touch Makes it Exceptionally Easy to Wear &amp; Provide excellent contour fit</li> <li>• Excellent Filter Material for Low Breathing Resistance</li> <li>• Comfortable &amp; Lightweight Design</li> <li>• Individually Adjustable Nose Clip</li> <li>• Welded Head-Straps</li> <li>• A Full Inside Foam is Adapted on FFP3 Grade to Provide Even Better Secure Seal</li> <li>• Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs &amp; Other Eye Wears</li> <li>• One-way Exhalation Valve</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Metal Working</li> <li>• Mining and Quarrying</li> </ul>
Weight / Carton	3.70 kgs
Carton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton	15pcs/box, 12 packets/carton
Origin	China



## Makrite™ 9600-N95

### N95 Cone Respirator White Outer Layer

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Additional Benefit of Being Foldable for Easy Storage in a Worker's Pocket</li> <li>• The Ergonomic Design Provides Excellent Fit &amp; Comfort &amp; Can Be Easily Equipped With Safety Goggles &amp; Helmets</li> <li>• Exceptional Inside Filter for Very Low Breathing Resistance</li> <li>• Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• High Density Urethane Foam Nosepiece to Reduce Leakage &amp; Improve Worker Comfort</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Sanding, Grinding, Cutting</li> <li>• Drilling, Construction</li> <li>• Maintenance, Cleaning</li> </ul>
Weight / Carton	3.38 kgs
Carton Dimension	16.25 x 12.5 x 14.5 inch
CBM / Carton	0.048
Packing / Carton	20pcs/box, 12 packets/carton
Origin	China



## Makrite™ 9500-N95

### N95 Cone Respirator

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Designed To Protect Workers From Exposing to Solid Substances Free of Oil</li> <li>• The Cone Style of N95 Mask is the Most Widely Used Mask Work Environments</li> <li>• Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance &amp; Filtration Efficiency</li> <li>• Exceptional Inside Filter for Low Breathing Resistance</li> <li>• Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• High Density Urethane Foam Nosepiece for Great Fitness &amp; Worker Comfort</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Sanding, Grinding, Cutting</li> <li>• Drilling, Construction</li> </ul>
Weight / Carton	4.11 kgs
Carton Dimension	16.25 x 11.75 x 16.5 inch
CBM / Carton	0.052
Packing / Carton	20pcs/box, 12 packets/carton
Origin	China



## Makrite™ 9500V-N95

### N95 Respirator with Valve

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• High Performance Respirator with an Exhalation Valve to Make it Easier to Breathe Through in Hot or Humid Work Conditions</li> <li>• Valve Membrane</li> <li>• Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance &amp; Filtration Efficiency</li> <li>• Exceptional Inside Filter for Low Breathing Resistance</li> <li>• Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• High Density Urethane Foam Nosepiece for Great Fitness &amp; Worker Comfort</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Sanding, Grinding, Cutting</li> <li>• Drilling, Construction</li> </ul>
Weight / Carton	3.17 kgs
Carton Dimension	16.25 x 11.75 x 14.5 inch
CBM / Carton	0.045
Packing / Carton	10pcs/box, 12 packets/carton
Origin	China



## Makrite™ 9500-N95VOV

### N95 Respirator with Valve & OV

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• High Performance Respirator with an Exhalation Valve to Make it Easier to Breathe Through in Hot or Humid Work Conditions</li> <li>• Activated Carbon</li> <li>• Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance &amp; Filtration Efficiency</li> <li>• Exceptional Inside Filter for Low Breathing Resistance</li> <li>• Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>• Ultrasonic Welded Head-straps for Secure Seal</li> <li>• High Density Urethane Foam Nosepiece for Great Fitness &amp; Worker Comfort</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Sanding, Grinding, Cutting</li> <li>• Drilling, Construction</li> </ul>
Weight / Carton	3.58 kgs
Carton Dimension	16.25 x 11.75 x 14.5 inch
CBM / Carton	0.045
Packing / Carton	10pcs/box, 12 packets/carton
Origin	China



## Makrite™ MK910-N95

N95 Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>Breathing Resistance &amp; Filtration Efficiency for Non-Oil &amp; Smaller Size Particles</li> <li>Low Breathing Resistance Provide for a Very Comfortable Wear</li> <li>Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>Flanged Edge for Secure Facial Seal</li> <li>Ultrasonic Welded Head-straps for Secure Seal</li> <li>Thinner &amp; Longer PVC Foam for Worker Comfort</li> <li>N95 Particulate Filter (95% Filter Efficiency Level) Effective Against Particulate Aerosols Free Of Oil</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Sanding, Grinding, Cutting</li> <li>Drilling, Construction</li> <li>Maintenance, Cleaning</li> </ul>
Weight / Carton	4.32 kgs
Carton Dimension	16.25 x 11.75 x 16.5 inch
CBM / Carton	0.052
Packing / Carton	20pcs/box, 12 packets/carton
Origin	China



## Makrite™ MK910V-N95

N95 Respirator with Valve	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>Breathing Resistance &amp; Filtration Efficiency for Non-Oil &amp; Smaller Size Particles</li> <li>Low Breathing Resistance Provide for a Very Comfortable Wear</li> <li>Individually Adjustable Aluminum Nose Clip for Excellent Fit</li> <li>Flanged Edge for Secure Facial Seal</li> <li>Ultrasonic Welded Head-straps for Secure Seal</li> <li>Thinner &amp; Longer PVC Foam for Worker Comfort</li> <li>N95 Particulate Filter (95% Filter Efficiency Level) Effective Against Particulate Aerosols Free Of Oil</li> <li>One-way Valve</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Painting, Coating, Mixing</li> <li>Cutting, Drilling, Construction</li> </ul>
Weight / Carton	3.28 kgs
Carton Dimension	16.25 x 11.75 x 14.5 inch
CBM / Carton	0.045
Packing / Carton	10pcs/box, 12 packets/carton
Origin	China



## Makrite™ MKP3SLAVa

FFP3 Respirator with Valve	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>Flanged Sealed Edge Designed All Around Mask for Excellent Seal Between Face &amp; Mask</li> <li>Adjustable Head Straps</li> <li>Filter Media</li> <li>Nose Clip &amp; Foam</li> <li>Full Foam Seal</li> <li>Exhalation Valve &amp; Membrane Based Particles</li> <li>Ultrasonic Welded Head-straps for Secure Seal</li> <li>Thinner &amp; Longer PVC Foam for Worker Comfort</li> <li>The Filtering Respirator is Designed for Applications Involving Fine Non-Toxic Dust &amp; Fibers, Its Used to Protect the Wearer From Solid &amp; Liquid Aerosols Only</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Painting, Coating, Mixing</li> <li>Cutting, Drilling, Construction</li> </ul>
Weight / Carton	4.81 kgs
Carton Dimension	16.25 x 14.5 x 15.75 inch
CBM / Carton	0.061
Packing / Carton	10pcs/box, 12 packets/carton
Origin	China



## Makrite™ ENVI-P3VF

FFP3 Respirator with Valve	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>Makrite® ENVI Comfort Series Has Been Designed Without Any Metal &amp; Foam in the Construction to Make them Environmentally Friendly</li> <li>Excellent Filter Material for Low Breathing Resistance</li> <li>The Soft Inner Layer Provides for Maximum Comfort</li> <li>One-way Valve Reduces Heat &amp; Moisture Accumulate Inside the Mask for Better Comfort</li> <li>Easily Equipped With Safety Goggle, Helmet, Glasses, Earmuffs, &amp; Other Eye Wears</li> <li>FFP = Grade of Filtration Efficiency FFP3 is &gt;99%</li> <li>Flanged Edge for Secure Facial Seal</li> <li>The Soft Pre-Shaped Nose Area Ensures Excellent Fit</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Spray Painting, Plastering</li> <li>Asbestos Handling</li> </ul>
Weight / Carton	3.83 kgs
Carton Dimension	16.25 x 11.75 x 16.5 inch
CBM / Carton	0.052
Packing / Carton	10pcs/box, 12 packets/carton
Origin	China





## Makrite™ FIT-P3DSLAV

### FFP3 NR Respirator with Valve

Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>Exceptional Inside Filter for Low Breathing Resistance Softer Outer &amp; Inner Layer for Comfortable Fit</li> <li>Individually Adjustable Plastic Concealed Nose Clip for Excellent Fit</li> <li>Fully Adjustable Loop Headbands for Proper Fit</li> <li>One Way Valve Reduces Heat &amp; Moisture Accumulate Inside the Mask for Better Comfort</li> <li>High Density Urethane Foam Nosepiece for Great Fitness &amp; Worker Comfort</li> <li>Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs &amp; Other Eye Wears</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Painting, Coating, Mixing</li> <li>Cutting, Drilling, Construction</li> </ul>
Weight / Carton	4.82 kgs
Carton Dimension	20 x 12 x 19.625 inch
CBM / Carton	0.077
Packing / Carton	15pcs/box, 12 packets/carton
Origin	China



## Surgical Mask 75

### PP-NON Woven 3 Ply Mask

Standard	EN CAT 1
Color	Sky Blue
Weight	75 GSM
Size	17.50 cm x 9.50 cm
Features	<ul style="list-style-type: none"> <li>3 Ply Mask With Ear Loops</li> <li>Melt Blown Filter</li> <li>Very Low Resistance to Breathing</li> <li>High Filtration Capacity</li> <li>Soft Latex Free Elastic Loops</li> <li>Adjustable Nose Clip Embedded</li> <li>Comfortable to Wear Perfect Fit</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Medical</li> <li>Dental</li> <li>Occupational</li> <li>Construction</li> <li>Paint</li> <li>Allergies</li> </ul>
Weight / Carton	6.80 kgs
Carton Dimension	52 x 31.50 x 38.50 cms
CBM / Carton	0.0631
Packing / Carton	40 Packets (2000 Pieces)
Origin	China



## 3M™ 8210 N95

### Disposable Particulate Respirator

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>Cup Shaped Design With Welded Strap Attachment</li> <li>NIOSH Approved for At Least 95 Percent Filtration Efficiency Against Certain Non-Oil Based Particles</li> <li>Cushioning Nose Foam &amp; Adjustable Nose Clip Helps Provide A Custom Fit &amp; Secure Seal</li> <li>Lightweight Design to Increase Work &amp; Wear Time</li> <li>Advanced Electrostatic Media Is Designed for Ease of Breathing</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Commercial Buildings</li> <li>Construction</li> <li>Design &amp; Construction</li> <li>Food Processing</li> <li>Food Safety</li> <li>General Manufacturing</li> <li>Heavy Infrastructure</li> </ul>
Weight / Carton	2.50 kgs
Carton Dimension	52 x 30 x 22 cms
CBM / Carton	0.0343
Packing / Carton	8 Packets (160 Pieces)
Origin	USA



## 3M™ 9010 N95

### Disposable Particulate Respirator

Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>Vertical Flat Fold Design</li> <li>For Non-Oil Based Particles</li> <li>Adjustable Nose Clip Helps Provide a Custom Fit &amp; Secure Seal</li> <li>Lightweight Design to Increase Work &amp; Wear Time</li> <li>Advanced Electrostatic Media Is Designed for Ease of Breathing</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Commercial Buildings</li> <li>Construction</li> <li>Design &amp; Construction</li> <li>Food Processing</li> <li>Food Safety</li> <li>General Manufacturing</li> <li>Heavy Infrastructure</li> <li>Mining, Oil &amp; Gas</li> </ul>
Weight / Carton	6.50 kgs
Carton Dimension	67 x 30 x 30 cms
CBM / Carton	0.0603
Packing / Carton	10 Packets (500 Pieces)
Origin	China



### 3M™ 9010V N95

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-up Inside the Respirator</li> <li>• Two Strap Design With a Comfortable Nose Clip &amp; Advanced Electret Media Help Make Breathing Easier &amp; Cooler</li> <li>• Adjustable Noseclip Helps Reduce Potential for Eyewear Fogging &amp; Ensure a Better Seal &amp; Fit</li> <li>• Each Respirator is Individually Packaged to Offer Convenient Storage &amp; Portability</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Commercial Buildings</li> <li>• Construction</li> <li>• Design &amp; Construction</li> <li>• Food Processing</li> </ul>
Weight / Carton	5.10 kgs
Carton Dimension	67 x 30 x 30 cms
CBM / Carton	0.06
Packing / Carton	10 Packets (200 Pieces)
Origin	China



### 3M™ 8511 N95

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Ideally Suited for Hot/Dusty Work Settings that Require Long Periods of Wear</li> <li>• At Least 95 Percent Filtration Efficiency Against Certain Non-Oil Based Particles 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-Up Inside the Respirator</li> <li>• Braided Headbands</li> <li>• Spacious &amp; Durable</li> <li>• Designed to Increase Comfort &amp; Wearability</li> <li>• Advanced Electret Media Designed for Ease of Breathing</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Agricultural</li> <li>• Commercial Buildings</li> <li>• General Manufacturing</li> <li>• Heavy Infrastructure</li> <li>• Industrial Maintenance</li> <li>• Mining, Oil &amp; Gas</li> </ul>
Weight / Carton	2.34 kgs
Carton Dimension	52 x 33 x 23 cms
CBM / Carton	0.0395
Packing / Carton	8 Packets (80 Pieces)
Origin	USA



### 3M 8514 N95

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Used in Certain Applications Involving Metal Fumes</li> <li>• Flame Resistant Per Modified ASTM D2859</li> <li>• Carbon Filter Layer Reduces Exposure to Nuisance Level Odors</li> <li>• 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-up Inside the Respirator</li> <li>• Soft Nose Foam Adjustable Noseclip &amp; Straps</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Agricultural</li> <li>• General Manufacturing</li> <li>• Mining</li> <li>• Oil &amp; Gas</li> <li>• Transportation</li> </ul>
Weight / Carton	4.33 kgs
Carton Dimension	52 x 40 x 28 cms
CBM / Carton	0.0582
Packing / Carton	8 Packets (80 Pieces)
Origin	USA



### 3M 8247 R95

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• Carbon Layer Helps Reduce Nuisance Levels of Organic Vapors</li> <li>• Collapse Resistant Shell</li> <li>• Adjustable Noseclip Helps Provide a Custom Secure Seal</li> <li>• Advanced Electrostatic Media - With Highly Charged Microfibers to Enhance the Capture of Airborne Particles While Allowing you to Breathe Easier</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Agricultural</li> <li>• General Manufacturing</li> <li>• Mining</li> <li>• Oil &amp; Gas</li> <li>• Transportation</li> </ul>
Weight / Carton	2.70 kgs
Carton Dimension	40 x 28 x 26 cms
CBM / Carton	0.03
Packing / Carton	6 Packets (120 Pieces)
Origin	USA



### 3M 8233 N100

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	<ul style="list-style-type: none"> <li>• NIOSH's Highest Rated Filtration Efficiency in a Disposable Respirator N100</li> <li>• 3M™ Cool Flow™</li> <li>• Exhalation Valve Reduces Heat Build-Up Inside the Respirator</li> <li>• Compatible With a Variety Of Protective Eyewear &amp; Hearing Protection</li> <li>• Adjustable Noseclip Helps Provide a Custom Secure Seal</li> <li>• Individually Packaged</li> <li>• Advanced Electret Media is Designed for Ease of Breathing</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• General Manufacturing</li> <li>• Marine</li> <li>• Mining</li> <li>• Oil &amp; Gas</li> <li>• Transportation</li> </ul>
Weight / Carton	12.75 kgs
Carton Dimension	52 x 30 x 22 cms
CBM / Carton	0.0343
Packing / Carton	1 Packet (20 Pieces)
Origin	USA



### 3M™ 8822 FFP2

Disposable Particulate Respirator	
Standard	AS/NZ 1716:2012
Features	<ul style="list-style-type: none"> <li>• Lightweight Construction Promotes Greater Comfort &amp; Contributes to Increased Wear Time</li> <li>• The Cupped Shape, Twin Strap Design Adjustable Steel Nose Clip Provides a Custom Fit With Fewer Pressure Points &amp; a Secure Face Seal</li> <li>• Patented One-Way Valve Offers Easy Exhalation &amp; Cooler, Drier Comfort for Use Against Both Mechanically Generated Particulates &amp; Thermally Generated Fumes &amp; Smokes</li> <li>• All Filter Design Provides Economical Protection With No Cleaning Required</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Foundries, Light Welding</li> <li>• Furnaces, Leadwork</li> </ul>
Weight / Carton	6 kgs
Carton Dimension	56 x 43 x 26 cms
CBM / Carton	0.0558
Packing / Carton	24 Packets (240 Pieces)
Origin	UK



### 3M™ 9322+ FFP2

Disposable Particulate Respirator	
Standard	AS/NZS 1716:2012
Features	<ul style="list-style-type: none"> <li>• Foldable, Easy To Store, 3-panel Design</li> <li>• Embedded Nose Clip is Concealed &amp; is Metal Detectable</li> <li>• Nose Clip is Kept Securely in Place Within the Layers of the Respirator</li> <li>• 3M Low Breathing Resistance Filter Technology Gives Effective Filtration</li> <li>• Embossed Top Panel of The Respirator Helps to Reduce Fogging of Eyewear</li> <li>• 3M™ Cool Flow™ Exhalation Valve Offers Improved Comfort in Hot Humid Environments</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction, Manufacture</li> <li>• Pharmaceutical</li> </ul>
Weight / Carton	3.30 kgs
Carton Dimension	49 x 26.50 x 43 cms
CBM / Carton	0.0558
Packing / Carton	12 Packets (120 Pieces)
Origin	UK



### 3M™ 8835 FFP3

Disposable Particulate Respirator	
Standard	EN 149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>• Soft Inner Ring Improves Face Seal, Wearer</li> <li>• Comfort Robust Shell &amp; Cup Design Provides Multi-shift Capability</li> <li>• 4 Point Adjustable Braided Headbands Help Achieve a More Secure Feel</li> <li>• 3M™ Advance Electret Filter Material Gives Effective Filtration With Low Breathing Resistance for Consistent High Quality Performance</li> <li>• 3M™ Cool Flow™ Exhalation Valve Offers Improved Comfort in Hot Humid Environments</li> <li>• Adjustable Buckle Straps Lightweight, off-the-face Design</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Metal Processing</li> </ul>
Weight / Carton	3 kgs
Carton Dimension	62 x 39 x 23 cms
CBM / Carton	0.06
Packing / Carton	10 Packets (50 Pieces)
Origin	UK





3M

### 3M™ 6200 M / 3M™ 6300 L

#### (TPR) Reusable Half Face Mask Respirator

Standard	NIOSH / EN 140:1998
Features	<ul style="list-style-type: none"> <li>• This Series Combines Comfort &amp; Convenience</li> <li>• Comfortable Soft, Lightweight Face-piece With Easy-to-Adjust Head Straps</li> <li>• NIOSH Approved For Negative Pressure Air Purifying &amp; Supplied Air Dual Airline Applications</li> <li>• Can Be Disassembled, Cleaned &amp; Reused</li> <li>• Replaceable Cartridges &amp; Filters Allow Reuse of Face-piece for Cost Savings</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Design &amp; Construction</li> <li>• General Manufacturing</li> <li>• Heavy Infrastructure</li> <li>• Industrial Maintenance</li> <li>• Marine</li> <li>• Mining</li> <li>• Oil &amp; Gas</li> <li>• Transportation</li> </ul>
Weight / Carton	3.40 kgs
Carton Dimension	56 x 41.50 x 13.50
CBM / Carton	0.0314
Packing / Carton	24 Pieces
Origin	USA / Poland



3M

### 3M™ 7502 M / 3M™ 7503 L

#### Silicone Half Face Mask Respirator

Standard	NIOSH / EN 140:1998
Features	<ul style="list-style-type: none"> <li>• Advance Silicone Material for Increased Comfort &amp; Greater Durability</li> <li>• Proprietary 3M™ Cool Flow™ Valve Helps Makes Breathing Easier</li> <li>• Dual-mode Head Harness Adjusts Easily for Either Standard or Drop-down Mode</li> <li>• Exhalation Valve Cover Directs Exhaled Breath &amp; Moisture Downward to Reduce Fogging</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Food &amp; Beverage Manufacturing</li> <li>• General Manufacturing</li> <li>• Heavy Industrial</li> <li>• Manufacturing</li> <li>• Marine &amp; Oil &amp; Gas</li> <li>• Pharmaceutical</li> </ul>
Weight / Carton	3 kgs
Carton Dimension	45 x 31 x 16 cms
CBM / Carton	0.0223
Packing / Carton	10 Pieces
Origin	USA



3M

### 3M™ 6800 M / 3M™ 6900 L

#### Silicone/TPE Full Face Mask Respirator

Standard	NIOSH OSHA EN-136:1998 CLASS 1
Features	<ul style="list-style-type: none"> <li>• Large Lens Provides a Wide Field of View for Excellent Visibility</li> <li>• Lightweight Well-balanced Design &amp; Silicone Face Seal for Enhanced Comfort, Durability &amp; Ease of Cleaning</li> <li>• Available in Air-purifying &amp; Supplied Air Respirator Modes</li> <li>• Center Adapter Directs Exhaled Breath Downward</li> <li>• 3M Cool Flow™ Valve Makes Breathing Easier To Provide Cool, Dry Comfort</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Design &amp; Construction</li> <li>• Food &amp; Beverage Manufacturing</li> <li>• General Manufacturing</li> <li>• Heavy Industrial</li> </ul>
Weight / Carton	3 kgs
Carton Dimension	41 x 31 27 cms
CBM / Carton	0.0343
Packing / Carton	4 Pieces
Origin	USA

3M



### 3M™ 6001

#### Organic Vapor Cartridge

Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	<ul style="list-style-type: none"> <li>• NIOSH Approved for Protection Against Certain Organic Vapors</li> <li>• Swept-Back Design Allows An Enhanced Field of View &amp; Comfort</li> <li>• Bayonet Compatibility Allows Use With Many 3M Half &amp; Full Face-piece Designs</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Design &amp; Construction</li> <li>• Facility Sanitation</li> <li>• Food Processing</li> <li>• Food Safety</li> </ul>
Weight / Carton	6.30 kgs
Carton Dimension	52 x 24 x 20 cms
CBM / Carton	0.025
Packing / Carton	30 Sets
Origin	USA

3M



### 3M™ 6003

#### Organic Vapor / acid Gas Cartridge

Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	<ul style="list-style-type: none"> <li>• NIOSH Approved for Protection Against Certain Organic Vapors or Acid Gases</li> <li>• Swept-back Design Allows An Enhanced Field of View &amp; Comfort</li> <li>• Bayonet Compatibility Allows Use With Many 3M Half &amp; Full Face-piece Designs</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Facility Sanitation</li> <li>• Food Processing</li> <li>• Food Safety</li> <li>• General Manufacturing</li> <li>• Oil &amp; Gas</li> </ul>
Weight / Carton	6.50 kgs
Carton Dimension	52 x 24 x 21 cms
CBM / Carton	0.0262
Packing / Carton	30 Sets
Origin	USA

3M



### 3M™ 6006

#### Universal Gas & Vapour Cartridge

Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	<ul style="list-style-type: none"> <li>• Niosh Approved for Protection Against Certain Organic Vapors, Acid Gases, Ammonia, Methylamine &amp; Formaldehyde</li> <li>• Swept-back Design Allows An Enhanced Field of View &amp; Comfort</li> <li>• Bayonet Compatibility Allows Use With Many 3M Half &amp; Full Face-piece Designs</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Facility Sanitation,</li> <li>• General Manufacturing</li> <li>• Mining, Oil &amp; Gas,</li> </ul>
Weight / Carton	7.40 kgs
Carton Dimension	52 x 24 x 21 cms
CBM / Carton	0.0262
Packing / Carton	30 Sets
Origin	USA

3M



### 3M™ 2091 P100

#### Particulate Filter

Standard	NIOSH / A 120311
Features	<ul style="list-style-type: none"> <li>• Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria</li> <li>• Advanced Electret Media (AEM) Provides Lightweight, Easy Breathing Comfort</li> <li>• Versatile Protection Against Many Oil &amp; Non-oil Based Particulate Contaminants</li> <li>• Bayonet Compatibility Allows Use With Many 3M™ Half &amp; Full Face-piece Designs</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Facility Sanitation</li> <li>• Food Processing</li> <li>• General Manufacturing</li> <li>• Heavy Infrastructure</li> </ul>
Weight / Carton	2.10 kgs
Carton Dimension	44 x 26 x 23 cms
CBM / Carton	0.0263
Packing / Carton	50 Sets
Origin	USA



### 3M™ 2097 P100

Particulate Filter	
Standard	NIOSH / A 120311
Features	<ul style="list-style-type: none"> <li>Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria</li> <li>Versatile Protection Against Many Oil &amp; Non-oil Based Particulate Contaminants</li> <li>Nuisance Odor Relief for Organic Vapor Levels Below the Permissible Exposure Level (PEL)</li> <li>Bayonet Compatibility Allows Use With Many 3M™ Half &amp; Full Face-piece Designs</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Construction</li> <li>Facility Sanitation,</li> <li>Food Processing,</li> <li>General Manufacturing</li> </ul>
Weight / Carton	2.10 kgs
Carton Dimension	44 x 26 x 23 cms
CBM / Carton	0.0263
Packing / Carton	50 Sets
Origin	USA



### 3M™ 5N11

Particulate Prefilter	
Standard	NIOSH / 22J1122
Features	<ul style="list-style-type: none"> <li>NIOSH Approved for Environments Containing Certain Non-oil-based Particles</li> <li>Use on Top of 3M Gas &amp; Vapor Cartridges With</li> <li>3M™ 501 Retainer When Particles Are Also Present</li> <li>Use On Top Of 3M™ 603 Filter Holder &amp; 3M™ 501 Retainer To Reduce Particulate Exposure</li> <li>Replaceable Particle Filter for Cost Savings</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Construction,</li> <li>Facility Sanitation</li> <li>Food Safety</li> <li>General Manufacturing</li> <li>Heavy Industrial</li> </ul>
Weight / Carton	0.91 kgs
Carton Dimension	46 x 23.50 x 10 cms
CBM / Carton	0.0108
Packing / Carton	10 Packets (100 Pieces)
Origin	USA



### 3M™ 501

Filter Retainer	
Standard	CE 0086
Features	<ul style="list-style-type: none"> <li>Approved 3M System Component</li> <li>Designed to Hold 3M Particulate Filter 5N11 &amp; 5p71/07194 (Aad) (Sold Separately)</li> <li>Component Works With 3M Respirator 5000 Series, 3M Cartridges 6000 Series &amp; 3M™ Filter Adapter 603</li> </ul>
Color	Translucent white
Size	4" high x 8.5" long x 4.5" wide
Applications	<ul style="list-style-type: none"> <li>Construction</li> <li>General Manufacturing</li> <li>Heavy Industrial</li> <li>Manufacturing</li> <li>Oil &amp; Gas</li> <li>Pharmaceutical</li> <li>Transportation</li> </ul>
Weight / Carton	1.65 kgs
Carton Dimension	53 x 23 x 13.50 cms
CBM / Carton	0.0165
Packing / Carton	5 Packets (50 Pieces)
Origin	USA



### Spiroscape EEBD (PSI)

Emergency Escape Breathing Device	
Approval	NIOSH 2014/90/EU Marine Equipment
Standard	42 CFR Part 84
Features	<ul style="list-style-type: none"> <li>Unique Automatic Ambient Air Valve Eliminates Risk of Suffocation</li> <li>Unique Patented Air Supply System in the Hood Maximizes Duration &amp; Minimizes Dead Space</li> <li>Two-layered Hood Positions the Inner Mask Correctly Very Flexible Neck Seal Makes it Easy to Don &amp; Comfortable to Wear</li> <li>Quiet Air Delivery System Allows Voice Communication Bag Equipped With Carrying Strap</li> </ul>
Technical Details	EEBD Steel Cylinder 15 Minutes Escape Time With 3000 PSI Cylinder
Connection	Cylinder Neck M18
Dimensions	20 x 9.0 x 5.0 inch
Weight	15 min - 9.2 lbs / 10 min - 9.5 lbs (empty cylinder)





## Dust Mask Pro

Disposable Dust Mask	
Standard	EN Cat. I
Features	<ul style="list-style-type: none"> <li>• Disposable, Cool &amp; Comfortable</li> <li>• Lightweight Construction, Economical Choice</li> <li>• Not NIOSH, CE &amp; AS/NZS Approved</li> <li>• Usage: Provides Relief From Nuisance Dusts Such As Alfalfa, Pollen, Animal Dander, Sawdust &amp; Other Non-toxic Dusts</li> <li>• Class Nuisance Masks</li> <li>• Head Strap: Elastic Band</li> </ul>
Applications	Construction, Workshop
Material	Needle Punch Polypropylene
Weight / Carton	5.70 kgs
Carton Dimension	59.50 x 24.50 x 31.50 cms
CBM / Carton	0.0046
Packing / Carton	50Pcs/Pkt, 20Pkts/Carton
Origin	China



## Respire FFP2

FFP2 NR Particulate Respirator, Half Mask	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>• Excellent Filter Material for Low Breathing Resistance</li> <li>• The Soft Inner Layer Provides for Maximum Comfort on The User's Face</li> <li>• FFP2 Series Are Tested &amp; Comply With EU PPE</li> <li>• Regulation EN149:2001+A1:2009</li> </ul>
Applications	Metal Working, Mining & Quarrying
Material	Non-Woven + Needle Punch Polypropylene
Weight / Carton	5.90 kgs
Carton Dimension	67 x 27 x 41.50 cms
CBM / Carton	0.0075
Packing / Carton	20Pcs/Inner Box, 20Box/Carton
Origin	China



## Respire V FFP2

FFP2 NR Particulate Respirator, Half Mask with Valve	
Standard	EN149:2001+A1:2009
Features	<ul style="list-style-type: none"> <li>• Excellent Filter Material for Low Breathing Resistance</li> <li>• The Soft Inner Layer Provides for Maximum Comfort on The User's Face</li> <li>• FFP2 Series Are Tested &amp; Comply With EU PPE</li> <li>• Regulation EN149:2001+A1:2009</li> </ul>
Applications	Metal Working, Mining & Quarrying
Material	Non-Woven + Needle Punch Polypropylene
Weight / Carton	5.00 kgs
Carton Dimension	67 x 27 x 41.50 cms
CBM / Carton	0.0075
Packing / Carton	12Pcs/Inner Box, 20Box/Carton
Origin	China

## EN 340 General requirements for protective clothing

This European Standard specifies general performance requirements for ergonomics, innocuousness, size designation, ageing, compatibility and marking of protective clothing and the information to be supplied by the manufacturer with the protective clothing

## EN 471 High visibility clothing for professional use



Protective clothing able to visually indicate the presence of the user in daylight and in the light of vehicle headlights in the darkness

X = The surface area of fluorescent and retroreflective materials. Garment class (from 1 to 3)

Minimum surfaces of visible material (m2)	Class 3	Class 2	Class 1
Background material	0,8	0,5	0,14
Retro-reflective material	0,2	0,13	0,10
Combined performance material	-	-	0,2
Example	Jacket	Trouser	Belts

Y = Retro-reflective material class (from 1 to 2)

Class 1 Reflectance of minor bands

**EN 1150** Sets the standard that high visibility clothing needs to meet to ensure that the wearer is clearly visible to motorists against the background in ALL weather and lighting conditions (bright daylight as well as rain, mist, dusk and night-time). To achieve this, clothing must have a combination of fluorescent material for daytime visibility and reflective material for night-time and low light conditions.

## EN 342 Protection against cold



Suits and clothing for body protection against cold environments at temperatures below - 5 °C

- A Effective thermal insulation \* (B, C or R) \*\*
- B Resulting effective thermal insulation \* (B, C or R) \*\* (Optional)
- C Air permeability (from 1 to 3)
- D Resistance to water penetration (from 1 to 2) (Optional)
- X Indicates that the garment has not been tested

\* measured in m2 x K / W

\*\* type of underwear used in the test





## Chief C

100% Twill Cotton Coverall	
Standard	CE, EN CAT 1
Fabric Weight	195 GSM
Features	<ul style="list-style-type: none"> <li>• Full Sleeves Coverall</li> <li>• Sanforized, Mercerized &amp; Pre-shrunk</li> <li>• Two Way Zipper With Storm Flap</li> <li>• Pen Pocket on Arm</li> <li>• Elasticated Waist Band for Extra Comfort</li> <li>• 1 Upper Chest Snap Fastener</li> <li>• 2 Chest Pockets With Velcro Flap</li> <li>• Trouser With 2 Swing Pockets</li> <li>• 2 Side Pockets With Velcro Flaps &amp;</li> <li>• 2 Patch Pockets</li> </ul>
Sizes	S - 7XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/forklift &amp; Other Moving Equipment Operation</li> <li>• Protection From UV Light</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Weight / Carton	16.33 kgs
Carton Dimension	51.50 x 39.00 x 32.50 cms
CBM / Carton	0.0653
Packing / Carton	25 Pieces
Origin	China



## Chief PS

100% Twill Cotton Pant/Shirt	
Standard	CE, EN CAT 1
Fabric Weight	195 GSM
Features	Sanforized, Mercerized & Pre-shrunk
Shirt	<ul style="list-style-type: none"> <li>• 5 Metal Buttons Stitched on Shirt</li> <li>• Full Sleeves Shirt</li> <li>• Snap Fastener Stitched on Sleeves Cuff</li> <li>• 2 Chest Pockets With Button Flap</li> <li>• 2 Lower Swing Pockets</li> </ul>
Pant	<ul style="list-style-type: none"> <li>• 2 Swing Pockets</li> <li>• 2 Side Pockets With Velcro Flap</li> <li>• 2 Back Pockets</li> <li>• Elasticated Waist Band for Extra Comfort</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/forklift &amp; Other Moving Equipment Operation</li> <li>• Protection From UV Light</li> </ul>
Weight / Carton	18.24 kgs
Carton Dimension	54.50 x 39.50 x 32.50 cms
CBM / Carton	0.0700
Packing / Carton	25 Pieces
Origin	China









## Chief C Tapes

100% Twill Cotton Coverall with Tapes	
Standard	CE, EN CAT 1
Fabric Weight	195 GSM
Features	<ul style="list-style-type: none"> <li>• Full Sleeves Coverall</li> <li>• Sleeves With Slant Stitches</li> <li>• One Chest Pocket On Left Side &amp; Snap Fastener In The Middle</li> <li>• Front Fly With Zipper Closure Having Both Sides With Horizontal Bartacks</li> <li>• Upper With One Snap Fastener</li> <li>• Elasticated Waist Band</li> <li>• Trouser With Swing Pockets</li> <li>• Back Pocket on Right With Four Eyelet Nylon Buttons Closure</li> <li>• Ruler Pocket on Right Back</li> <li>• 5 Cm Tape Shoulder, Sleeves &amp; Leg</li> <li>• Sanforized, Mercerized &amp; Pre-shrunk</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Weight / Carton	19 kgs
Carton Dimension	51 x 39 x 28 cms
CBM / Carton	0.0557
Packing / Carton	25 Pieces
Origin	China



## Chief PS Tapes

100% Twill Cotton Pant/Shirt with Tapes	
Standard	CE, EN CAT 1
Fabric Weight	195 GSM
Shirt	<ul style="list-style-type: none"> <li>• Full Sleeves Shirt</li> <li>• 5 Cm Tape Cross Shoulder</li> <li>• Sleeves With Slant Stitches With 5 Cm Tape Around</li> <li>• Two Chest Pocket, left Pocket With Flap, snap Button</li> <li>• Two Big Insert Pocket on the Bottom</li> <li>• Pocket Opening With Vertical Bartack</li> <li>• Front Fly With Metal Button Closure</li> <li>• Sleeves Opening With Snap Fastener</li> </ul>
Pant	<ul style="list-style-type: none"> <li>• Elasticated Waist Band With 6 Loops</li> <li>• 1 Button in Front Zipper Closure</li> <li>• Insert Pocket on Both Sides</li> <li>• Back Pocket on Right With Four Eyelet Nylon Buttons Closure</li> <li>• Ruler Pocket on Right Back</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Weight / Carton	19 kgs
Carton Dimension	51 x 39 x 28 cms
CBM / Carton	0.0557
Packing / Carton	25 Pieces
Origin	China



## Comfort C

### 100% Premium Cotton Coverall with Tapes

Standard	CE, EN CAT 1
Fabric Weight	270 GSM
Features	<ul style="list-style-type: none"> <li>• Sanforized, Mercerized &amp; Pre-shrunk</li> <li>• 2 Inches 6 Sides Reflective Taps</li> <li>• Adjustable Velcro Cuff</li> <li>• Two Way HD Zipper With Metal Snap</li> <li>• Elasticated Waist Band for Extra Comfort</li> <li>• 3 Chest Pockets With Velcro Flap</li> <li>• 1 Pen Pocket on Left Arm</li> <li>• 2 Front Swing Pockets</li> <li>• 2 Back Pockets in Trousers With Button</li> </ul>
Sizes	S - 7XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/Forklift &amp; Other Moving Equipment Operation</li> <li>• Protection From UV Light</li> <li>• Welding &amp; Gridding Works</li> </ul>
Weight / Carton	18.50 kgs
Carton Dimension	60 x 40 x 32 cms
CBM / Carton	0.0768
Packing / Carton	20 Pieces
Origin	China



## Comfort PS

### 100% Premium Cotton Pant / Shirt with Tapes

Standard	CE, EN CAT 1
Fabric Weight	270 GSM
Shirt	<ul style="list-style-type: none"> <li>• Collar, Cuff, Chest Pocket, Button Flyer With Combination Color</li> <li>• 5 Cm Width Reflective Tape Round Sleeve, Shoulder, &amp; Leg</li> <li>• 4 Flap Pockets on The Jacket &amp; Attached Arm Pocket</li> <li>• Bellow Pocket With Combination Fabric</li> <li>• Roll Up Seam</li> <li>• Cuff With 5.5 cm Combination Fabric Inside</li> </ul>
Pant	<ul style="list-style-type: none"> <li>• 4 Cm Wide Waist Elastic With 4 Eyelet Button &amp; 5 Ribs</li> <li>• 2 Insert Pocket With Horizontal Bartacks</li> <li>• Bellow Pocket With Combination Fabric</li> <li>• Ruler Pocket</li> <li>• 2 Back Pocket With Flap &amp; Combination Fabric</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Welding &amp; Gridding Works</li> </ul>
Weight / Carton	22.64 kgs
Carton Dimension	61.50 x 41.50 x 32.00 cms
CBM / Carton	0.09
Packing / Carton	20 Pieces
Origin	China






## Best PS

### 210gsm 100% Premium Cotton Pant&Shirt


Standard	CE Cat. I
Fabric Weight	210gsm
Material	100% Premium Cotton
Colour	Petrol Blue, Navy Blue, Khaki Orange, Grey, Red
Features	<ul style="list-style-type: none"> <li>• Mercerized, Sanforized &amp; Pre-Shrunk</li> <li>• Elasticated Waistband at the Back for Comfort Fit</li> <li>• Two Chest Pockets</li> <li>• One Back Pocket</li> <li>• Two Swing Pockets</li> <li>• One Tool Pocket</li> <li>• Size: S-4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/Forklift Operators</li> <li>• Heavy Equipment Operations</li> </ul>
Size	S – 5XL
Weight / Carton	22.00 kgs
Carton Dimension	51 x 39 x 36 cms
CBM / Carton	0.072
Packing / Carton	1Pc/Polybag, 30Pcs/Carton
Origin	China



## Best CV

### 210gsm 100% Premium Cotton Coverall

Standard	CE Cat. I
Fabric Weight	210gsm
Material	100% Premium Cotton
Colour	Petrol Blue, Navy Blue Khaki, Grey, Red
Features	<ul style="list-style-type: none"> <li>• Mercerized, Sanforized &amp; Pre-Shrunk</li> <li>• Elasticated Waistband at the Back for Comfort Fit</li> <li>• Two Chest Pockets</li> <li>• One Back Pocket</li> <li>• Two Swing Pockets</li> <li>• One Tool Pocket</li> <li>• Size: S-4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/Forklift Operators</li> <li>• Heavy Equipment Operations</li> </ul>
Size	S – 5XL.
Weight / Carton	20.00 kgs
Carton Dimension	51 x 39 x 32 cms
CBM / Carton	0.064
Packing / Carton	1Pc/Polybag, 30Pcs/Carton
Origin	China







## Polycotton Coverall

### 65/35 Polyester/Cotton Coverall

Standard	CE Cat. I
Fabric Weight	155gsm
Material	65/35 Polyester/Cotton
Colour	Petrol Blue, Navy Blue, Khaki Grey, Yellow, Red, Orange
Features	<ul style="list-style-type: none"> <li>• Mercerized, Sanforized &amp; Pre-Shrunk</li> <li>• Elasticated Waistband at the Back for Comfort Fit</li> <li>• Two Chest Pockets</li> <li>• Two Swing Pockets</li> <li>• One Tool Pocket</li> <li>• Size: S-4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Industrial Workshop</li> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Size	S – 5XL
Weight / Carton	14.50 Kgs
Carton Dimension	54 x 39 x 29 cms
CBM / Carton	0.061
Packing / Carton	1Pc/Polybag, 30Pcs/Carton
Origin	China




Petrol Blue Navy Blue Khaki Orange Grey Red Yellow



## Polycotton Pant & Shirt

### 65/35 Polyester/Cotton Pant & Shirt

Standard	CE Cat. I
Fabric Weight	155gsm
Material	65/35 Polyester/Cotton
Colour	Petrol Blue, Navy Blue, Khaki Grey, Red, Orange
Features	<ul style="list-style-type: none"> <li>• Mercerized, Sanforized &amp; Pre-Shrunk</li> <li>• Elasticated Waistband at the Back for Comfort Fit</li> <li>• Two Chest Pockets</li> <li>• Two Swing Pockets</li> <li>• Two Back Pocket</li> <li>• Size: S-4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Industrial Workshop</li> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Size	S – 5XL
Weight / Carton	15.50 Kgs
Carton Dimension	54 x 39 x 30 cms
CBM / Carton	0.063
Packing / Carton	1Pc/Polybag, 30Pcs/Carton
Origin	China




Petrol Blue Navy Blue Khaki Orange Grey Red



## European - PS

100% Cotton European Pant / Shirt	
Standard	CE, CAT I
Fabric Weight	235 GSM
Material	100% Genuine Cotton
Feature	Sanforized & Mercerized
Shirt	<ul style="list-style-type: none"> <li>• European Style Jacket</li> <li>• Collar With Button for Adjustment</li> <li>• One Pockets With Flap &amp; Velcro on the Left Side of Sleeve Cuffs</li> <li>• Front Closure With Zipper &amp; Button</li> <li>• Two Pockets at The Bottom With Flap &amp; Velcro With Contrast Color</li> <li>• Reflective Tape in Each Shoulder, Sleeve &amp; Back</li> </ul>
Pant	<ul style="list-style-type: none"> <li>• Plastic Zipper Closure</li> <li>• Two Lateral Front Pockets</li> <li>• Mobile Phone Pocket With Flap &amp; Velcro on The Left Leg</li> <li>• Two Knee Pockets With Flap &amp; Velcro With Contrast Color</li> <li>• Two Back Pockets With Flap &amp; Velcro With Contrast Color</li> <li>• One Tool Pocket With Flap &amp; Velcro on the Back Right Leg</li> <li>• One Reflective Tape in Each Leg</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Weight / Carton	27 kgs
Carton Dimension	39 x 39 x 32 cms
CBM / Carton	0.05
Packing / Carton	20 Pieces
Origin	China



## European - PS


100% Cotton European Pant / Shirt	
Standard	CE, CAT I
Fabric Weight	235 GSM
Material	100% Genuine Cotton
Feature	Sanforized & Mercerized
Shirt	<ul style="list-style-type: none"> <li>• Full Piece Front Closure With Zipper &amp; Button</li> <li>• Patch Pockets With Zipper &amp; Sides</li> <li>• One Tape on Each Shoulder / Sleeve &amp; Back</li> <li>• One Pen Pocket on the Left Chest Pocket</li> <li>• Two Pockets at The Bottom With Flap &amp; Velcro With Contrast Color</li> <li>• Cuffs With Button</li> </ul>
Pant	<ul style="list-style-type: none"> <li>• Plastic Zipper Closure</li> <li>• Two Layers Insert Pockets</li> <li>• Two Button Pockets With Flap &amp; Velcro Under Contrast Flap &amp; Pocket</li> <li>• Attach Mobile Pocket With Flap</li> <li>• Inner Waist &amp; Loops With Contrast Fabric, Two Sides Elastic</li> <li>• Two Knee Pockets With Flap &amp; Velcro With Contrast Color</li> <li>• Tool Pocket on the Back Right Leg</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Food, Marine, Oil &amp; Gas</li> </ul>
Weight / Carton	22.84 kgs
Carton Dimension	60 x 40 x 35 cms
CBM / Carton	0.09
Packing / Carton	20 Pieces
Origin	China





## European LITE PS

65/35 Polyester/Cotton Pant & Shirt	
Standard	CE Cat. I
Fabric Weight	200 GSM
Material	65/35 Polyester/Cotton
Colour	Navy Blue, Grey
Features	<ul style="list-style-type: none"> <li>• Mercerized, Sanforized &amp; Pre-Shrunk</li> <li>• Double Combination Colored Fabric for Extra Protection &amp; Visibility</li> <li>• Elasticated Waist Band for Comfortable Fit</li> <li>• 2Chest Pocket &amp; 2Wide Pocket on Shirt Front</li> <li>• Pen Pocket on Left Sleeve</li> <li>• 2" Wide Reflective Tape around Arms, Leg, Shoulder</li> <li>• Concealed Zipper with Fabric Flap &amp; Button Closure</li> <li>• 2Swing Pocket, 2Cargo Pocket, 2 Back Pockets with Flap</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites, Food. Marine</li> </ul>
Sizes	S-4XL
Weight / Carton	26.50 kgs
Carton Dimension	60 x 39 x 35 cms
CBM / Carton	0.082
Packing / Carton	1Pc/Polybag, 25Pcs/Carton
Origin	China



## LENZING™ FR/ DS-CABCD

Lenzing™ For Protective Wear	
Standard	NFPA 2112-2018/ UL Certified
Fabric Weight	150 GSM/ 4.5OZ
Material	Lenzing FR™ 49%, M-Aramid 49%, Anti-Static 2%
Colour	Royal Blue
Features	<ul style="list-style-type: none"> <li>• LENZING™ FR Blend Fabrics are inherently FR (Fire Retardant) Fibers: Botanic Origin,</li> <li>• LENZING™ is Derived from Natural Resource Wood Inherently Cellulosic fiber based on Modal Technology</li> <li>• LENZING™ Passes the Comfort Test by Hohenstein Institute</li> <li>• LENZING™ Allows the user to breath &amp; Cool the User.</li> <li>• Enhanced Breathability, Gentle on Skin, Drape, Unfavorable for Bacterial Growth</li> </ul>
Applications	Fire, Oil & Gas, Rigs, Maintenance.
Tapes	2tapes on Each Arm, 2tapes on Each Leg
Sizes	S-4XL
Weight / Carton	19 kgs
Carton Dimension	57 x 40 x 31 cms
CBM / Carton	0.0706
Packing / Carton	1Pc/Polybag, 25Pcs/Carton
Origin	China








## Safeguard PRO

### FR Coverall 260 GSM - European Style


Standard	NFPA 2112: 2012 EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015
Fabric Weight	Heavy Duty 260 GSM
Material	100% Genuine Cotton
Features	<ul style="list-style-type: none"> <li>• Dual Color Hi-viz Fr Reflective Tape</li> <li>• Garment Tested For Heat, Flame &amp; Electrostatic</li> <li>• Sanforized &amp; Mercerized</li> <li>• 2 Front Chest Pockets</li> <li>• 1 Pen Pocket</li> <li>• 2 Swing Pockets on Leg</li> <li>• 2 Back Pockets on Hip</li> <li>• Velcro To Adjust The Sleeves Cuffs</li> <li>• 2 Way HD Metal Zipper With Flap</li> <li>• Elasticated Waist Band for Extra Comfort</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Welding &amp; Allied Processes</li> <li>• Heat &amp; Limited Flame Spread</li> <li>• Electrostatic Properties</li> </ul>
Weight / Carton	26.28 kgs
Carton Dimension	60 X 40 X 34 cms
CBM / Carton	0.082
Packing / Carton	20 Pieces
Origin	China



## Safeguard C

### FR Coverall 320 GSM - European Style

Standard	EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015
Fabric Weight	Heavy Duty 320 GSM
Material	100% Genuine Cotton
Features	<ul style="list-style-type: none"> <li>• Dual Color Hi-viz FR Reflective Tape</li> <li>• Garment Tested for Heat, Flame &amp; Electrostatic</li> <li>• Sanforized &amp; Mercerized</li> <li>• 2 Front Chest Pockets</li> <li>• 1 Pen Pocket</li> <li>• 2 Swing Pockets on Leg</li> <li>• 2 Back Pockets on Hip</li> <li>• Velcro To Adjust The Sleeves Cuffs</li> <li>• Two Way HD Metal Zipper With Flap</li> <li>• Elasticated Waist Band for Extra Comfort</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Welding &amp; Allied Processes</li> <li>• Heat &amp; Limited Flame Spread</li> <li>• Electrostatic Properties</li> </ul>
Weight / Carton	30 kgs
Carton Dimension	63 x 40 x 34 cms
CBM / Carton	0.09
Packing / Carton	20 Pieces
Origin	China





## Spartan I

### Cargo Pants, 65/35 Polyester/Cotton Fabric

Standard	CAT I
Fabric Weight	235 GSM
Material	65/35 Polyester/Cotton Fabric
Features	<ul style="list-style-type: none"> <li>• Abrasion Resistant Anti-wear With Knee Pad Insert</li> <li>• Knee Area Designed For Extra Comfort &amp; Durability</li> <li>• Tool Hammer &amp; Ruler Loops</li> <li>• Two Tone Double Reinforced Side Pocket on Left Leg</li> <li>• Triple Pocket With Key-chain Holder on the Right Leg</li> <li>• Dual Contrast Bar Tacks</li> <li>• Large Belt Loop With Waist Band</li> <li>• Extra Long Open Pocket for Tools</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Warehousing</li> <li>• Manufacturing</li> <li>• Airports</li> <li>• Shipping &amp; Marine Industry</li> </ul>
Weight / Carton	18 kgs
Carton Dimension	51 x 39 x 35 cms
CBM / Carton	0.0617
Packing / Carton	30 Pieces
Origin	China



Royal Blue



Grey



Khaki



## Spartan II

### Cargo Pants, 100% Cotton Canvas

Standard	CAT I
Fabric Weight	240 GSM
Material	100% cotton canvas fabric
Features	<ul style="list-style-type: none"> <li>• Abrasion Resistant Anti-wear with Knee Pad Insert</li> <li>• Double Reinforced Side Pocket On The Right Leg With Velcro &amp; Flap Plus Ruler, Hammer &amp; Tools Loop</li> <li>• Side Pocket On The Left Leg With Velcro &amp; Flap + Pen &amp; Mobile Pocket</li> <li>• Large Belt Loop With Waist Band</li> <li>• Dual Contrast Bartacks</li> <li>• Elastic Two Sides &amp; 7 Loops Waist</li> <li>• Oxford Fabric Combination Under</li> <li>• Waist Belt, Bottom of Back Pocket</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Warehousing</li> <li>• Manufacturing</li> <li>• Airports</li> <li>• Shipping &amp; Marine Industry</li> </ul>
Weight / Carton	18 kgs
Carton Dimension	51 x 39 x 35 cms
CBM / Carton	0.0617
Packing / Carton	30 Pieces
Origin	China



Navy Blue



Grey



Khaki





## Spartan IV

### 210gsm 80/20 Polyester/Cotton Cargo Pants

Standard	CE Cat. I
Fabric Weight	210 GSM
Colour	Navy Blue, Khaki
Material	80/20 Polyester/Cotton
Features	<ul style="list-style-type: none"> <li>• Two Insert Pocket</li> <li>• Two Cargo Pockets with Flap &amp; Velcro Closure</li> <li>• Two Back Pocket with Flap &amp; Velcro</li> <li>• Double Stitched on All Seams for Extra Protection</li> <li>• Size: S-4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Mechanical Workshop</li> <li>• Construction Sites</li> <li>• Crane/Forklift Operators</li> <li>• Heavy Equipment Operations</li> <li>• Cargo, Warehouse &amp; Logistics.</li> </ul>
Weight / Carton	18.00 kgs
Carton Dimension	58 x 40 x 23 cms
CBM / Carton	0.05336
Packing / Carton	1Pc/Polybag, 25Pcs/Carton
Origin	China



## Dual Tone Workshirt

### Dual Tone, Work Shirt, 100% Cotton

Standard	CE Cat. I
Fabric Weight	150 GSM
Colour	Orange/Navy, Yellow/Navy
Material	100 % Cotton
Features	<ul style="list-style-type: none"> <li>• Vented Long Sleeve Reflective Work Shirt</li> <li>• Twin Chest Pockets with Flap &amp; Button Closure</li> <li>• Venting At Back Yoke With Mesh</li> <li>• Underarm Mesh Gusset</li> <li>• Double Fold Front Pocket with Button Closure</li> <li>• Reflective Tape</li> </ul>
Tapes	2Horizontal, 1 on Each Sleeve.
Applications	<ul style="list-style-type: none"> <li>• Construction, Baggage Handling</li> <li>• Security, Survey, Landscaping</li> <li>• Paving, Railroad, Sanitation</li> </ul>
Weight / Carton	11.25 kgs
Carton Dimension	54 x 31 x 25 cms
CBM / Carton	0.04185
Packing / Carton	1Pc/Polybag, 25Pcs/Carton
Origin	China



## Technician Vest

### Technician Vest Polyester/Cotton

Standard	CE Cat. I
Fabric Weight	200gsm
Colour	Khaki
Material	80/20 Polyester/ Cotton
Features	<ul style="list-style-type: none"> <li>• 2 Chest Pockets With Flap &amp; Button Closure</li> <li>• 2 Down Pockets with Zipper Closure</li> <li>• Another Pocket With Flap &amp; Button Closure Above the Left Down Pocket</li> <li>• 2 Small Pockets With Flap &amp; Velcro Closure Above Right</li> <li>• 1 Big Pocket At The Back</li> <li>• Size: S To 4XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Technicians, Mechanics,</li> <li>• Electrician, Repair &amp; Maintenance.</li> </ul>
Weight / Carton	9.50 kgs
Packing / Carton	1Pc/Polybag, 30Pcs/Carton
Origin	China





## Labcoat

PP Non-Woven Lab Coat	
Standard	EN CATI
Fabric Weight	30 GSM
Material	PP Non-Woven
Style	Classic Style With Collar
Size	110 cm x 140 cm
Color	White
Features	<ul style="list-style-type: none"> <li>• 4 Buttons Without Pocket &amp; Open Cuffs</li> <li>• PP Non-woven to Protect From Fluids Nontoxic &amp; Do Not Cause Irritation on Skin</li> <li>• Light Weight</li> <li>• Comfortable to Wear</li> <li>• Breathable</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Laboratory</li> <li>• Schools</li> <li>• Dental</li> <li>• Hospitals</li> </ul>
Weight / Carton	4.26 kgs
Carton Dimension	49 x 32 x 33.50 cms
CBM / Carton	0.0525
Packing / Carton	50 Pieces
Origin	China



## Disposable Coverall

Non-Woven Breathable Polypropylene	
Standard	EN CATI
Fabric Weight	40 GSM - White 50 GSM - White
Material	PP Non-Woven
Style	Disposable Coverall With Elastic Hood & Wrist
Features	<ul style="list-style-type: none"> <li>• Soft &amp; Light Weight</li> <li>• Full Body Coverage With Protection From Dust, Grinding Paint, Liquid, Light Chemical</li> <li>• Elasticated Cuff, Ankles, Waist Design, Zipper With Front Closure Flap, Serged Seams &amp; Attached Hood</li> <li>• Excellent Quality, Durable &amp; Long-lasting Protection</li> </ul>
Sizes	M - 3XL
Applications	<ul style="list-style-type: none"> <li>• Spray Painting, Manufacturing</li> <li>• Food Services, Medical, clean Room</li> <li>• Industrial &amp; Pharmaceutical Processing</li> <li>• Asbestos Inspection, Insulation Laying</li> <li>• Vehicle &amp; Machine Maintenance</li> </ul>
Weight / Carton	5.52 kgs
Carton Dimension	49 x 34 x 27 cms
CBM / Carton	0.0475
Packing / Carton	50 Pieces
Origin	China





## Proguard Type 5/6

### Proguard Type 5/6 SMS Coverall

Standard	EN13982-1(&2):2004(Type 5) EN13034:2005:A1:2009(Type 6) EN1073-2:2002
Fabric Weight	55 GSM
Color	White
Features	<ul style="list-style-type: none"> <li>• Water Prof Fabric</li> <li>• Light Base Chemicals Resistant</li> <li>• Coverall With Elastic Hood, Waist, Ankle</li> <li>• Protection Against Hazardous Substances &amp; Contamination of Both Products &amp; Personnel</li> <li>• Zipper Front With Storm Flap</li> <li>• 3 Thread Stitching</li> <li>• Serged Seam</li> </ul>
Sizes	M - 3XL
Applications	<ul style="list-style-type: none"> <li>• Chemical Industry</li> <li>• Pharmaceutical Industry</li> <li>• Petroleum &amp; Crude Oil Environments</li> <li>• Tank Cleaning, Inspection &amp; Maintenance</li> <li>• Agrochemicals Handling</li> <li>• Decommission of Production Plants</li> <li>• Disposal of Hazardous Materials</li> </ul>
Weight / Carton	10.80 kgs
Carton Dimension	21.50 x 14.50 x 19 cms
CBM / Carton	0.006
Packing / Carton	50 Pieces
Origin	China



## Proguard Type 4/5/6

### Proguard Type 4/5/6 Microporous Coverall

Standard	Type 4 EN14605:2005+A1:2009 Type 5 EN13982-1(&2):2004/A1:2010 Type 6 EN13034:2005:A1:2009 EN14126:2003 EN1073-2:2002 EN1149-5:2008 With EN1149-1:2006
Fabric Weight	63 GSM
Features	<ul style="list-style-type: none"> <li>• Waterproof</li> <li>• Chemical Splashes Resistant</li> <li>• Fabric Design As Barrier to Infective Agents &amp; Radio Active Particulates</li> <li>• Anti Static Properties</li> <li>• Coverall With Taped Seam, Hood, Elastic Wrist/waist/ankle</li> <li>• Zipper Front With Storm Flap</li> <li>• 3 Thread Stitching</li> <li>• Serged Seam</li> </ul>
Sizes	M - 3XL
Applications	<ul style="list-style-type: none"> <li>• Chemical Industry</li> <li>• Pharmaceutical Industry</li> <li>• Petroleum &amp; Crude Oil Environments</li> <li>• Tank Cleaning, Inspection &amp; Maintenance</li> <li>• Agrochemicals Handling</li> <li>• Decommission of Production Plants</li> <li>• Disposal of Hazardous Materials</li> </ul>
Weight / Carton	13.5 kgs
Carton Dimension	21.5 x 14.5 x 19 cms
CBM / Carton	0.006
Packing / Carton	50 Pieces
Origin	China



## Antistatic Coverall

Anti-Static Coveralls (Clean XS)	
Standard	EN 1149-5, EN 1149-3
Fabric Weight	65 GSM
Colour	White with Grey Blocks
Material	98% Polyester, 2% Carbon
Features	<ul style="list-style-type: none"> <li>• Conductive Yarn Interval: 10mm</li> <li>• Plastic Zip Front Fastening</li> <li>• Elasticated Cuff,</li> <li>• Back &amp; Bottom</li> </ul>
Tapes	2 Tapes on Each Arm, 2 Tapes on Each Leg
Size	M-3XL
Applications	<ul style="list-style-type: none"> <li>• Automobile Paint Shop</li> <li>• Spare Parts Mechanic</li> <li>• Electronic Equipment MB</li> <li>• Paint Shops</li> <li>• Mobile Assembly</li> </ul>
Weight / Carton	10.30 kgs
Carton Dimension	71.10 x 40.64 x 27.94 cms
CBM / Carton	0.0807
Packing / Carton	1Pc/Polybag, 10Pcs/Carton (3XL Size 5Pcs/Carton)
Origin	Pakistan



## Labcoat 65/35

Lab Coat Poly/Cotton	
Standard	CE Cat. I
Fabric Weight	145 GSM
Colour	White
Material	65/35 Polyester/Cotton
Features	<ul style="list-style-type: none"> <li>• Pockets: 1 breast pocket, 2 lower pockets</li> <li>• Collar: Pointed long collar</li> <li>• Cuff: Loose cuff</li> <li>• 4 plastic button on the front</li> </ul>
Size	L,XL,2XL
Applications	<ul style="list-style-type: none"> <li>• Laboratory</li> <li>• Pharmaceuticals</li> <li>• Cleanroom</li> <li>• Hospitals</li> <li>• Clinics</li> </ul>
Weight / Carton	9.50 kgs
Carton Dimension	51 x 39 x 19 cms
CBM / Carton	0.03779
Packing / Carton	1Pc/Polybag, 25Pcs/Carton
Origin	China







## Polo I

130 GSM with Retro Reflective Tapes	
Standard	CE, CAT I
Fabric Weight	130 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester birdeye fabric
Features	<ul style="list-style-type: none"> <li>• Full Sleeves T-Shirt</li> <li>• Navy Blue Collar &amp; Elasticated Cuffs</li> <li>• 3 Nylon Buttons</li> <li>• Design with a Comfort Fit</li> <li>• Hi-Viz Fabric</li> <li>• One Pocket on Chest Left Side</li> </ul>
Tapes	2 Horizontal, 2 Vertical 2 on each sleeve
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Airports, Maintenance Works</li> <li>• Roads Constructions, Industrial &amp; Factory, Warehouse, Mining</li> <li>• Transportation</li> </ul>
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	0.077
Packing / Carton	50 Pieces
Origin	China



## Polo II

130 GSM with Retro Reflective Tapes	
Standard	CE, CAT I
Fabric Weight	130 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester birdeye fabric
Features	<ul style="list-style-type: none"> <li>• Full Sleeves T-Shirt</li> <li>• Navy Blue Collar &amp; Elasticated Cuffs</li> <li>• 3 Nylon Buttons</li> <li>• Design with a Comfort Fit</li> <li>• Hi-Viz Fabric</li> <li>• One Pocket on Chest Left Side</li> </ul>
Tapes	2 Horizontal, 2 on each sleeve
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Airports, Maintenance Works</li> <li>• Roads Constructions, Industrial &amp; Factory, Warehouse, Mining</li> <li>• Transportation</li> </ul>
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	0.077
Packing / Carton	50 Pieces
Origin	China



## Polo III

150 GSM with Perforated Reflective Tapes	
Standard	CE, CAT I
Fabric Weight	150 GSM
Color	Fluorescent Yellow
Material	55% Cotton / 45% Polyester
Features	<ul style="list-style-type: none"> <li>• Full Sleeves T-Shirt</li> <li>• Lightweight Hi-Viz Fabric</li> <li>• Butter Soft on the Inside</li> <li>• Rib Knit Collar &amp; 3 Buttoned Pocket</li> <li>• Cotton Mixture in Fabric Makes it Suitable to Wear in Hot Temp.</li> </ul>
Tapes	2 Horizontal, 2 Vertical 2 on each sleeve
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Airports, Maintenance Works</li> <li>• Roads Constructions, Industrial &amp; Factory, Warehouse, Mining</li> <li>• Transportation</li> </ul>
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	0.077
Packing / Carton	50 Pieces
Origin	China



## Glow

HD Hi-Vis Breathable Mesh (Net) Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Mesh (Net) Type
Features	<ul style="list-style-type: none"> <li>• 9 Cm (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges</li> <li>• Two Lower Flap Pockets, One Right Side Flap Pocket With Additional Mobile Pocket Over it</li> <li>• On Left Side Open Pocket &amp; Attached on it Pen Pocket</li> <li>• Side Back Ventilation</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Utility Workers, Surveyors</li> <li>• Flaggers, Warehouse</li> </ul>
Weight / Carton	12.90 kgs
Carton Dimension	50 x 45 x 30 cms
CBM / Carton	0.068
Packing / Carton	1Pc/Polybag, 50Pcs/Carton
Origin	China



## MultiGlow

### HD Executive Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow/ Orange
Material	100% Polyester Knit Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm Retro Reflective Tape</li> <li>• Two Lower Flap Pockets with Velcro Enclosure</li> <li>• One ID Pocket on Left Side</li> <li>• One Mobile Pocket with Velcro on Right Side</li> <li>• Fluorescent Orange Cloth Knitted</li> <li>• Piping for Day/night Time Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Emergency Responders</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Flaggers</li> <li>• Warehouse</li> </ul>
Weight / Carton	8.70 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



## 3M MultiGlow

### HD Executive Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow/ Orange
Material	100% Polyester Knit Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm 3M 2925 Retro Reflective Tape with 25 Wash 3M Watermark</li> <li>• Two Lower Flap Pockets with Velcro Enclosure</li> <li>• One ID Pocket on Left Side</li> <li>• One Mobile Pocket with Velcro on Right Side</li> <li>• Fluorescent Orange Cloth Knitted</li> <li>• Piping for Day/night Time Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Utility Workers</li> <li>• Surveyors, Flaggers</li> <li>• Emergency Responders</li> <li>• Warehouse</li> </ul>
Weight / Carton	9.50 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



## 3M Radiant

### HD Executive Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm 3M 2925 Retro Reflective Tape with 25 Wash 3M Watermark</li> <li>• HD Nylon Zipper Closure in Back</li> <li>• Black Knitted Piping for Daytime Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Emergency Responders</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Flaggers</li> <li>• Warehouse</li> </ul>
Weight / Carton	14.90 kgs
Carton Dimension	45 x 25 x 48 cms
CBM / Carton	0.054
Packing / Carton	100 Pieces
Origin	China



## Dazzle

### HD Executive Combination Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Red/Navy Blue Yellow/Navy Blue
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm Retro Reflective Tape</li> <li>• Two Lower Flap Pockets with Combination Fabric, Having Flap &amp; Velcro Enclosure</li> <li>• One ID Pocket on Left Side</li> <li>• Mobile Pocket with Velcro on Right Side</li> <li>• Black knitted Piping for Daytime Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Utility Workers</li> <li>• Surveyors, Flaggers</li> <li>• Emergency Responders</li> <li>• Warehouse</li> </ul>
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



## Twinkle

### Executive Back Ventilation & Fabric Type

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 9 cm (3.5 Inches) Retro Reflective Tape with Double Side Fluorescent Edges</li> <li>• Lower Two Flap Pockets with Velcro Enclosures Having Side Buckets</li> <li>• One Right Side &amp; One Left Pocket Side Flap Pocket Along with Pen Pocket, Knitted Piping of Contrasting Color for Hi-Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Utility Workers, Surveyors</li> </ul>
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



## Sparkle

### Executive Back Ventilation & Fabric Type

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 9 cm (3.5 Inches) Retro Reflective Tape with Double Side Fluorescent Edges</li> <li>• Lower Two Flap Pockets with Velcro Enclosures</li> <li>• One Left Side 4 Pens Pocket &amp; One Right Side Mobile with Pen Pocket, Same Fabric Color Nylon Zipper Closure Knitted Cloth</li> <li>• Piping of Contrasting Color in Each Model for Hi-Visibility</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Utility Workers, Surveyors</li> <li>• Flaggers, Warehouse</li> </ul>
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 34 cms
CBM / Carton	0.038
Packing / Carton	50 Pieces
Origin	China



## Bright

### HD Managerial Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• Two Horizontal, Two Front Vertical Reflective Tapes</li> <li>• Lower Two Flap Pockets with Velcro Enclosures</li> <li>• One Left Side Mobile Pocket &amp; Right Side Flap Pocket</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Flaggers</li> </ul>
Weight / Carton	8.48 kgs
Carton Dimension	45 x 25 x 30 cms
CBM / Carton	0.034
Packing / Carton	50 Pieces
Origin	China



## Bright ID

### Four Pocket Vest + ID Pocket

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow, Orange, Blue, Red, Green
Features	<ul style="list-style-type: none"> <li>• Two Horizontal, Two Front Vertical Type Retro-Reflective Tapes</li> <li>• Lower Two Flap Pockets with Velcro Enclosures</li> <li>• Three Pocket Vest + ID Pocket HD Nylon Zipper Closure in Back</li> </ul>
Material	100% Polyester
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Utility Workers</li> </ul>
Weight / Carton	10.20 kgs
Carton Dimension	45 x 25 x 30 cms
CBM / Carton	0.034
Packing / Carton	1Pc/Polybag, 50Pcs/Carton
Origin	China







## Glitter

### HD Supervisory Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow, Orange Green, Blue, White, Red
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cms Retro Reflective Tape</li> <li>• Velcro Enclosure</li> <li>• Black Net Type Piping</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Emergency Responders</li> <li>• Flaggers</li> </ul>
Weight / Carton	12.13 kgs
Carton Dimension	45 x 25 x 42 cms
CBM / Carton	0.047
Packing / Carton	100 Pieces
Origin	China



## Glitter ID

### Fabric Vest + ID Pocket

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Features	<ul style="list-style-type: none"> <li>• ID Pocket</li> <li>• 5 cms Retro-Reflective Tapes</li> <li>• Velcro Enclosures</li> <li>• Black Net Type piping</li> </ul>
Material	100% Polyester
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction Workers</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Emergency Responders</li> <li>• Flaggers</li> </ul>
Weight / Carton	10.20 kgs
Carton Dimension	45 x 25 x 42 cms
CBM / Carton	0.047
Packing / Carton	1Pc/Polybag, 100Pcs/Carton
Origin	China



## Flare

### Hi-Vis Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	<ul style="list-style-type: none"> <li>• PVC Tape Crush Type Hi-Vis Reflective for Day &amp; Night</li> <li>• Piping Same as Fabric Color</li> <li>• 2 Vertical, 2 Horizontal Hi-Vis</li> <li>• Tapes Velcro Enclosure</li> <li>• Provides Enhance Visibility During Inclement Weather</li> </ul>
Size	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction Workers</li> <li>• Utility Workers, Surveyors</li> <li>• Emergency Responders</li> </ul>
Weight / Carton	13.70 kgs
Carton Dimension	45 x 25 x 48 cms
CBM / Carton	0.054
Packing / Carton	100 Pieces
Origin	China



## Glitz

### Hi-Viz Mesh (Net) Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	110 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	<ul style="list-style-type: none"> <li>• 2-inch Retro Reflective Tape</li> <li>• Piping In Contrast</li> <li>• HD Nylon Zipper Closure</li> <li>• 2 Vertical, 2 Horizontal Hi-vis Tapes</li> <li>• Contrasting Trim Piping/borders</li> <li>• Maximizes Daytime Visibility</li> <li>• Generous Fit for Wearer Comfort</li> </ul>
Size	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction Workers</li> <li>• Utility Workers, Surveyors</li> <li>• Emergency Responders</li> </ul>
Weight / Carton	12 kgs
Carton Dimension	45 x 25 x 50 cms
CBM / Carton	0.056
Packing / Carton	100 Pieces
Origin	China



## Star

### HD Supervisory Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	110 GSM
Color	Fluorescent Yellow / Orange
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm Retro Reflective Tape</li> <li>• Velcro Enclosure</li> <li>• Back Net Type Piping</li> </ul>
Sizes	S - 4XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction</li> <li>• Utility Workers</li> <li>• Surveyors</li> <li>• Emergency Responders</li> <li>• Flaggers</li> </ul>
Weight / Carton	11.73 kgs
Carton Dimension	45 x 25 x 50 cms
CBM / Carton	0.047
Packing / Carton	100 Pieces
Origin	China



## Shine

### Lightweight Hi-Vis Fabric type vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	60 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	<ul style="list-style-type: none"> <li>• 2-inch Retro Reflective Tape</li> <li>• Piping In Contrast</li> <li>• HD Nylon Zipper Closure</li> <li>• 2 Vertical, 2 Horizontal Hi-vis Tapes</li> <li>• Contrasting Trim Piping/borders</li> <li>• Maximizes Daytime Visibility</li> <li>• Generous Fit for Wearer Comfort</li> </ul>
Size	2XL
Applications	<ul style="list-style-type: none"> <li>• Shopping Cart Retrievers</li> <li>• Warehouse Workers</li> <li>• Delivery Truck Drivers</li> <li>• Roadway Construction Workers</li> <li>• Utility Workers, Surveyors</li> <li>• Emergency Responders</li> </ul>
Weight / Carton	9 kgs
Carton Dimension	45 x 25 x 36 cms
CBM / Carton	0.04
Packing / Carton	100 Pieces
Origin	China



## Lumina Black

### HD Executive Combination Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Yellow/ Black
Material	100% Polyester Fabric Type
Features	<ul style="list-style-type: none"> <li>• 5 cm Retro Reflective Tape</li> <li>• Two Lower Flap Pockets with Combination Fabric, Having Flap &amp; Velcro Enclosure</li> <li>• One Mobile Pocket with Velcro on Right Side</li> <li>• Black knitted Piping for Daytime Visibility</li> </ul>
Sizes	S to 5XL
Applications	<ul style="list-style-type: none"> <li>• Utility Workers</li> <li>• Surveyors, Flaggers</li> <li>• Emergency Responders</li> <li>• Warehouse</li> </ul>
Weight / Carton	10.70 kgs
Carton Dimension	44 x 26 x 43 cms
CBM / Carton	0.049
Packing / Carton	50 Pieces
Origin	China



## Reflective Belt

### Hi Viz Adjustable Belt for Safety

Standard	CE Cat. I
Material	Polyester Oxford Cloth
Colour	Fluorescent Yellow, Orange
Features	<ul style="list-style-type: none"> <li>• Elastic &amp; Adjustable: Shoulder to Waist 13" to 21", Waist: 27" to 40"</li> <li>• High Visibility &amp; Safety: Safety in all Weather Conditions</li> <li>• Good Quality &amp; Durable</li> <li>• Comfortable: Unlike vest, the straps are more comfortable</li> <li>• Perfect Fit: Adjustable to fit all sizes perfectly</li> <li>• Size: Free Size, Waist Size is Adjustable</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Can be used as Running Vest,</li> <li>• Cycling Vest, Walking Vest,</li> <li>• Safety Vest, Bike Vest</li> </ul>
Weight / Carton	10.20 kgs
Carton Dimension	45 x 26 x 30 cms
CBM / Carton	0.0351
Packing / Carton	1Pc/Polybag, 100Pcs/Carton
Origin	China



## Arctic

Parka Jacket, Retroreflective Tape	
Standard	EN 343
Fabric Weight	210gsm
Colour	Yellow, Fluorescent Orange
Material	300D Oxford/210T Lining/160g Filling.
Features	<ul style="list-style-type: none"> <li>• Polyester Hi-Viz Retroreflective Tape, 380CD/LX/M2</li> <li>• Black Elastic Cuff</li> <li>• 8# Black Two Way Separating</li> <li>• Resin Zipper</li> <li>• Plastic Button</li> <li>• Insulation to Trap Hot Air From</li> <li>• Releasing to Increase Warmth</li> <li>• Size: M-3XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Refrigerated Warehouses</li> <li>• Frozen Food Processing</li> <li>• General Maintenance</li> <li>• Material Handling</li> </ul>
Weight / Carton	12.40 kgs
Carton Dimension	60 x 40 x 38 cms
CBM / Carton	0.0912
Packing / Carton	1Pc/Polybag, 10pcs/Carton
Origin	China



## Bulldozer Fireman Suit

Heavy Duty Fire Fighting Suit	
Standard	EN ISO 11612 EN 14116 EN 61482-1-2 CAT II
Fabric Weight	260 GSM
Material	100% Cotton Fire Retardant Pyrovatex
Features	<ul style="list-style-type: none"> <li>• Built of Three Layers - The Outer Layer</li> <li>• Detachable Thermo Isolating Lining</li> <li>• High Up Collar for Extra Protection</li> <li>• Cuff HD Velcro Closure</li> <li>• Special Reflective Liner on Sleeves</li> <li>• Back &amp; Bottom</li> <li>• Pocket for Detectors, Torches</li> <li>• Protection for Knees</li> </ul>
Color	Navy Blue
Applications	<ul style="list-style-type: none"> <li>• Protects From Flash Fire</li> <li>• Welding</li> <li>• Electric Arc Protection</li> <li>• Protection From Heat &amp; Flame</li> <li>• Protection From Molten Metal Splash</li> </ul>
Weight / Carton	20 kgs
Carton Dimension	60 x 40 x 50 cms
CBM / Carton	0.12
Packing / Carton	5 Pieces
Origin	United Kingdom



## HDPE Apron

Disposable HDPE Apron, 10g, Transparent	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Light Weight</li> <li>• Durable</li> <li>• Resist Tearing</li> <li>• Latex Free</li> <li>• Offers Effective General-purpose</li> <li>• Barrier Protection</li> <li>• Ideal for Food Processing Task</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Food Processing</li> <li>• Beauty</li> <li>• Manufacturing</li> <li>• Construction</li> <li>• Hygienic</li> <li>• Daily Use</li> </ul>
Weight / Carton	6.40 Kgs
Carton Dimension	37 x 30 x 18 cms
CBM / Carton	0.02
Packing / Carton	100 pieces/Bag & 10 bag/Carton
Origin	China





## Torch Jacket

Welding Jacket, Crust Leather	
Standard	CE, Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Natural Split Leather</li> <li>• Button Closing</li> <li>• To Wear over Clothing</li> <li>• Full Leather Collar</li> <li>• Size: M, L, XL</li> <li>• Two Large Front Pockets</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting, Welding</li> <li>• Short Contact With Flames</li> <li>• Protection From Radiant Heat</li> </ul>
Weight / Carton	14.90 kgs
Carton Dimension	42 x 31 x 40 cms
CBM / Carton	0.0520
Packing / Carton	10 Pieces
Origin	Pakistan



## Torch Apron One & Two Piece

Leather Welding Apron	
Standard	CE CAT 1, EN 388
Material	Leather
Length	36 Inches
Width	24 Inches
Features	<ul style="list-style-type: none"> <li>• Natural Split Leather</li> <li>• Cloth Fastening with Hook</li> <li>• To Wear over Clothing</li> <li>• Size: 24 x 36 Inches</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten</li> <li>• Splash</li> </ul>
Weight / Carton	23.85 kgs
Carton Dimension	70 x 35 x 30 cms
CBM / Carton	0.074
Packing / Carton	50 Pieces
Origin	Pakistan



## Torch Sleeves

Leather Welding Sleeves	
Standard	CE CAT 1, EN 388
Material	Leather
Length	22 Inches
Features	<ul style="list-style-type: none"> <li>• Natural Split Leather</li> <li>• Cloth Fastening with Hook</li> <li>• To Wear over Clothing</li> <li>• Size: 22 Inches</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten</li> <li>• Splash</li> </ul>
Weight / Carton	21.67 kgs
Carton Dimension	60 x 38 x 30 cms
CBM / Carton	0.0648
Packing / Carton	50 Pairs
Origin	Pakistan



## Torch Cover

Leather Welding Shoe Cover	
Standard	CE CAT 1, EN 388
Material	Leather
Features	<ul style="list-style-type: none"> <li>• Natural Split Leather</li> <li>• Cloth Fastening with Hook</li> <li>• To Wear over Clothing</li> <li>• Size: 12 Inches</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten</li> <li>• Splash</li> </ul>
Weight / Carton	21.67 kgs
Carton Dimension	60 x 38 x 30 cms
CBM / Carton	0.0648
Packing / Carton	50 Pairs
Origin	Pakistan



## Golden Jacket

### Welding Jacket, Golden Suede Leather

Standard	CE, Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Suede Leather</li> <li>• Button Closing</li> <li>• To Wear over Clothing</li> <li>• Full Leather Collar</li> <li>• Size: M, L, XL</li> <li>• Two Large Front Pockets</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Pockets	1 Front outer and 1 Front inner
Applications	<ul style="list-style-type: none"> <li>• Cutting, Welding</li> <li>• Short Contact With Flames</li> <li>• Protection From Radiant Heat</li> </ul>
Weight / Carton	20.14 kgs
Carton Dimension	41 x 32 x 40 cms
CBM / Carton	0.0524
Packing / Carton	10 Pieces
Origin	Pakistan



## Golden Apron

### Welding Apron, Golden Suede Leather

Standard	CE, Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Sued Leather</li> <li>• Nylon Fastening with Hook</li> <li>• To Wear over Clothing</li> <li>• Two Pockets on Front</li> <li>• Size: 12 x 36 Inches</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten</li> <li>• Splash</li> </ul>
Weight / Carton	35.85 kgs
Carton Dimension	38 x 35 x 66 cms
CBM / Carton	0.0877
Packing / Carton	50 Pieces
Origin	Pakistan



## Golden Sleeve

### Welding Sleeve, Golden Suede Leather

Standard	CE, Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Suede Leather</li> <li>• Nylon Fastening With Hook</li> <li>• To Wear Over Clothing</li> <li>• Size: 22inches (One Size Fits All)</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten Splash</li> <li>• Short Contact With Flames</li> <li>• Protection From Radiant Heat</li> </ul>
Weight / Carton	27.90 kgs
Carton Dimension	62 x 37 x 30 cms
CBM / Carton	0.0688
Packing / Carton	50 Pairs
Origin	Pakistan



## Golden Shoe Cover

### Welding Shoe Cover, Golden Suede Leather

Standard	CE, Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Suede Leather</li> <li>• Velcro Fastening</li> <li>• To Wear Over Clothing</li> <li>• Size: 12inches (One Size Fits All)</li> <li>• Excellent Leather Thickness</li> <li>• Protection Against Small Droplets of Molten Metals.</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cutting</li> <li>• Welding</li> <li>• Small Particles of Molten Splash</li> <li>• Short Contact With Flames</li> <li>• Protection From Radiant Heat</li> </ul>
Weight / Carton	20.14 kgs
Carton Dimension	36 x 40 x 39 cms
CBM / Carton	0.0561
Packing / Carton	50 Pairs
Origin	Pakistan



## Polar Jacket

### Cold Storage (Freezer) Jacket with 3M™ Thinsulate™ Insulation

Standard	3M™ Thinsulate™ Insulation Type G Thermal Resistance: (Rcf) ASTM F 1868
Specification	<ul style="list-style-type: none"> <li>Material: Oxford Polyester</li> <li>Insulation: 3M™ Thinsulate™ Insulation</li> <li>Type G, 120g/m2</li> <li>Coating: Taffeta</li> <li>Colour: Navy Blue</li> <li>Size: M to 3XL</li> </ul>
Features	<ul style="list-style-type: none"> <li>3M™ Thinsulate Insulation Layer for Maximum Warmth</li> <li>120g/m2 Insulation Thickness Offers Protection upto -20 Degree Celsius</li> <li>Ultra-Light Weight Cold Storage Jacket to Ensure Maximum Comfort to Workers</li> <li>3 Layer with 3M Layer Inside</li> <li>Cold Storage Jacket with Hood</li> <li>Flexible Nylon Outer to Allow Unrestricted Movement &amp; Maximum Comfort</li> <li>Closed Cuffs in Arms</li> <li>Hypoallergenic</li> </ul>
Applications	Refrigerated Warehouses, Frozen Food Processing General Maintenance in Cold Weather, Material Handling
Weight / Carton	12 kgs
Packing / Carton	10 Pieces
Origin	China



## Polar Trouser

### Cold Storage (Freezer) Trouser with 3M™ Thinsulate™ Insulation

Standard	3M™ Thinsulate™ Insulation Type G Thermal resistance: (Rcf) ASTM F 1868
Specification	<ul style="list-style-type: none"> <li>Material: Oxford Polyester</li> <li>Insulation: 3M™ Thinsulate™ Insulation</li> <li>Type G, 120g/m2</li> <li>Coating: Taffeta</li> <li>Colour: Navy Blue</li> <li>Size: M to 3XL</li> </ul>
Features	<ul style="list-style-type: none"> <li>3M™ Thinsulate Insulation Layer for Maximum Warmth</li> <li>120g/m2 Insulation Thickness Offers Protection upto -20 Degree Celsius</li> <li>Ultra-Light Weight Cold Storage Jacket to Ensure Maximum Comfort to Workers</li> <li>3 Layer with 3M Layer Inside</li> <li>Cold Storage Trouser with Pockets</li> <li>Flexible Nylon Outer to Allow Unrestricted Movement &amp; Maximum Comfort</li> <li>Hypoallergenic</li> </ul>
Applications	Refrigerated Warehouses Frozen Food Processing General Maintenance In Cold Weather, Material Handling
Weight / Carton	12 kgs
Packing / Carton	10 Pieces
Origin	China





## Rain Coat

PVC/Polyester Rain Coat	
Standard	CE Cat. I
Fabric Weight	170T
Colour	Yellow
Material	Heavy Duty PVC Reinforced on Polyester, 170T
Features	<ul style="list-style-type: none"> <li>• 100% Water Proof</li> <li>• Heat Sealed Seams</li> <li>• Non-Conductive</li> <li>• Durable. High Visibility</li> <li>• Vented Back for Breathability</li> <li>• Integrated Hood</li> <li>• Two Front Pocket</li> <li>• Button with Storm Flap, Zipper for Additional Protection</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction, Forestry, Mining</li> <li>• Logistics, Sanitation Worker</li> <li>• Survey Crews</li> </ul>
Sizes	S-4XL
Weight / Carton	16.50 kgs
Carton Dimension	46 x 32 x 25 cms
CBM / Carton	0.0037
Packing / Carton	1Pc/Fabric Bag, 25Pcs/Carton
Origin	China



## Rain Suit

PVC/Polyester Rain Suit	
Standard	CE Cat. I
Fabric Weight	170T
Colour	Yellow
Material	Heavy Duty PVC Reinforced on Polyester, 170T
Features	<ul style="list-style-type: none"> <li>• 100% Water Proof</li> <li>• Heat Sealed Seams</li> <li>• Non-Conductive</li> <li>• Durable. High Visibility</li> <li>• Vented Back for Breathability</li> <li>• Integrated Hood</li> <li>• Two Front Pocket</li> <li>• Button with Storm Flap, Zipper for Additional Protection</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction, Forestry, Mining</li> <li>• Logistics, Sanitation Worker</li> <li>• Survey Crews</li> </ul>
Sizes	S-4XL
Weight / Carton	16.50 kgs
Carton Dimension	46 x 32 x 28 cms
CBM / Carton	0.0041
Packing / Carton	1Pc/Fabric Bag, 20Pcs/Carton
Origin	China





## CHEM+FR Pant & Shirt

### Chemical Resistance & Flame Resistance

Standard	CE Cat. I
Fabric Weight	0.45mm/400g/sqm)
Colour	Green
Material	3 Layer, Double Side High Strength PVC Coated Nylon Fabric
Features	<ul style="list-style-type: none"> <li>• Chemical Resistance with Limited Flammability</li> <li>• 30" White Plastic Zipper with Double Storm Flap</li> <li>• Front with 4 Plastic Snap Button Closure</li> <li>• Elastic Cuff on Wrist &amp; Legs</li> <li>• Strong Ultrasonic Welded Seams</li> <li>• Good Mechanical Resistance &amp; Durability</li> <li>• Protection: Type 4</li> </ul>
Size	S to 4XL
Applications	Chemical Industry, Utilities
Weight / Carton	18.00 kgs
Carton Dimension	48 x 35 x 27 cms
CBM / Carton	0.0045
Packing / Carton	1Pc/Polybag, 10Pcs/Carton
Origin	China



## CHEM+FR Coverall

### Chemical Resistance & Flame Resistance

Standard	CE Cat. I
Fabric Weight	0.45mm/400g/sqm)
Colour	Green
Material	3 Layer, Double Side High Strength PVC Coated Nylon Fabric
Features	<ul style="list-style-type: none"> <li>• Chemical Resistance with Limited Flammability</li> <li>• 30" White Plastic Zipper with Double Storm Flap</li> <li>• Front with 4 Plastic Snap Button Closure</li> <li>• Elastic Cuff on Wrist &amp; Legs</li> <li>• Strong Ultrasonic Welded Seams</li> <li>• Good Mechanical Resistance &amp; Durability</li> <li>• Protection: Type 4</li> </ul>
Size	S to 4XL
Applications	Chemical Industry, Utilities
Weight / Carton	18.00 kgs
Carton Dimension	48 x 35 x 27 cms
CBM / Carton	0.0045
Packing / Carton	1Pc/Polybag, 10Pcs/Carton
Origin	China




Gradation	Gas welding and brazing	Cutting OXYGEN
4	$q \leq 70$	
5	$70 < q \leq 200$	$900 \leq q \leq 2000$
6	$200 < q \leq 800$	$2000 < q \leq 4000$
7	$> 800$	$4000 < q \leq 8000$

(q = acetylene capacity in l/h)      (q = acetylene capacity in l/h)

## HELMETS

EN 397 Industrial protection helmets



### Marketing elements

- a Identification name or brand of the producer
- b Type of helmet (designation of the producer)
- c Year and quarter of production
- d Size or range of sizes (in centimetres)
- e Number of the legislation (EN 397)
- f Abbreviation of the material of the shell (for example, ABS, PC, HDPE etc.)
- g CE marking
- h Additional requirements

## ADDITIONAL REQUIREMENTS

Marking	Description
- 20°C or - 30°C	Collision or impact with falling objects at low temperatures
+ 150°C	Collision or impact with falling objects at low temperatures
440V AC	Electric insulation voltage
LD	Lateral deformation (crushing)
MM	Resistance to splashes of molten metal

EN Electrically insulated helmets for use with low voltage systems.  
Helmets for use with systems with a tension not exceeding 1000V AC or 1500V DC

## HEARING PROTECTORS

EN 352-1	Headphones
EN 352-2	Earplugs
EN 352-3	Headphones fitted on an industrial protection helmet
EN 352-4	Headphones suit specific ambient noise levels
EN 352-5	Headphones with noise reduction active control
EN 352-6	Headphones audio communications capability
EN 352-7	Inserts to attenuate sound to suit specific ambient noise levels

### Noise damping

It is the difference between the intensity of the "Noise" to which the operator is exposed and that actually transmitted to the ear. The damping level is expressed in the following manners:

HML: this indicates the damping level based on the frequency of the noise:

High (H), Medium (M), Low (L) frequency.

The damping values are expressed through a number preceded by a letter of the frequency to which it refers.

SNR: (Simplified Noise Reduction): it expresses the damping level of the protector through a single value.

### PPE and daily exposure level

According to art. 193 D.Lgs 81/08, if the operator is exposed daily to:

- > 80 dBA the employer provides the workers with hearing PPE
- > 85 dBA the employer demands the workers to use hearing PPE

The employer takes into account the attenuation provided by the personal protection devices worn by workers to assess the efficiency of PPE and compliance with maximum values of noise exposure [87 dB(A)]

Workers exposed to levels exceeding 80 dB (A) receive proper training and practical instruction (art. 195).





# FALL PROTECTION

## PERSONAL PROTECTION EQUIPMENT AGAINST FALLS FROM HEIGHTS

- EN 341 Lowering devices
- EN 353-1 Fall protection devices guided including a rigid anchorage line
- EN 353-2 Fall protection devices guided including a flexible anchorage line
- EN 354 Lanyard
- EN 355 Shock absorbers
- EN 360 Retracting fall protection devices
- EN 361 Body harness
- EN 362 Connectors
- EN 363 Fall breaking systems
- EN 364 Test methods
- EN 365 General requirements for operating instructions, maintenance, regular checkups, marking and packaging
- EN 795 Anchorage devices – Requirements and tests
- EN 1496 Rescue lifting devices
- EN 12841 Rope access systems, Rope adjustment devices

## PERSONAL PROTECTION EQUIPMENT FOR WORK POSITIONING

- EN 358 Positioning and restraint belt and positioning lanyard
- EN 813 Belt with leg straps
- EN 567 Mountaineering equipment Rope clamps





## 100141 Vertex Comfy II

### Industrial Full Body Harness for Fall

Standard	CE EN 361:2002, EN 358:2018, EN813:2008, EN 1497:2007, Cat III
Features	<ul style="list-style-type: none"> <li>• Primary Strap Width: 45mm With Min Breaking Strength of 25kN</li> <li>• Special Design &amp; High Resistant Polyethylene Back Plate for Holding D-ring Even After The Fall</li> <li>• Adjustable Dorsal High Strength Forged D-Ring for Fall Arrest</li> <li>• Secondary Strap Width: 45mm</li> <li>• 1 PC Dorsal Attached D-RING for Fall Arrest</li> <li>• 2 Side D-Ring on Waist Belt for Work Positioning Purpose (EN358)</li> <li>• The center D-Ring on the Waist for Sit harness (EN813)</li> <li>• Frontal Chest Attachment D-Ring for Rescue (EN1497)</li> </ul>
Material	High Visibility Webbing
Color	Red/Black/ Blue
Sizes	Universal
Weight / Carton	14.00 kgs
Carton Dimension	55 x 25 x 34 cms
CBM / Carton	0.0468
Packing / Carton	5 Pieces
Origin	China



## JE145002N Vertex Comfy I

### Full Body Harness Against Fall From Height

Standard	CE EN 361:2002 EN 1497:2007 Category III
Features	<ul style="list-style-type: none"> <li>• Primary Strap Width: 45mm With Min Breaking Strength of 25kN</li> <li>• Special Design &amp; High Resistant Polyethylene Back Plate for Holding D-ring Even After The Fall</li> <li>• Adjustable Dorsal High Strength Forged D-Ring for Fall Arrest</li> <li>• Secondary Strap Width: 45mm</li> <li>• 1 PC Dorsal Attached D-RING for Fall Arrest</li> <li>• Frontal Chest attachment D-Ring for Rescue (EN1497)</li> <li>• Quick Release buckle on Chest &amp; Thigh Strap for Easy Handling</li> <li>• Adjustable Chest, Shoulder &amp; Thigh Strap (5 Adjustable Points)</li> <li>• High Visibility Webbing</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	16.00 kgs
Carton Dimension	55 x 25 x 30 cms
CBM / Carton	0.0413
Packing / Carton	10 Pieces
Origin	China



## Vertex/ 100119

### Full Body Harness

Standard	CE EN 361:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Shoulder D-rings/ Side D-rings</li> <li>• Primary Strap Width: 45mm</li> <li>• Secondary Strap Width: 45mm</li> <li>• Loops on Harness For Body Belts</li> <li>• High Visibility Webbing</li> <li>• Lanyard Attached Directly to D-ring or Attachment Element</li> <li>• Snap Fastener on Shoulder</li> <li>• Strap for Retaining Lanyard</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Personal Fall Arrest Restraint</li> <li>• Work Positioning</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	11.8 kgs
Carton Dimension	49 x 26 x 24 cms
CBM / Carton	0.0305
Packing / Carton	10 Pieces
Origin	China



## Vertex Plus/ 100059

### Full Body Harness with Integrated Belt

Standard	CE EN 361:2002, Category III EN 358:2018
Features	<ul style="list-style-type: none"> <li>• Shoulder D-rings/ Side D-rings</li> <li>• Primary Strap Width: 45mm</li> <li>• Secondary Strap Width: 45mm</li> <li>• Loops on Harness For Body Belts</li> <li>• High Visibility Webbing</li> <li>• Lanyard Attached Directly to D-ring or Attachment Element</li> <li>• Snap Fastener on Shoulder</li> <li>• Strap for Retaining Lanyard</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Personal Fall Arrest Restraint</li> <li>• Work Positioning</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	15 kgs
Carton Dimension	40 x 28 x 34 cms
CBM / Carton	0.032448
Packing / Carton	10 Pieces
Origin	China



## Vertex Lite II/ 100058

### Full Body Harness for Climbing

Standard	CE EN 361:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Primary Strap Width: 45mm With Min Breaking Strength of 25kn</li> <li>• Special Design &amp; High Resistant Polyethylene Back Plate for Holding D-ring Even After the Fall</li> <li>• 1 PC Dorsal Attached D-ring for Fall Arrest with Min Breaking Strength of 25kN</li> <li>• 2 Webbing loops on Front Fall Arrest with Min Breaking Strength of 25kN</li> <li>• PE Material Buckle Type Chest Strap</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction &amp; Maintenance</li> <li>• Free Fall Arrest</li> <li>• Elevated Work Plat Form</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	9.00 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	0.0300
Packing / Carton	10 Pieces
Origin	China



## Vertex Lite I/ 100068

### Full Body Harness Against Fall From Height

Standard	CE EN 361:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Shoulder D-rings/ Side D-rings</li> <li>• Primary Strap Width: 45mm With Min Breaking Strength of 25kn</li> <li>• Special Design &amp; High Resistant Polyethylene Back Plate for Holding D-ring Even After the Fall</li> <li>• Secondary Strap Width: 45mm</li> <li>• 1 Pc Dorsal Attached D-ring for Fall Arrest</li> <li>• Plastic Buckle Type Chest Strap</li> <li>• High Visibility Webbing</li> <li>• Adjustable Chest Strap &amp; Thigh Strap (3 Adjustable Points)</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction &amp; Maintenance</li> <li>• Free Fall Arrest</li> <li>• Elevated Work Plat Form</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	9.00 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	0.0300
Packing / Carton	10 Pieces
Origin	China



## Vertex Web Y / 300205

### Webbing Lanyard Y Energy Shock Absorber

Standard	CE EN 355:2002, EN 354: 2010
Features	<ul style="list-style-type: none"> <li>• Standard 1.8m Length (6 ft.) Plus Shock Absorber</li> <li>• High Strength Webbing, 22kN(5000lbs)</li> <li>• Hi Visibility Rope</li> <li>• Two Scaffolding Hooks, 16kN (3600lbs)</li> <li>• One Carabiner Hook</li> <li>• Capacity of 310lbs at Free Fall up to 6 ft.</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Personal Fall Arrest Restraint</li> <li>• Work Positioning</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	17 kgs
Carton Dimension	41 x 26 x 25 cms
CBM / Carton	0.0267
Packing / Carton	10 Pieces
Origin	China



## Vertex Web U / 300225

### Webbing Lanyard Energy Shock Absorber

Standard	CE EN 355:2002, EN 354: 2010
Features	<ul style="list-style-type: none"> <li>• Standard 1.8 Length (6 ft.) Shock Absorber</li> <li>• High Strength Webbing, 22kN (5000 Lbs.)</li> <li>• High Visibility Webbing</li> <li>• One Scaffolding Hook, 16kN (3600 Lbs.)</li> <li>• One Carabiner Hook</li> <li>• Capacity of 310 Lbs. at Tree Fall upto 6 ft.</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Personal Fall Arrest Restraint</li> <li>• Work Positioning</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	21.70 kgs
Carton Dimension	49 x 27 x 25 cms
CBM / Carton	0.0330
Packing / Carton	20 Pieces
Origin	China





## Vertex Rope Y / 300210

### Twin Rope Lanyard Energy Shock Absorber

Standard	CE EN 354: 2010 EN 355:2002
Features	<ul style="list-style-type: none"> <li>Standard 1.8 Length (6 ft.). Shock Absorber</li> <li>High Strength Webbing, 22kN (5000 Lbs.)</li> <li>High Visibility Webbing</li> <li>Two Scaffolding Hook, 16kN (3600 Lbs.)</li> <li>One Carabiner Hook Capacity of 310 Lbs. at Tree Fall upto 6 ft.</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Personal Fall Arrest Restraint</li> <li>Work Positioning</li> <li>Personal Riding</li> <li>Climbing</li> <li>Rescue</li> <li>Construction</li> </ul>
Material	High Visibility Webbing
Color	White / Black
Sizes	Universal
Weight / Carton	20 kgs
Carton Dimension	45 x 27 x 24 cms
CBM / Carton	0.02916
Packing / Carton	10 Pieces
Origin	China



## Vertex Rope U / 321007

### Rope Lanyard U Type

Standard	CE EN 354: 2010
Features	<ul style="list-style-type: none"> <li>Standard 1.8 Metres (6 ft.) without Shock Absorber</li> <li>One Side Karabiner &amp; One Side Scaffolding Hook</li> <li>U-Type Rope Lanyard</li> <li>One Side Easy 308 Karabiner</li> <li>One Side Silver Plated Scaffolding with Easy SH 60 Hook</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Personal Fall Arrest Restraint</li> <li>Work Positioning</li> <li>Personal Riding</li> <li>Climbing</li> <li>Rescue</li> <li>Construction</li> </ul>
Material	High Visibility Webbing
Color	White / Black
Sizes	Universal
Weight / Carton	18.90 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	0.03
Packing / Carton	20 Pieces
Origin	China



## ANSI WEB Y / JE312206N

### Twin Legged Elastic Webbing Lanyard

Standard	CE EN 355:2002, Category III EN 354:2010
Features	<ul style="list-style-type: none"> <li>Energy Absorber Width 45mm</li> <li>Webbing is Stretchable With Width 50mm</li> <li>Length: 1380-1800mm</li> <li>The Maximum Length Once The Energy Absorber Released is 3700mm</li> <li>2pc Forged Steel Scaffolding Hook (EN362 &amp; ANSI)</li> <li>Steel Snap Hook (EN 362 &amp; ANSI)</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Free Fall Arrest</li> <li>Elevated Work Platform</li> <li>Personal Riding</li> <li>Climbing</li> <li>Rescue</li> <li>Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	21.00 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	0.0300
Packing / Carton	8 Pieces
Origin	China



## ANSI WEB U / JE311237N

### Single Elastic Webbing Lanyard

Standard	CE EN 355:2002, Category III EN 354:2010
Features	<ul style="list-style-type: none"> <li>Energy Absorber Width 45mm</li> <li>Webbing is Stretchable With Width 50mm</li> <li>Length: 1380-1800mm</li> <li>The Maximum Length Once The Energy Absorber Released is 3700mm</li> <li>1pc Forged Steel Scaffolding Hook (EN362)</li> <li>Steel Snap Hook (EN 362 &amp; ANSI)</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Free Fall Arrest</li> <li>Elevated Work Platform</li> <li>Personal Riding</li> <li>Climbing</li> <li>Rescue</li> <li>Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	16.00 kgs
Carton Dimension	48 x 25 x 23 cms
CBM / Carton	0.0276
Packing / Carton	10 Pieces
Origin	China



## ELASTIC WEB Y / 300207

Twin Legged Elastic Webbing Lanyard	
Standard	CE EN 355:2002, Category III EN 354:2010
Features	<ul style="list-style-type: none"> <li>• 1pc Carabiner</li> <li>• 1 Energy Absorber</li> <li>• 2 Forged Steel Large Hook</li> <li>• Elastic Webbing Tube 40mm</li> <li>• Length: 1300 – 1800mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	19.00 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	0.0300
Packing / Carton	10 Pieces
Origin	China



## ELASTIC WEB U / 300233

Single Elastic Webbing Lanyard	
Standard	CE EN 355:2002, Category III EN 354:2010
Features	<ul style="list-style-type: none"> <li>• 1pc Carabiner</li> <li>• 1 Energy Absorber</li> <li>• 1 Forged Steel Large Hook</li> <li>• Elastic Webbing Tube 40mm</li> <li>• Length: 1300 – 1800mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	22.00 kgs
Carton Dimension	55 x 26 x 30 cms
CBM / Carton	0.0429
Packing / Carton	20 Pieces
Origin	China



## Kernmantle Rope/ 300321

Adjustable Energy Absorber Lanyard	
Standard	CE EN 355:2002, Category III EN 354:2010
Features	<ul style="list-style-type: none"> <li>• Kernmantle Rope 12mm</li> <li>• 1pc Rope Adjuster, 1pc</li> <li>• Snap Hook</li> <li>• 1 Energy Absorber, 1 Big Hook</li> <li>• Max Length: 1550 – 1980mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rescue</li> <li>• Construction</li> </ul>
Material	High Visibility Webbing
Color	Yellow / Black
Sizes	Universal
Weight / Carton	27.00 kgs
Carton Dimension	55 x 33 x 28 cms
CBM / Carton	0.0508
Packing / Carton	20 Pieces
Origin	China



## Comfort Belt

Comfort Belt/ 100016	
Standard	EN 358:2018
Features	<ul style="list-style-type: none"> <li>• Waist Circumference: Approx 80-120cm (Adjustable)</li> <li>• Black Part Dimension: Approx 64x9cm</li> <li>• Band Width: 4.3cm</li> <li>• Equipped With 2 D-rings</li> <li>• Easy Connection &amp; Quick Release</li> <li>• High-strength Polyester &amp; Carbon Steel</li> <li>• Wear-resistant &amp; Durable</li> </ul>
Material	Polyester, Carbon Steel
Applications	<ul style="list-style-type: none"> <li>• Great for Outdoor Climbing</li> <li>• Mountaineering</li> <li>• Personal Riding</li> <li>• Climbing</li> <li>• Rappelling etc</li> </ul>
Color	Green / Black
Sizes	Universal
Weight / Carton	12 kgs
Carton Dimension	61 x 35 x 26 cms
CBM / Carton	0.0555
Packing / Carton	20 Pieces
Origin	China



## JE210SET-C Work Positioning Lanyard

### Work Positioning and Restraint Lanyard

Standard	CE EN 358:2018, Category III
Features	<ul style="list-style-type: none"> <li>• Work Positioning Lanyard with Rope Grab</li> <li>• Kernmantle Rope: 14mm</li> <li>• 1Rope Grab, 1 Carabiner,</li> <li>• 1 Snap Hook</li> <li>• Max Length: 2000mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Work Restraint</li> <li>• Work Positioning</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	25.00 kgs
Carton Dimension	55 x 26 x 25 cms
CBM / Carton	0.0358
Packing / Carton	20 Pieces
Origin	China



## 600011 Vertical Anchor Line 10m

### Fall Arrester Vertical Lifeline

Standard	CE EN 353-2:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Vertical Lifeline</li> <li>• Flexible Anchor line (700120)</li> <li>• Length: 10meter</li> <li>• Diameter: 12mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Work Restraint</li> <li>• Work Positioning</li> </ul>
Material	High Visibility Webbing
Color	White
Sizes	Universal
Weight / Carton	20.00 kgs
Carton Dimension	45 x 30 x 40 cms
CBM / Carton	0.054
Packing / Carton	10 Pieces
Origin	China



## 600011 Vertical Anchor Line 15m

### Fall Arrester Vertical Lifeline

Standard	CE EN 353-2:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Vertical Lifeline</li> <li>• Flexible Anchor line (700120)</li> <li>• Length: 15meter</li> <li>• Diameter: 12mm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> <li>• Work Restraint</li> <li>• Work Positioning</li> </ul>
Material	High Visibility Webbing
Color	Green / Black
Sizes	Universal
Weight / Carton	19.00 kgs
Carton Dimension	45 x 30 x 40 cms
CBM / Carton	0.054
Packing / Carton	8 Pieces
Origin	China



## JE902202 Horizontal Anchor Line

### Horizontal Anchor Lifeline Type C

Standard	CE EN 795:2012, Category III
Features	<ul style="list-style-type: none"> <li>• Temporary Horizontal</li> <li>• Anchor Line</li> <li>• Webbing Width: 30mm</li> <li>• Finished Product Length: 20000mm</li> <li>• 2pcs Steel Karabiner (JE5017)</li> <li>• 1.5 Cargo Lashing</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> </ul>
Material	100% Polyester
Color	Orange
Sizes	Universal
Weight / Carton	14.80 kgs
Carton Dimension	55 x 35 x 20 cms
CBM / Carton	0.0385
Packing / Carton	4 Pieces
Origin	China





## Self Retractable/ SRL 3

Self Retracting Lifeline	
Standard	CE EN 360:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Working Length: 3meters</li> <li>• Max Arresting Distance: 54inches</li> <li>• Max Arresting Force: 6Kn</li> <li>• Capacity (CE): 100Kgs</li> <li>• Static Strength: 15kN with 3min</li> <li>• Stainless Swivel Top</li> <li>• Internal Shock Absorber System</li> <li>• Sewn-in Fall Indicator</li> <li>• Aluminum Rotatable Hook</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> </ul>
Material	Housing High Strength ABS, Webbing 20mm Dyneema
Color	Black
Sizes	Universal
Weight / Carton	8.60 kgs
Carton Dimension	47 x 31 x 26 cms
CBM / Carton	0.0379
Packing / Carton	4 Pieces
Origin	China



## Self Retractable/ SRL 6S

Self Retracting Lifeline	
Standard	CE EN 360:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Working Length: 6meters</li> <li>• Max Arresting Distance: 54inches</li> <li>• Max Arresting Force: 6Kn</li> <li>• Capacity (CE): 100Kgs</li> <li>• Static Strength: 15kN with 3min</li> <li>• Stainless Swivel Top</li> <li>• Internal Shock Absorber System</li> <li>• Sewn-in Fall Indicator</li> <li>• Aluminum Rotatable Hook</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> </ul>
Material	Housing High Strength ABS, Cable 6mm Steel
Color	Black
Sizes	Universal
Weight / Carton	18.50 kgs
Carton Dimension	58 x 46 x 33 cms
CBM / Carton	0.0880
Packing / Carton	4 Pieces
Origin	China



## Self Retractable/ SRL 10S

Self Retracting Lifeline	
Standard	CE EN 360:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Working Length: 10meters</li> <li>• Max Arresting Distance: 54inches</li> <li>• Max Arresting Force: 6Kn</li> <li>• Capacity (CE): 100Kgs</li> <li>• Static Strength: 15kN with 3min</li> <li>• Stainless Swivel Top</li> <li>• Internal Shock Absorber System</li> <li>• Sewn-in Fall Indicator</li> <li>• Aluminum Rotatable Hook</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> </ul>
Material	Housing High Strength ABS, Cable 6mm Steel
Color	Black
Sizes	Universal
Weight / Carton	13.70 kgs
Carton Dimension	52 x 32 x 33 cms
CBM / Carton	0.0549
Packing / Carton	2 Pieces
Origin	China



## Self Retractable/ SRL 15S

Self Retracting Lifeline	
Standard	CE EN 360:2002, Category III
Features	<ul style="list-style-type: none"> <li>• Working Length: 15meters</li> <li>• Max Arresting Distance: 54inches</li> <li>• Max Arresting Force: 6Kn</li> <li>• Capacity (CE): 100Kgs</li> <li>• Static Strength: 15kN with 3min</li> <li>• Stainless Swivel Top</li> <li>• Internal Shock Absorber System</li> <li>• Sewn-in Fall Indicator</li> <li>• Aluminum Rotatable Hook</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Free Fall Arrest</li> <li>• Elevated Work Platform</li> </ul>
Material	Housing High Strength ABS, Cable 6mm Steel
Color	Black
Sizes	Universal
Weight / Carton	11.70 kgs
Carton Dimension	52 x 42 x 17 cms
CBM / Carton	0.0549
Packing / Carton	1 Pieces
Origin	China



## Hook/ JE515025

Hook	
Features	🔗 76g
	⚙️ 25kN
	⚙️ 7kN
	🌀 15kN
	🌀 18mm
Material	Aluminum
Weight / Carton	12 kgs
Carton Dimension	30 x 23 x 18 cms
CBM / Carton	0.012
Packing / Carton	100 Pieces
Origin	China



## Hook/ JE515025A

Hook	
Features	🔗 83g
	⚙️ 25kN
	⚙️ 7kN
	🌀 15kN
	🌀 19 mm
Material	Aluminum
Weight / Carton	12 kgs
Carton Dimension	30 x 23 x 18 cms
CBM / Carton	0.012
Packing / Carton	100 Pieces
Origin	China



## Hook/ JE525030

Hook	
Features	🔗 92g
	⚙️ 23kN
	⚙️ 7kN
	🌀 15kN
	🌀 22mm
Material	Aluminum
Weight / Carton	10 kgs
Carton Dimension	30 x 23 x 18 cms
CBM / Carton	0.012
Packing / Carton	100 Pieces
Origin	China



## Hook/ JE525030A

Hook	
Features	🔗 87g
	⚙️ 23kN
	⚙️ 7kN
	🌀 15kN
	🌀 22mm
Material	Aluminum
Weight / Carton	12 kgs
Carton Dimension	30 x 23 x 18 cms
CBM / Carton	0.012
Packing / Carton	100 Pieces
Origin	China



## JE80016 Trauma Strip

Safety Lanyard	
Features	<ul style="list-style-type: none"><li>Webbing Width: 20mm</li><li>Max Length: 1050mm – 1200mm</li></ul>
Applications	<ul style="list-style-type: none"><li>Free Fall Arrest</li><li>Elevated Work Platform</li></ul>
Material	Polyester
Color	Black
Sizes	Universal
Weight / Carton	23 kgs
Carton Dimension	55 x 26 x 30 cms
CBM / Carton	0.0429
Packing / Carton	20 Pieces
Origin	China

## EN 420 PROTECTIVE GLOVES - GENERAL REQUIREMENTS

Gloves “just for minor risks”

Protection for:

- » Mechanical actions, the effects of which are superficial (gardening gloves etc.);
- » Bland cleaning materials with easily reversible effects (gloves that protect against diluted detergents etc.);
- » Risks encountered when handling hot components that do not expose the user to a higher temperature than 50 °C or to hazardous impact;
- » Atmospheric agents that are neither exceptional nor extreme (seasonal clothing);
- » Minor impact and vibrations that do not involve vital parts of the body, the effects of which cannot cause irreversible injuries.

## EN 388 MECHANICAL RISKS



Protection against physical and mechanical aggression caused by abrasion, blade cutting, tearing, puncture.

a Resistance to abrasion (level from 0 to 4)

b Resistance to blade cutting (level from 0 to 5)

c Resistance to tear (level from 0 to 4)

d Resistance to puncture (level from 0 to 4)

O: glove failed specific test

X: glove was not tested

## EN 1082-1 GLOVES AND SLEEVES THAT PROTECT AGAINST BLADE CUTTING



They offer a certain protection against stabbing. They are used in particular in slaughterhouses where hand knives are used and in any place where meat, fish and shellfish are processed, in catering and in manual meat boning premises. They also offer suitable protection to those who use hand knives in the plastic, leather, textile and paper industries and in laying floors and similar activities.







## Gorilla Active I Regular Gorilla Active II Premium

### Palm Coated, NBR (Nitrile Butadine Rubber)

Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Robust Thick Nitrile Coating for Increased Durability &amp; Ideal of Oily Environment</li> <li>• Excellent Dry Grip</li> <li>• Light Weight Liner for Comfort &amp; Dexterity</li> <li>• Excellent Abrasion &amp; Tear Resistance</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 13 Gauge White Polyester Liners</li> <li>• Grey Nitrile Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Automotive Industry</li> <li>• Body Shop</li> <li>• Assembly</li> <li>• General Maintenance</li> <li>• Light Metal Carpentry</li> <li>• Mechanical Industry</li> </ul>
Weight / Carton	10 kgs
Carton Dimension	45 x 26 x 25 cms.
CBM / Carton	0.0292
Packing / Carton	20 Dozen (240 Pairs)
Origin	China



## Gorilla Flex I

### Coated, NBR Microfoam (Nitrile Butadine Rubber)

Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Microfoam Nitrile Provides Excellent Durability, Dexterity &amp; Tactile Sensitivity</li> <li>• Microfoam Nitrile Coating Provides Great Grip in Oily Conditions, Lint Free Liner</li> <li>• Ergonomic Hand Shape for Comfortable Fit</li> <li>• Breathable Polymer &amp; Liner</li> <li>• Fluid/grease Repellent Polymer &amp; Liner for Clear &amp; Comfortable Hands</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 13 Gauge Grey Polyester Liners</li> <li>• Black Microfoam Nitrile Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Assembly in Presence of Oil/Grease</li> <li>• Hydraulics/Wood Working</li> <li>• Automotive Industry</li> <li>• Air/sea Transport</li> </ul>
Weight / Carton	9.65 kgs
Carton Dimension	53 x 29 x 21.50 cms
CBM / Carton	0.0330
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



## Gorilla Flex Cool I

### Superior Grip, Second-skin Comfort

Standard	CE, Cat. II EN388:2016 4121X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Fine Gauge Synthetic Liner</li> <li>• Excellent Grip in Dry, Wet Conditions</li> <li>• Spandex Content Gives a Snug Fit</li> <li>• Soft, Breathable &amp; Flexible</li> <li>• Low-Particulate Shedding</li> <li>• Abrasion Resistance (10,000+ Cycles)</li> </ul>
Coating	DexTec™ Coating
Liner	15 gg Nylon, Spandex, Polyester
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>• Automotive</li> <li>• Assembly</li> <li>• Mechanical</li> <li>• General Industry</li> <li>• Electronics</li> <li>• Industrial Manufacturing</li> </ul>
Weight / Carton	8.75 kgs
Carton Dimension	59 x 32 x 33 cms
CBM / Carton	0.0521
Packing / Carton	12 Dozen (144 Pairs)
Origin	Pakistan



## Gorilla Flex Cool II

Nitrile Foam Finish Palm Coated	
Standard	CE Cat. II EN 388:2016 4131X EN ISO 21420:2020, EN 407:2004
Features	<ul style="list-style-type: none"> <li>• Unique NBR Micro Foam Finish Provides Excellent Dry, Wet &amp; Oil Grip Performance</li> <li>• 360 Degree Breathable Coating Keeps Hand Cool &amp; Wet &amp; Oil Grip Performance</li> <li>• Special Blend of Engineered Covered Yarn for High Cut Performance &amp; Protection</li> <li>• Excellent Abrasion Resistance Allows Long Term Use &amp; Better Durability</li> <li>• Coating: Black Nitrile Rubber Coating</li> <li>• Liner: 15gg Machine Knitted</li> <li>• Grey, Black &amp; Red</li> <li>• Nylon &amp; Spandex</li> <li>• Length: 220-280mm</li> <li>• Size: Medium, Large, Xlarge</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• General Maintenance, Agriculture, Automotive</li> <li>• Construction, Mechanical Assemble</li> <li>• Precision Machinery, Engineering Workshops</li> </ul>
Weight / Carton	8.59 kgs
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	0.0487
Packing / Carton	12 Dozen (144 Pairs)
Origin	Pakistan



## Xtralite Prime

15gge Nylon-Spandex Nitrile Micro Foam Coated	
Standard	EN 388:2016 4131A/ EN 407:2020 X1XXXX
Colour	Grey/ Black
Features	<ul style="list-style-type: none"> <li>• Micro-foam Nitrile Coating oers 360° Breathability</li> <li>• Micro Foam Structure For Superior Grip In Wet And Dry Conditions</li> <li>• Ultra Thin Coating For Higher Sensitivity</li> <li>• Nylon/spandex Liner For Excellent Dexterity</li> <li>• Seamless Knitted Liner For Ultimate Comfort And Higher Flexibility</li> <li>• Washable And Reusable</li> </ul>
Material	Nylon/Spandex, Nitrile Micro foam Coating
Lining	Nylon-85%, Spandex-5%, Elastane-10%
Size	08/M, 09/L, 10/XL
Applications	<ul style="list-style-type: none"> <li>• Automotive Assembly.</li> <li>• Handling of Small Components.</li> <li>• Finishing &amp; Inspection.</li> <li>• Logistics &amp; Warehousing</li> <li>• Airport Security &amp; Baggage Handling</li> <li>• Construction, Road &amp; Rail Road Works</li> </ul>
Weight / Carton	6.50 kgs
Carton Dimension	49 x 29 x 31 cms
CBM / Carton	0.0441
Packing / Carton	12Dozen (144pairs)
Origin	Sri Lanka



## Gorilla Defender I

3/4 Coated, NBR (Nitrile Butadiene Rubber)	
Standard	CE, CAT II, EN420, EN388:2016 4121X
Features	<ul style="list-style-type: none"> <li>• Double Dip Liquid Repellant Nitrile Coating On The Palm, Finger &amp; Knuckles</li> <li>• Extra Nitrile Coating on The Palm That Provides Extra Grip In Wet, Dry &amp; Oily Conditions</li> <li>• Excellent Abrasion Resistance.</li> <li>• High Protection From Liquids up to Knuckle Area</li> <li>• Lightweight, Comfortable, Flexible With Non-slippery Finish &amp; Knit Wrist Cuff</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 13 Gauge Black Polyester Shell</li> <li>• 3/4 Blue Nitrile + Black Sandy Nitrile Coated</li> </ul>
Binding / Sizes	Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Light &amp; Precision Handling</li> <li>• Quality Control &amp; Finishing Work</li> <li>• General Maintenance/Assembly</li> <li>• Handling of Abrasive Objects in the Presence of Oil &amp; Grease</li> <li>• Hydraulics/Wood Working</li> <li>• Light Metal Carpentry</li> </ul>
Weight / Carton	8 kgs
Carton Dimension	57 x 29 x 27 cms
CBM / Carton	0.0446
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



## Gorilla Flex Oil I

Lightweight, Oil & Water-repellent	
Standard	CE, Cat. II EN388:2016 3121X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Eco-Friendly, Breathable, Touch Screen</li> <li>• Encapsulated Air Pockets Provide</li> <li>• High Resistance to Wear &amp; Tear</li> <li>• Lightweight for All-Day Wear</li> <li>• Vibration Absorption</li> <li>• Excellent Wet Grip</li> <li>• HPT® Coating</li> </ul>
Coating	HPT® Coating
Liner	15gg Ingenia™ - Blend Liner
Length	24 cm
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>• Automotive Assembly</li> <li>• Warehousing</li> <li>• General Purpose</li> <li>• Materials Handling &amp; Assembly</li> <li>• Precision-based Applications</li> <li>• Shipping &amp; Receiving</li> </ul>
Weight / Carton	7.4 Kgs
Carton Dimension	42 x 29 x 33 cms
CBM / Carton	0.0401
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



## Gorilla Black I Regular Gorilla Black II Premium

Palm Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Lightweight, Elastic, With Excellent Tactile Sensitivity</li> <li>• Exceptional Dry Grip</li> <li>• Excellent Abrasion Resistance &amp; Durability</li> <li>• Ergonomic Design With Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Black Polyester Liner</li> <li>• Black PU Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Assembly of Micro Component &amp; Printed Circuits</li> <li>• Delicate &amp; Precision Handling of Little Objects</li> <li>• Assembly of Dry Components/electronics</li> <li>• Car Manufacturing Industry</li> </ul>
Weight / Carton	Black I - 7.00 kgs Black II - 7.00 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	0.0473
Packing / Carton	20 Dozen (240 Pairs)
Origin	China



## Gorilla Grey I Regular Gorilla Grey II Premium

Palm Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Lightweight, Elastic, With Excellent Tactile Sensitivity</li> <li>• Exceptional Dry Grip</li> <li>• Excellent Abrasion Resistance &amp; Durability</li> <li>• Ergonomic Design With Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Grey Polyester Liner With</li> <li>• Grey PU Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Assembly of Micro Component &amp; Printed Circuits.</li> <li>• Delicate &amp; Precision Handling of Little Objects</li> <li>• Assembly of Dry Components/electronics</li> <li>• Car Manufacturing Industry.</li> <li>• Preparation of Cosmetics, Medicines, Etc.</li> </ul>
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	0.0473
Packing / Carton	20 Dozen (240 Pairs)
Origin	China





### Gorilla White I Regular Gorilla White II Premium

#### Palm Coated, PU (Poly Urethane)

Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Lightweight, Elastic, With Excellent Tactile Sensitivity</li> <li>• Exceptional Dry Grip</li> <li>• Excellent Abrasion Resistance &amp; Durability</li> <li>• Ergonomic Design With Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• White Polyester Liner</li> <li>• White PU Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Assembly of Micro Component &amp; Printed Circuits.</li> <li>• Delicate &amp; Precision Handling of Little Objects</li> <li>• Assembly of Dry Components/electronics</li> <li>• Car Manufacturing Industry.</li> <li>• Preparation of Cosmetics, Medicines, Etc.</li> </ul>
Weight / Carton	7.00 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	0.0473
Packing / Carton	20 Dozen (240 Pairs)
Origin	China



### Gorilla Bull I

#### Palm Coated, Latex (Natural Rubber)

Standard	CE, CATII EN388:2016 2142X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Latex</li> <li>• Wrinkle Finish For Extraordinary Dry &amp; Wet Grip</li> <li>• Ergonomic Design for a Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> <li>• High Grip Resistance</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 5 Yarns Yellow Polycotton Liner</li> <li>• Palm Coated/green Latex</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Building/ Construction/ Carpentry</li> <li>• Forestry/ Public Gardens/ Nurseries</li> <li>• Waste Collection</li> <li>• Transport Industry</li> <li>• Car Dismantlers</li> <li>• Glass Industry</li> </ul>
Weight / Carton	13 kgs
Carton Dimension	51 x 26 x 35 cms
CBM / Carton	0.0464
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



### Gorilla Bull II Yellow/Green Gorilla Bull II Grey/Blue

#### Palm Coated, Latex (Natural Rubber)

Standard	CE, CAT II EN388:2016 2142X EN 1420
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Latex</li> <li>• Wrinkle Finish For Extraordinary Dry &amp; Wet Grip</li> <li>• Ergonomic Design for a Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> <li>• High Grip Resistance</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 5 Yarns Yellow Polycotton Liner</li> <li>• Palm Coated/Green Latex</li> </ul>
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL
Applications	<ul style="list-style-type: none"> <li>• Building/ Construction/ Carpentry</li> <li>• Forestry/ Public Gardens/ Nurseries</li> <li>• Waste Collection</li> <li>• Transport Industry</li> <li>• Car Dismantlers</li> <li>• Glass Industry</li> </ul>
Weight / Carton	13 kgs
Carton Dimension	48 x 43 x 31 cms
CBM / Carton	0.0640
Packing / Carton	10 Dozen (120 Pairs)
Origin	Sri Lanka



## Gorilla Force I Regular Gorilla Force II Premium

### Palm Coated, Latex (Natural Rubber)

Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Ultralight Weight Latex Crinkle Finish Coating</li> <li>• Maximum Flexibility &amp; Durability</li> <li>• Wrinkle Finish for Extraordinary Dry &amp; Wet Grip</li> <li>• High Wear &amp; Tear Resistance</li> <li>• Ergonomic Design for a Comfortable Fit</li> <li>• Knit Wrist Cuff &amp; Breathable Back</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• 13 Gauge Red Polyester</li> <li>• Black Crinkled Latex Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Building/Construction/Carpentry</li> <li>• Forestry/Public Gardens/Nurseries</li> <li>• Waste Collection</li> <li>• Transport Industry</li> <li>• Scaffolding Applications</li> </ul>
Weight / Carton	21.00 kgs
Carton Dimension	47 x 25 x 43 cms
CBM / Carton	0.0505
Packing / Carton	20 Dozen (240 Pairs)
Origin	China



## Gorilla Cut 5 PU

### Cut5 (ISO C), Palm Coated, PU (Cut Resistant)

Standard	CE, CATII EN388:2016 4X43C EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• HDPE Fibers In The Lining Ensures Excellent Cut Resistance With Reduced Thinness For Good Dexterity</li> <li>• Palm Coated With Polyurethane</li> <li>• Excellent Mechanical Resistance &amp; Durability + Flexibility</li> <li>• Ergonomic Design for Comfortable Fit</li> <li>• Knit Wrist Cuff With Breathable Back</li> </ul>
Coating	Grey HPPE Gloves Liner/Grey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Handling Small, Sharp-edged Items</li> <li>• Automotive Industry, Metal Fabrication</li> <li>• Assembly of Dry Components</li> <li>• Photo Labs</li> <li>• Electrical Components Etc</li> </ul>
Weight / Carton	9.00 kgs
Carton Dimension	55 x 26 x 26 cms
CBM / Carton	0.0372
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



## Valpro Cut 5 PU

### Cut 5 (ISO D), Palm Coated, PU (Poly Urethane)

Standard	EN388:2016 +A1:2018 4543D EN407:2020 X1XXXX EN ISO 21420:2020
Colour	Salt & Pepper (Grey/ Black)
Features	<ul style="list-style-type: none"> <li>• HDPE Fibers In The Lining Ensures Excellent Cut Resistance With Good Dexterity</li> <li>• Palm Coated With Polyurethane</li> <li>• Excellent Mechanical Resistance &amp; Durability + Flexibility</li> <li>• Ergonomic Design For Comfortable Fit</li> <li>• Knit Wrist Cuff With Breathable Back</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Handling Small, Sharp-edged Items, Abrasive Materials Etc.</li> <li>• Assembly Of Dry Components, Electrical Components Etc.</li> <li>• Photo Labs, Automotive Industry</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	9.75 kgs
Carton Dimension	25.50 x 49.00 x 37.00 cms
CBM / Carton	0.04623
Packing / Carton	12pairs/Polybag, 120pairs/Carton
Origin	Pakistan



## Gorilla CUT 5 Nitrile

### Cut5 (ISO D), Palm Coated, Nitrile, Sandy

Standard	CE, CATII EN388:2016 4X44D EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Sandy Nitrile for Superior Grip + Increased Anti Slip Effect</li> <li>• Maximum Dexterity, Sensitivity &amp; Touch</li> <li>• Breathable Liner Allows Keep Hands Dry</li> <li>• Good Abrasion &amp; Wear Resistance</li> <li>• High Cut Resistance</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Grey HPPE Glove Liners</li> <li>• Black Sandy Nitrile Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Machining &amp; Assembly</li> <li>• Handling Small, Sharp-Edged Items</li> <li>• Abrasive Materials Etc.</li> <li>• Automotive Industry</li> <li>• Metal Fabrication</li> </ul>
Weight / Carton	10.47 kgs
Carton Dimension	58 x 26 x 28 cms
CBM / Carton	0.0422
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



## Valpro Cut 5 Microfoam

### Cut 5 (ISO D), Palm Coated Nitrile Microfoam

Standard	CE, Cat II EN 388: 2016 4X43D EN 407: 2020
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Special Microfoam Nitrile Offers Durability, Dexterity &amp; Tactile Sensitivity</li> <li>• Maximum Cut Protection Level</li> <li>• Excellent Grip in Both Dry &amp; Oily Environment</li> <li>• 365-Degree Breathability</li> <li>• Breathable Coating &amp; Breathable Liner</li> <li>• High Level of Flexibility</li> </ul>
Coating	Black Nitrile Microfoam Breathable Coating Grey HPPE Glove Liner
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL
Applications	<ul style="list-style-type: none"> <li>• Glass Industry</li> <li>• Plastic Material Injection &amp; Molding</li> <li>• Metal Working Industry</li> <li>• Metal Carpentry</li> </ul>
Weight / Carton	10.79 kgs
Carton Dimension	49 x 38 x 27 cms
CBM / Carton	0.0503
Packing / Carton	10 Dozen pair (120pairs)
Origin	Pakistan



## Gorilla CUT 5 Microfoam

### Cut5 (ISO C), Palm Coated, Nitrile, MicroFoam

Standard	CE, Cat. II EN388:2016 4544C EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Palm Coated With Special Microfoam Nitrile Offers Durability, Dexterity &amp; Tactile Sensitivity</li> <li>• Maximum Cut Protection Level</li> <li>• Excellent Grip in Both Dry &amp; Oily Environment</li> <li>• 365-Degree Breathability</li> <li>• Breathable Coating &amp; Breathable Liner</li> <li>• High Level of Flexibility</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Grey U2 Weave HPPE Glove Liners</li> <li>• Black Microfoam Nitrile Palm Coated</li> </ul>
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	<ul style="list-style-type: none"> <li>• Glass Industry</li> <li>• Plastic Material Injection &amp; Molding</li> <li>• Metal Working Industry</li> <li>• Metal Carpentry</li> <li>• Automotive Industry</li> </ul>
Weight / Carton	10.50 kgs
Carton Dimension	58 x 26 x 28 cms
CBM / Carton	0.0422
Packing / Carton	10 Dozen (120 Pairs)
Origin	China





## Gorilla Flex Cut 4/D

High Level of Cut Resistance, Superior Grip	
Standard	CE, Cat. II EN388:2016 4X42D ANSI A4 CUT
Features	<ul style="list-style-type: none"> <li>• Polyester/steel/nylon/spandex Liner</li> <li>• Excellent Grip in Dry, Wet Conditions</li> <li>• High Abrasion Resistance</li> <li>• Soft, Breathable &amp; Flexible</li> <li>• Low-particulate Shedding</li> <li>• Comfort &amp; Dexterity</li> <li>• Ergonomically Designed</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Dextec™ Coating</li> <li>• Polyester, Steel, Nylon, Spandex Liner</li> </ul>
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>• Glass Operation</li> <li>• Handling Stationary Blades</li> <li>• Auto Manufacturing</li> <li>• Ceramics Industries</li> </ul>
Weight / Carton	10.55 kgs
Carton Dimension	59 x 32 x 32 cms
CBM / Carton	0.0604
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



## Gorilla Cut C3

Nitrile Foam Finish Palm Coated Cut Resistant	
Standard	CE Cat. II EN 388:2016 4X43B EN ISO 21420:2020, EN 407:2004
Features	<ul style="list-style-type: none"> <li>• Unique NBR Micro Foam Finish Provides Excellent Dry, Wet &amp; Oil Grip Performance</li> <li>• 360 Degree Breathable Coating Keeps Hand Cool &amp; Comfortable</li> <li>• Special Blend of Engineered Covered Yarn for High Cut Performance &amp; Protection</li> <li>• Excellent Abrasion Resistance Allows Long Term Use &amp; Better Durability</li> <li>• Coating: Black Nitrile Rubber Coating</li> <li>• Liner: 18gg Machine Knitted</li> <li>• Melange Green &amp; Melange Orange</li> <li>• HPPE, Polyester, Glass, Nylon &amp; Spandex</li> <li>• Length: 210-280mm</li> <li>• Size: Medium, Large, Xlarge</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Automotive, Construction</li> <li>• Mechanical Assembly, Precision Machinery</li> <li>• Engineering, Workshop &amp; Oil &amp; Gas Industry</li> </ul>
Weight / Carton	8.59 kgs
Carton Dimension	59.00 x 23.00 x 36.00 cms
CBM / Carton	0.0489
Packing / Carton	12 Dozen (144 Pairs)
Origin	Pakistan



## Gorilla Cut C5

Nitrile Foam Finish Palm Coated Cut Resistant	
Standard	CE Cat. II, EN 388:2016 4X43C EN ISO 21420:2020 EN 407:2004, ANSI-ISEA 105:2016
Features	<ul style="list-style-type: none"> <li>• Unique NBR Micro Foam Finish Provides Excellent Dry, Wet &amp; Oil Grip Performance</li> <li>• 360 Degree Breathable Coating Keeps Hand Cool &amp; Comfortable</li> <li>• Special Blend of Engineered Covered Yarn for High Cut Performance &amp; Protection</li> <li>• Excellent Abrasion Resistance Allows Long Term Use &amp; Better Durability</li> <li>• Coating: Black Nitrile Rubber Coating</li> <li>• Liner: 15gg Machine Knitted</li> <li>• Melange Blue &amp; Melange Green</li> <li>• HPPE, Polyester, Glass, Nylon &amp; Spandex</li> <li>• Length: 210-280mm</li> <li>• Size: Medium, Large, Xlarge</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Automotive, Construction</li> <li>• Mechanical Assembly, Precision Machinery</li> <li>• Engineering, Workshop &amp; Oil &amp; Gas Industry</li> </ul>
Weight / Carton	11.76 kgs
Carton Dimension	59.00 x 23.00 x 36.00 cms
CBM / Carton	0.0489
Packing / Carton	12 Dozen (144 Pairs)
Origin	Pakistan



## Skydda Metal Mesh

5 Fingers Metal Chain Glove	
Standard	CE, EN 1082-1
Features	<ul style="list-style-type: none"> <li>• 5 Fingers Metal Mesh Glove With Textile Strap &amp; Elastic Grip</li> <li>• Improved Cleanliness &amp; Sanitation Properties</li> <li>• Flexibility &amp; Durability Reduced Bacteria Retention</li> <li>• Improved Comfort &amp; Fit, Extreme Cut &amp; Puncture Resistant</li> <li>• Non Corrosive &amp; Appropriate For Wet Environments</li> <li>• 21 Cfr Compliant</li> </ul>
Sizes	Small - White Cuff Medium - Red Cuff Large - Blue Cuff
Applications	<ul style="list-style-type: none"> <li>• Meat Processing</li> <li>• Sheet Metal Cutting/Handling</li> <li>• Carpentry</li> <li>• Textile Cutting</li> </ul>
Weight / Carton	12.50 kgs
Carton Dimension	53.50 x 23 x 19 cms
CBM / Carton	0.0234
Packing / Carton	50 Packets (50 Pieces)
Origin	China

## Viking TG

Kevlar® / Steel, 7gg, 64 Grams, Cut 5 Glove	
Standard	EN388:3521 EN407:X1XXXX
Features	<ul style="list-style-type: none"> <li>• Effective Protection, for Brief Instants</li> <li>• From the Heat By Contact (Max. 100 °C)</li> <li>• Resistance for Limited To Open Frames</li> <li>• Excellent Dexterity &amp; Tactility</li> <li>• Knit Wrist Cuff</li> <li>• Lightweight</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Suitable For Sharp &amp; Abrasive Work</li> <li>• Chassis Assembly, Body Trimming</li> <li>• Seizing Structural &amp; Body Parts</li> <li>• Inspection (Picking, Checking &amp; Marking)</li> </ul>
Weight / Carton	3.90 kgs
Carton Dimension	46 x 41 x 20 cms
CBM / Carton	0.03772
Packing / Carton	50 Pairs
Origin	Pakistan



## Tough Guard

Cut 5 High Heat 300 Degree Glove	
Standard	EN388:2543 EN407:X3XXXX
Features	<ul style="list-style-type: none"> <li>• Knitting: Seamless 7gg Double Glove</li> <li>• Outer Shell: 5 Ply 100% Kevlar® +Glass Filament</li> <li>• Inner Shell: 100% Cotton Ring Spun Yarn</li> <li>• Shell Weight: 300 G / Pair</li> <li>• Sizes: L - XL</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Steel Works, Foundries</li> <li>• Metal Works &amp; Workshops</li> <li>• Bakeries/ Ovens</li> <li>• Furnaces &amp; Kilns</li> <li>• Glass, Ceramics, Cement Industries</li> </ul>
Weight / Carton	3.90 kgs
Carton Dimension	46 x 41 x 20 cms
CBM / Carton	0.03772
Packing / Carton	50 Pairs
Origin	Pakistan





## Empiral® Original SDX 2

Impact Protection Glove	
Standard	EN 388:2016+A1:2018 EN 388: 2016 3X22A
Colour	Orange/Black
Features	<ul style="list-style-type: none"> <li>• High Performance Mechanics Gloves With Breathable 4-way Spandex Fabric on Back of Hand Along With Injected Both Bumpers for Impact Protection</li> <li>• PVC Dots on Micro Suede With Cut Material In Lined For Cut &amp; Abrasion Resistant Properties on Palm</li> <li>• Neoprene Cuff Provides Good Fit With Reflective Material for Better Visibility</li> <li>• 28% More Abrasion Resistant Than Normal Synthetic Leather</li> <li>• Empiral® Metacarpal Protection 90% Impact Absorption</li> </ul>
Material	Nylon 20%, PU 25%, Polyester 7%, Spandex 1%, Neoprene 1%, EVA 1%, TPR 45%
Size	08/M, 09/L, 10/XL
Applications	Assembly Work, Construction, Lumber Industry, Metal Fabrication
Weight / Carton	13 kgs
Carton Dimension	50.8 x 30.48 x 45.72 cms
CBM / Carton	0.071
Packing / Carton	1pair/polybag, 60pairs/Carton
Origin	Pakistan



## Empiral® Original SDX 5

Impact Protection Glove	
Standard	EN 388:2016+A1:2018 EN 388: 2016 4X43F
Colour	Yellow /Black
Features	<ul style="list-style-type: none"> <li>• Exclusive Cut Resistant Material EN388 Level F, ANSI/ISEA Level A6</li> <li>• Empiral® Metacarpal Protection</li> <li>• 90% Impact Absorption</li> <li>• Empiral® Kunckle Protection</li> <li>• 90% Impact Absorption</li> <li>• Empiral® Pending Finger Protection.</li> <li>• 82% Coverage of Impact Protection Offers Sidewall &amp; Complete Fingertip Protection</li> </ul>
Material	Nylon 15%, PU 20%, Polyester 5%, Spandex 1%, Glass6%, Para 6%, Neoprene 1%, EVA 1%, TPR 45%
Size	08/M, 09/L, 10/XL
Applications	<ul style="list-style-type: none"> <li>• Assembly Work</li> <li>• Construction</li> <li>• Lumber Industry</li> <li>• Metal Fabrication</li> <li>• Automotive Assembly &amp; Oil Field</li> </ul>
Weight / Carton	14 kgs
Carton Dimension	50.8 x 30.48 x 45.72 cms
CBM / Carton	0.071
Packing / Carton	1pair/polybag, 60pairs/Carton
Origin	Pakistan



## ValueLine I

Vinyl Impregnated Glove	
Standard	CE Cat. I
Colour	Grey, Blue/Red Cotton Striped
Features	<ul style="list-style-type: none"> <li>• Vinyl Impregnated Glove</li> <li>• Size: 10"</li> <li>• Material:</li> <li>• Back Side: Cotton Lined</li> <li>• Front Side: PVC</li> <li>• Cuff: Safety Cuff</li> <li>• Wing Thumb</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	17.50 kgs
Carton Dimension	36 x 32 x 22 cms
CBM / Carton	0.0253
Packing / Carton	20 Dozen pair/carton
Origin	China





## Valpro Shield II/ B-500-G

PVC Double Dip, 40cm length	
Standard	CE, CATIII EN388:2016 4121X EN ISO 374-1:2016/TYPE A - AKLMPST EN ISO 374-5:2016 - VIRUS EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>Tough Flexible PVC Coating With Additional Granular Coating on Hand Portion to Confer Excellent Grip In Wet &amp; Dry Applications</li> <li>Increased Thickness Gives Additional Wear &amp; Abrasion Resistance</li> <li>Ideally Suited for General Handling</li> </ul>
Coating	<ul style="list-style-type: none"> <li>C Shield Plus 500</li> <li>PVC Double Dip Coated Cotton Lined Gauntlets</li> </ul>
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>Automotive</li> <li>Assembly</li> <li>Mechanical</li> <li>General Industry</li> <li>Electronics</li> <li>Industrial Manufacturing</li> </ul>
Weight / Carton	21.73 kgs
Carton Dimension	41 x 41 x 31 cms
CBM / Carton	0.0521
Packing / Carton	6 Dozen (72 Pairs)
Origin	Bangladesh



## Gorilla Shield I

Double Dipped PVC Coated Glove	
Standard	CE, CATI
Features	<ul style="list-style-type: none"> <li>Double Dipped PVC Coated Glove</li> <li>PVC Gloves Provides Excellent Barrier Against Acid, Bases, Cutting Oils, Oils &amp; Derivatives</li> <li>Provides Excellent Resistant to Abrasion</li> <li>Good Mechanical &amp; Chemical Protection, Even In Very Humid Conditions</li> <li>Extremely Durable &amp; Wear Resistant</li> <li>Sandy Finish for Excellent Grip</li> <li>Interlock Cotton Lining for Comfort &amp; Sweat Absorption</li> <li>Length: 40cm</li> <li>Resistant &amp; Flexible at Low Temperatures</li> </ul>
Coating	Sandy PVC Glove, Jersey, Gauntlet, 40cm
Sizes	10 XL
Applications	<ul style="list-style-type: none"> <li>Chemical/Petro Chemical Industry</li> <li>Oil Refining/chemical Refining Plants</li> <li>Machining</li> <li>Handling Oils, Acids, Caustics &amp; Alcohols</li> <li>Janitorial Activities</li> </ul>
Weight / Carton	13 kgs
Carton Dimension	41 x 28 x 46 cms
CBM / Carton	0.0298
Packing / Carton	6 Dozen (72 Pairs)
Origin	China



## Gorilla Shield Lite II

PVC Single Dip, 40cm length	
Standard	CE, CATII EN388:2016 4111X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>General Purpose Handling Glove</li> <li>Tough Flexible Smooth PVC Coating Will Withstand Abrasion in Dry Handling Conditions</li> <li>Flared Gauntlet for Ease Of Removal</li> <li>Actifresh or Sanitized Treated to Provide Some Protection Against Organisms Which Give Rise to Bad Odour &amp; Cross Infection</li> </ul>
Coating	<ul style="list-style-type: none"> <li>Smooth Shield 50 Gauntlet Series B-200-50-G Gauntlets</li> <li>Pvc Fully Coated Cotton Lined Gauntlet</li> </ul>
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>Cargo Handling</li> <li>Handling Boxes</li> <li>Recycling</li> <li>Industrial Manufacturing</li> <li>Mechanical</li> <li>Warehousing</li> </ul>
Weight / Carton	18.28 kgs
Carton Dimension	41 x 41 x 31 cms
CBM / Carton	0.0521
Packing / Carton	6 Dozen (72 Pairs)
Origin	Bangladesh



## Gorilla Chem I

**Green, Nitrile, Flocklined, 15mil(Chemical Resistant)**

<b>Standard</b>	CE, CATII EN388:2016 3102X EN420:2003/A1:2009
<b>Features</b>	<ul style="list-style-type: none"> <li>• Cotton Flock Lining Absorbs Perspiration &amp; Improves Comfort</li> <li>• Good Barrier for Handling Solvents, Oil Based Chemical Agents, Oils, Animal Fats, Oil Derivatives</li> <li>• Nonslip Pattern for Extra Grip</li> <li>• Excellent Abrasion Resistance</li> </ul>
<b>Coating</b>	<ul style="list-style-type: none"> <li>• Green Nitrile Glove, Thickness</li> <li>• 15 Mil(0.38mm), Length:30cm</li> </ul>
<b>Sizes</b>	Medium, Large, XLarge
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Chemical Industry</li> <li>• Food Industry</li> <li>• Refineries</li> <li>• Printing Industry/Publishing</li> <li>• Production And Application of Pants &amp; Varnishes, Degreasing</li> <li>• Handling/assembly of Oily Parts</li> </ul>
<b>Weight / Carton</b>	9 kgs
<b>Carton Dimension</b>	36 x 32 x 24 cms
<b>CBM / Carton</b>	0.0276
<b>Packing / Carton</b>	10 Dozen (120 Pairs)
<b>Origin</b>	China



## Gorilla Chem II

**15mill (0.038mm) Flock Lined Nitrile Glove**

<b>Standard</b>	ASTM D4679-02 (Re-approved 2015) EN 420:2003+AI:2009 EN 388:2016 4001X EN ISO 374-5:2016 EN ISO 374-1:2016 21CFR 177.2600
<b>Features</b>	<ul style="list-style-type: none"> <li>• Nitrile Rubber Glove, Washed</li> <li>• Comfortable, Reusable</li> <li>• Fingertip Precision, Good Dexterity</li> <li>• Good Grip - Reverse Lozenge Grip Pattern</li> <li>• Good Solvent Resistance</li> <li>• Reduced Risk of Allergic Reactions</li> <li>• Free of Extractable Proteins</li> <li>• Silicon Free</li> </ul>
<b>Sizes</b>	Medium, Large, XLarge
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Printing Industry, Petrochemical Industry</li> <li>• Metal Fabrication, Chemical Processing,</li> <li>• Oil Refining, Cleaning &amp; Degreasing</li> <li>• Chemical Plants &amp; Transportation</li> <li>• Food Processing/Food Handling</li> </ul>
<b>Weight / Carton</b>	12.40 kgs
<b>Carton Dimension</b>	38 x 30 x 30 cms
<b>CBM / Carton</b>	0.0342
<b>Packing / Carton</b>	12 Dozen (144 Pairs)
<b>Origin</b>	Sri Lanka



## Gorilla Flex Chem I

**Ultimate in Chemical Resistance**

<b>Standard</b>	CE, Cat. III EN388:2016 4131X EN ISO 374-1:2016/TYPER A AKLMPT EN ISO 374-5:2016 EN374-4:2013 - EN420:2003/A1:2009
<b>Features</b>	<ul style="list-style-type: none"> <li>• Ultra-soft &amp; Flexible Chemical Resistant</li> <li>• Unique Textured Bi-Polymer Coating</li> <li>• Exceptional Grip in Wet &amp; Dry</li> <li>• Ergonomic Hand Shape</li> <li>• Ergonomic Design</li> <li>• Low Risk of Particle Shedding</li> </ul>
<b>Coating</b>	15 gg Nylon
<b>Liner</b>	Bi-polymer coating finish
<b>Sizes</b>	Medium, Large, XLarge
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Chemical Handling</li> <li>• Agrochemicals</li> <li>• Agriculture/Harvesting</li> <li>• Fishing</li> <li>• Household Cleaning</li> <li>• Industrial Painting</li> </ul>
<b>Weight / Carton</b>	14.74 kgs
<b>Carton Dimension</b>	42 x 40 x 42 cms
<b>CBM / Carton</b>	0.0705
<b>Packing / Carton</b>	6 Dozen (72 Pairs)
<b>Origin</b>	Pakistan



## Gorilla Extreme I

### 3/4 Coated, NBR, Jersey (Nitrile Butadiene Rubber)

Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• Palm, Finger &amp; Knuckle Coated</li> <li>• N.B.R. Coating Provides Excellent Resistance to Solvents, Hydrocarbons &amp; Its Derivatives Oils &amp; Grease</li> <li>• Excellent Resistance to Abrasion</li> <li>• Cotton Canvas Safety Cuff for Protection</li> <li>• Jersey Lining for Comfort &amp; Sweat Absorption</li> <li>• Protection Against Heavy Duty Jobs</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Jersey Liners With Safety Cuff</li> <li>• Blue Nitrile 3/4 Coated</li> </ul>
Binding / Sizes	Large, XLarge
Applications	<ul style="list-style-type: none"> <li>• Road Construction</li> <li>• General Maintenance</li> <li>• Waste Collection/Forestry</li> <li>• Mechanical Engineering</li> <li>• Processing of Metals, Steel Bars</li> </ul>
Weight / Carton	14 kgs
Carton Dimension	70 x 27 x 37 cms
CBM / Carton	0.0699
Packing / Carton	10 Dozen (120 Pairs)
Origin	China



## Gorilla Extreme II

### Full Nitrile Dipped Jersey (Heavy Weight Nitrile)

Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009
Features	<ul style="list-style-type: none"> <li>• The Gloves Have a Heavy Weight</li> <li>• Nitrile Full Coated</li> <li>• The Inner is a 100% Jersey With a Cotton Wristing</li> <li>• Canvas Safety Cuff</li> <li>• The Gloves Are Excellent for All Round General Handling Situations</li> </ul>
Coating	<ul style="list-style-type: none"> <li>• Jersey Liner, Safety cuff</li> <li>• V9900 Series Nitrile Smooth Coating, Blue</li> </ul>
Length	26 cm
Sizes	Medium, Large, XLarge
Applications	<ul style="list-style-type: none"> <li>• Cargo Handling</li> <li>• Handling Boxes</li> <li>• Recycling</li> <li>• Industrial Manufacturing</li> <li>• Mechanical</li> <li>• Warehousing</li> </ul>
Weight / Carton	20.30 kgs
Carton Dimension	56 x 45 x 33 cms
CBM / Carton	0.0832
Packing / Carton	12 Dozen (144 Pairs)
Origin	Bangladesh



## LP RB Rabbit

### Unlined Latex Industrial Rubber Gloves, Chlorinated

Standard	<ul style="list-style-type: none"> <li>• EN 388:2016+A1:2018, EN 420:2003+A1:2009</li> <li>• EN ISO 374-1:2016+A1:2018</li> <li>• Dexterity: Level 5</li> <li>• PH of Glove &amp; Lining: Greater Than 3.5 &amp; Lower Than 9.5</li> <li>• Chromium VI is Lower Than The Detection Limit Size Within Conformity</li> <li>• The Glove Meets The Essential Requirements of The Protection Equipment Directive (R 2016/425)</li> <li>• This Glove is Designed for Mechanical Risks &amp; it is a Category II Product</li> </ul>
Features	<ul style="list-style-type: none"> <li>• Good Chemical Corrosive Resistance</li> <li>• Air-Tightness, Liquid Permeability</li> <li>• Comfortable &amp; Excellent Flexibility</li> <li>• Good Grip in Dry &amp; Wet Working Conditions</li> <li>• Colour: Black</li> <li>• Material: Natural Latex</li> <li>• Inside Liner: Unlined</li> <li>• Palm: Diamond Griip</li> <li>• Thickness: 21.6mil/ 0.55mm</li> </ul>
Applications	Refrigerated Warehouses, Material Handling Frozen Food Processing
Weight / Carton	8.2 kgs
Carton Dimension	36 x 32 x 22 cms
CBM / Carton	0.253
Packing / Carton	12pairs/bundle, 120pairs/Carton
Origin	China





**DPL**  
Handling you with care

## LinePro

Rubber Insulating Gloves	
Standard	EN 60903:2003 PPE Regulation (EU) 2016/425
Colour	Red
Features	<ul style="list-style-type: none"> <li>Made with Special Grade Natural Rubber Compound.</li> <li>Higher Flexibility for Wear Comfort.</li> <li>100% QC Inspection.</li> <li>Packed in Opaque UV Resistant Bag</li> <li>Each Glove is Inspected/Tested for</li> <li>Electrical Insulation</li> </ul>
Size	09/L, 10/XL
Linning	Unlined, Chlorinated
Class/ Voltage	Class 00 (500v) Class 0 (1000v) Class 1 (7500v) Class 2 (17000v) Class 3 (26500v) Class 4 (360000v)
Applications	<ul style="list-style-type: none"> <li>Power Companies</li> <li>Electrical Workshop</li> <li>Insulation</li> <li>Maintenance</li> <li>Repair involving High Voltage</li> </ul>
Origin	Sri Lanka



## RF1 Multi Purpose

Natural Rubber, Flocklined Glove	
Standard	EN 388: 2016 + A1: 2018 EN ISO 374-1:2016 + A1: 2018 / TYPE B EN ISO 374-5:2016, EN 421:2010
Features	<ul style="list-style-type: none"> <li>Material: Natural Rubber</li> <li>Colour: Yellow,</li> <li>Type of Lining: Cotton Flock</li> <li>Size: S, M, L, XL</li> </ul>
Weight/pair (g)	53 +/- 2 (M), 58 +/- 2 (L), 63 +/- 2 (XL), Length (mm): 300 +/- 10
Compliance with	<ul style="list-style-type: none"> <li>Food Contact Materials –</li> <li>Regulation (EC) No 1935/2004</li> <li>Personal Protective Equipment Regulation</li> <li>(EU) 2016/425 Under Category III</li> <li>Complex Design</li> <li>EU Type Examination &amp; Ongoing Conformity (Module D) Issued by</li> <li>SATRA EUROPE (NB 2777)</li> <li>FDA Part 21 CFR 177.260</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Household Chores</li> <li>Food Processing</li> <li>Cleaning &amp; Janitorial</li> </ul>
Weight / Carton	9.35 kgs
Carton Dimension	37 x 27 x 29 cms
CBM / Carton	0.30
Packing / Carton	12pairs/bundle, 144pairs/Carton
Origin	Malaysia



## HD 27 NEO Latex Neoprene

Neoprene/Natural Rubber, Flocklined Glove	
Standard	EN 388: 2016 + A1: 2018 EN ISO 374-1:2016 + A1: 2018 / TYPE A EN ISO 374-5:2016
Features	<ul style="list-style-type: none"> <li>Material: Neoprene/ Natural Rubber</li> <li>Colour: Black</li> <li>Type of Lining: Cotton Flock</li> <li>Size: M, L, XL</li> <li>Thickness (mm): 0.68 +/- 0.03</li> <li>Length (mm): 320 +/- 10</li> </ul>
Compliance with	<ul style="list-style-type: none"> <li>Food Contact Materials –</li> <li>Regulation (EC) No 1935/2004</li> <li>Personal Protective Equipment Regulation</li> <li>(EU) 2016/425 Under Category III</li> <li>Complex Design</li> <li>EU Type Examination &amp; Ongoing conformity (Module D) Issued by</li> <li>SATRA EUROPE (NB 2777)</li> <li>FDA Part 21 CFR 177.260</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Heavyduty Industries</li> <li>Food Processing</li> <li>Gardening &amp; Janitoria</li> </ul>
Weight / Carton	17.80 kgs
Carton Dimension	37 x 29 x 36.8 cms
CBM / Carton	0.39
Packing / Carton	12pairs/bundle, 144pairs/Carton
Origin	Malaysia



## Gorilla Vinyl I

### Powder Free Vinyl Disposable Glove

Standard	CE Cat. III EN 420:2003 +A:2009 EN 16523-1:2015 EN 374-4:2013 EN 374-2:2014
Features	<ul style="list-style-type: none"> <li>• Non-Sterile</li> <li>• Ambidextrous</li> <li>• Resistance to Permeation by Chemical</li> <li>• Degradation by Chemical</li> <li>• Tested for Air Leak &amp; Water Leak</li> <li>• Size: Small, Medium, Large, XLarge</li> <li>• Color: Blue</li> <li>• Thickness: 3.2mil</li> <li>• Average Weight (Size: XLarge): 6.4g</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Transferring Liquids &amp; Solids</li> <li>• Sample Taking</li> <li>• Processing Meat</li> <li>• Fish &amp; Food Processing Maintenance</li> <li>• Laboratory Analysis</li> <li>• Chemical Handling</li> </ul>
Weight / Carton	6 kgs
Carton Dimension	32 x 22 x 22 cms
CBM / Carton	0.015
Packing / Carton	10 Packets
Origin	China



## Gorilla Vinyl II

### Powder Free Vinyl Disposable Glove

Standard	CE Cat. III EN 420:2003 +A:2009 EN 16523-1:2015 EN 374-4:2013 EN 374-2:2014
Features	<ul style="list-style-type: none"> <li>• Non-Sterile</li> <li>• Ambidextrous</li> <li>• Resistance to Permeation by Chemical</li> <li>• Degradation by Chemical</li> <li>• Tested for Air Leak &amp; Water Leak</li> <li>• Size: Small, Medium, Large, XLarge</li> <li>• Color: Transparent</li> <li>• Thickness: 3.2mil</li> <li>• Average Weight (Size: XLarge): 6.4g</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Transferring Liquids &amp; Solids</li> <li>• Sample Taking</li> <li>• Processing Meat</li> <li>• Fish &amp; Food Processing Maintenance</li> <li>• Laboratory Analysis</li> <li>• Chemical Handling</li> </ul>
Weight / Carton	6 kgs
Carton Dimension	32 x 22 x 22 cms
CBM / Carton	0.015
Packing / Carton	10 Packets
Origin	China



## Gorilla Nitro I Gorilla Nitro II

### Powder Free Co-Polymer Nitrile Examination Glove

Standard	EN 374-4:2019 EN 374-2:2019 EN 16523-1+A1 2018 EN 455-1 :2020 EN 455-3:2015,PROP65
Features	<ul style="list-style-type: none"> <li>• Powder Free Co-Polymer Nitrile Examination Glove with Finger Texture</li> <li>• Thickness: 3.2mil</li> <li>• Average weight (Size: L): 5.5gram</li> <li>• Material: Nitrile (NBR)+ Dioctyl Terephthalate + Polyvinyl chloride Type: Powder Free</li> <li>• Finish: Chlorinated</li> <li>• Quality Level (AQL):1.5 (Premium), Length: 230mm (min) Tensile Strength: 16Mpa (min) Elongation at Break: 450% (min)</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Transferring Liquids &amp; Solids</li> <li>• Sample Taking &amp; Processing Meat</li> <li>• Fish &amp; Food Processing Maintenance</li> <li>• Laboratory Analysis</li> <li>• Chemical Handling</li> </ul>
Weight / Carton	6.50 kgs
Carton Dimension	31.00 x 24.60 x 23.80 cms
CBM / Carton	0.018
Packing / Carton	10 Packets
Origin	China



## Blue KNDDA Blue KNDDA II

Double Side Dotted Gloves Blue KNDDA	
Standard	EN 388 : 2003
Features	<ul style="list-style-type: none"> <li>• Knitted on 10guage Machine</li> <li>• Durable T/C Yarn</li> <li>• Double Side Blue PVC Dots</li> <li>• Knitted Wrist With Overlock</li> <li>• Tiger Paw &amp; Parallel Dots for Extra Grip &amp; Comfort</li> </ul>
Color	Navy Blue
Applications	<ul style="list-style-type: none"> <li>• Multipurpose Reusable Gloves</li> <li>• Engineering</li> <li>• Automobile Battery</li> <li>• Working With Molten Metals</li> <li>• Cement</li> <li>• Petrochemicals</li> <li>• Ferrous &amp; Non-ferrous</li> <li>• Metallurgical Industries</li> <li>• Fertilizer</li> <li>• Foundries</li> </ul>
Origin	Pakistan



## Blue KNSDA Blue KNSDA II

Single Side Dotted Gloves Blue KNSDA	
Standard	EN 388 : 2003
Features	<ul style="list-style-type: none"> <li>• Knitted on 10guage Machine</li> <li>• Durable T/C Yarn</li> <li>• Double Side Blue PVC Dots</li> <li>• Knitted Wrist With Overlock</li> <li>• Tiger Paw &amp; Parallel Dots for Extra Grip &amp; Comfort</li> </ul>
Color	Navy Blue
Applications	<ul style="list-style-type: none"> <li>• Multipurpose Reusable Gloves</li> <li>• Power Generation</li> <li>• Sanding</li> <li>• Tyre Manufacturing</li> <li>• Construction</li> <li>• Coal Industries</li> <li>• Pharmaceutical</li> <li>• Chemical</li> </ul>
Origin	Pakistan



## Drill Dotted Gloves

8 / 10 / 12 / 14 / 16 Ounce	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Cotton With PVC Dots</li> <li>• Knitted Wrist Seals Out Dirt &amp; Debris</li> <li>• PVC Polka Dots Provides Superior Grip in Dry Conditions for Safe &amp; Secure Handling Comfort</li> </ul>
Weight	8 / 10 / 12 / 14 / 16 Ounce
Applications	<ul style="list-style-type: none"> <li>• General Purpose</li> <li>• Maintenance</li> <li>• Manufacturing</li> <li>• Warehouse Operation</li> <li>• Parts Handling etc</li> </ul>
Weight / Carton	19.60 kgs
Carton Dimension	54 x 22 x 52 cms
CBM / Carton	0.0618
Packing / Carton	25 Dozen (300 Pairs)
Origin	Pakistan





## Cotton BW400

Bleach White Cotton Knitted Gloves	
Standard	CE CAT I
Features	<ul style="list-style-type: none"> <li>• Knitted on 7 Gauge Machine</li> <li>• Durable T/c Yarn</li> <li>• Knitted Wrist With White Overlock</li> <li>• Minimum Lint</li> </ul>
Weight	400 Grams
Applications	<ul style="list-style-type: none"> <li>• Multipurpose Reusable Gloves</li> <li>• Ceramics</li> <li>• Dyes &amp; Dyestuffs</li> <li>• Glass Etching</li> <li>• Grinding</li> <li>• Paper Processing</li> <li>• Paints &amp; Pigments</li> </ul>
Weight / Carton	9.80 kgs
Carton Dimension	44 x 25 x 50 cms
CBM / Carton	0.055
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan



## Cotton BW600

Bleach White Cotton Knitted Gloves	
Standard	CE CAT I
Features	<ul style="list-style-type: none"> <li>• Knitted on 7 Gauge Machine</li> <li>• Durable T/c Yarn</li> <li>• Knitted Wrist With White Overlock</li> <li>• Minimum Lint</li> </ul>
Weight	600 Grams
Applications	<ul style="list-style-type: none"> <li>• Multipurpose Reusable Gloves</li> <li>• Ceramics</li> <li>• Dyes &amp; Dyestuffs</li> <li>• Glass Etching</li> <li>• Grinding</li> <li>• Paper Processing</li> <li>• Paints &amp; Pigments</li> </ul>
Weight / Carton	13.65 kgs
Carton Dimension	55 x 44 x 27 cms
CBM / Carton	0.06534
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan



## Cotton BW840

Bleach White Cotton Knitted Gloves	
Standard	CE CAT I
Features	<ul style="list-style-type: none"> <li>• Knitted on 7 Gauge Machine</li> <li>• Durable T/c Yarn</li> <li>• Knitted Wrist With White Overlock</li> <li>• Minimum Lint</li> </ul>
Weight	840 Grams
Applications	<ul style="list-style-type: none"> <li>• Multipurpose Reusable Gloves</li> <li>• Ceramics</li> <li>• Dyes &amp; Dyestuffs</li> <li>• Glass Etching</li> <li>• Grinding</li> <li>• Paper Processing</li> <li>• Paints &amp; Pigments</li> </ul>
Weight / Carton	18.90 kgs
Carton Dimension	48 x 26 x 60 cms
CBM / Carton	0.07488
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan



## HDPE Gloves

0.6g, Transparent	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Light Weight, Durable</li> <li>• Resist Tearing</li> <li>• Latex Free</li> <li>• Easy Application &amp; Remove of Glove From Hand</li> <li>• Seamless &amp; Ambidextrous</li> <li>• Material: HDPE</li> <li>• Style: Powder Free</li> <li>• Color: Transparent</li> <li>• Size: Universal</li> </ul>
Applications	Manufacturing & Food Processing Handling, Hygiene
Weight / Carton	6 kgs
Carton Dimension	37 x 27 x 17 cms
CBM / Carton	0.017
Packing / Carton	100 Bags
Origin	China



## DuPont Kevlar Sleeves

Kevlar Arm / Hand Protection	
Standard	ISO 9001:2008
Length	22inch With Thumb-Hole
Features	<ul style="list-style-type: none"> <li>• Double Ply 100% Dupont™ Kevlar®</li> <li>• Brand Fiber Cut Resistant Sleeves</li> <li>• Good Cut Protection &amp; Heat Resistance Properties</li> <li>• Thumb Slot, Flared Forearm</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Assembly and finishing</li> <li>• Sheet metals and metalwork</li> <li>• Body assembly</li> <li>• Stamping operations</li> <li>• Assembly of white goods</li> <li>• Glass repair</li> </ul>
Weight / Carton	15.77 kgs
Carton Dimension	35 x 66 x 35 cms
CBM / Carton	0.08085
Packing / Carton	100 Pairs
Origin	Pakistan



## PP Sleeves

Arm Sleeves with Elastic Cuff	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Protects From Paint Powder, Dirt, Grease &amp; Grime to Keep the Skin Safe</li> <li>• Latex Free Elastic Cuff, to</li> <li>• Protect Against Contamination</li> <li>• Light Weight</li> <li>• Safety &amp; Comfort</li> </ul>
Material	PP Non-Woven
Weight	20 GSM
Color	Blue
Size	16 Inches
Applications	<ul style="list-style-type: none"> <li>• Hospital</li> <li>• Janitorial</li> <li>• Clean Room</li> <li>• Beauty Salons</li> </ul>
Weight / Carton	3.50 kgs
Carton Dimension	38 x 26 x 36 cms
CBM / Carton	0.0356
Packing / Carton	10 Bags
Origin	China



## 1006-NT/ASK-1001

### Leather Rigger Glove, Double Palm

Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Double Palm</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour:Natural</li> <li>• Size:10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	20 kgs
Carton Dimension	44.50 x 26.50 x 43 cms
CBM / Carton	0.050
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan



## 1006-YW/ASK-1001

### Leather Rigger Glove, Double Palm

Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Double Palm</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour:Yellow</li> <li>• Size:10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	29 kgs
Carton Dimension	28 x 28 x 83.80 cms
CBM / Carton	0.0657
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



## 1005-FL/1026

### Leather Rigger Glove, Single Palm

Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2010
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Single Palm Premium</li> <li>• Ref. Tape</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour:Fluorescent</li> <li>• Size:10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	18.5 kgs
Carton Dimension	40.5 x 26.5 x 43 cms
CBM / Carton	0.0461
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan





## 1007-RD/1026

### Leather Rigger Glove, Single Palm Premium

Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2009
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Single Palm Premium</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Red</li> <li>• Size: 10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	17 kgs
Carton Dimension	40.5 x 26.5 x 43 cms
CBM / Carton	0.0461
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan



## 1008-GR/1034

## 1008E-GR/1034

### Leather Rigger Glove, Single Palm

Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2011
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Single Palm</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Green Stripes</li> <li>• Size: 10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Packing / Carton	<ul style="list-style-type: none"> <li>• 1008 - GR: 6 Dozen (72 Pairs)</li> <li>• 1008E - GR: 10 Dozen (120 Pairs)</li> </ul>
Origin	Pakistan



## 1002-OR/1034

### Leather Rigger Glove, Single Palm

Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2009
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Single Palm Economy</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Orange</li> <li>• Size: 10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	28 kgs
Carton Dimension	28 x 28 x 78.74 cms
CBM / Carton	0.0617
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



### 1009-YW/1034

#### Leather Rigger Glove, Patch Palm

Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2010
Features	<ul style="list-style-type: none"> <li>• Cow Split Leather</li> <li>• Patch Palm Economy</li> <li>• Cotton Lined on Palm</li> <li>• Rubberized Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Yellow</li> <li>• Size: 10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	28 kgs
Carton Dimension	28 x 28 x 83 cms
CBM / Carton	0.065
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



### 1010-YW/1034

#### Leather Rigger Glove, Patch Palm

Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2010
Features	<ul style="list-style-type: none"> <li>• Yellow Cow Hide Split</li> <li>• Patch Palm Leather</li> <li>• Reinforced Palm</li> <li>• Thumb &amp; Index Finger</li> <li>• Safety Cuff for Extra Protection With Yellow Back</li> <li>• Size: 10.5</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	27.30 kgs
Carton Dimension	29 x 28 x 84 cms
CBM / Carton	0.068
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



### 1001H-YW/ASK-2014

#### Leather Welding Glove, Hockey Palm

Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	<ul style="list-style-type: none"> <li>• Welding Glove</li> <li>• Hockey Palm</li> <li>• Cow Split Leather</li> <li>• Cotton Lined on Palm</li> <li>• Canvas lining Inside on the Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Yellow</li> <li>• Size: 16</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	28.50 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	0.075
Packing / Carton	5 Dozen (60 Pairs)
Origin	Pakistan



## 1001K-GD/ASK-2014

### Leather Welding Glove, Kevlar Stitched

Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	<ul style="list-style-type: none"> <li>• Welding Glove</li> <li>• Kevlar Stitched</li> <li>• Cow Split Leather</li> <li>• Cotton Lined on Palm</li> <li>• Canvas lining Inside on the Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Golden</li> <li>• Size: 16"</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	28 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	0.075
Packing / Carton	5 Dozen (60 Pairs)
Origin	Pakistan



## 1001-RD/ASK-2014 RD

### Leather Welding Glove without Piping

Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	<ul style="list-style-type: none"> <li>• Welding Glove</li> <li>• Cow Split Leather</li> <li>• Cotton Lined on Palm</li> <li>• Canvas lining Inside on the Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Red</li> <li>• Size: 16"</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	31 kgs
Carton Dimension	40.66x33x67.30 cms
CBM / Carton	0.0903
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan



## 1001W-RD/ASK-2014 RD

### Leather Welding Glove, Welted Seams

Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	<ul style="list-style-type: none"> <li>• Welding Glove</li> <li>• Welted Seams</li> <li>• Cow Split Leather</li> <li>• Cotton Lined on Palm</li> <li>• Canvas lining Inside on the Cuff</li> <li>• Wing Thumb</li> <li>• Colour: Red</li> <li>• Size: 16"</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Construction</li> <li>• Utility</li> <li>• Engineering</li> <li>• Manufacturing</li> <li>• Automotive</li> </ul>
Weight / Carton	27 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	0.075
Packing / Carton	5 Dozen (60 Pairs)
Origin	Pakistan





## TIG Welding Gloves

Premium A+ Grain & Split Leather	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Size: 14inch</li> <li>• Wing Thumb</li> <li>• Full Grain Leather</li> <li>• Durable, Flexible,</li> <li>• Excellent Comfort</li> <li>• Breathable, Long-wearing,</li> <li>• It Has Excellent Dexterity &amp; High Mechanical Resistance</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• General Maintenance</li> <li>• TIG/MIG Welding</li> <li>• Do it yourself</li> </ul>
Weight / Carton	22.64 kgs
Carton Dimension	59 x 37 x 33 cms
CBM / Carton	0.072
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



## Driver Gloves

Full Grain Premium Driver Gloves	
Standard	CE CAT 1
Features	<ul style="list-style-type: none"> <li>• Size: 10.5inch</li> <li>• Wing Thumb</li> <li>• Full Grain Leather</li> <li>• Durable, Flexible</li> <li>• Excellent Comfort</li> <li>• Breathable, Long-wearing</li> <li>• It Has Excellent Dexterity &amp; High Mechanical Resistance</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• General Maintenance</li> <li>• Building / Construction</li> <li>• Warehousing / Logistics</li> <li>• Automotive industry</li> <li>• Transportation</li> </ul>
Weight / Carton	12.62 kgs
Carton Dimension	61 x 25 x 26 cms
CBM / Carton	0.04
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



## 3602 - Freezer

Freezer Gloves With Fleece Flinning	
Standard	CE Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Size: 10.5inch</li> <li>• Straight Thumb</li> <li>• Full Grain Leather</li> <li>• Polyester Fleece Lining to Resist Cold</li> <li>• Durable, Flexible</li> <li>• Excellent Comfort</li> <li>• Breathable, Long-wearing</li> <li>• It HasExcellent Dexterity &amp; High Mechanical Resistance</li> <li>• Elastic Knit Wrist</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Freezer &amp; Cold Storage</li> <li>• Food Handling</li> </ul>
Weight / Carton	8.10 kgs
Carton Dimension	28 x 83 x 26 cms
CBM / Carton	0.0604
Packing / Carton	100 pairs
Origin	Pakistan



## 3601- Freezer

Freezer Gloves With Fleece Flinning	
Standard	CE Cat. I, EN 388
Features	<ul style="list-style-type: none"> <li>• Size: 10.5inch</li> <li>• Straight Thumb</li> <li>• Full Grain Leather</li> <li>• Polyester Fleece Lining to Resist Cold</li> <li>• Durable, Flexible</li> <li>• Excellent Comfort</li> <li>• Breathable, Long-wearing</li> <li>• It Has Excellent Dexterity &amp; High Mechanical Resistance</li> <li>• Elastic Knit Wrist</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Cold Environment</li> <li>• Handling Cold Objects</li> <li>• General Maintenance</li> <li>• Building / Construction</li> <li>• Warehousing / Logistics</li> </ul>
Weight / Carton	11 kgs
Carton Dimension	28 x 83 x 26 cms
CBM / Carton	0.0604
Packing / Carton	100 pairs
Origin	Pakistan

EN ISO 20344*	Test methods for shoes
EN 344	
EN ISO 20345	Safety shoes with toe cap that withstands impact force up to 200 J and compressions up to 15 kN (S CATEGORY)
EN ISO 20347	Work shoes without toe cap (O CATEGORY)
EN ISO 17249	Safety shoes that offer protection against chainsaw cutting
EN ISO 13287	Method for testing resistance to slipping

\*PPE certified since 2006

### CLASSIFICATION

CATEGORY	SAFETY REQUIREMENTS	TYPE I o TYPE II	TYPE I Leather shoes and other materials				TYPE II Completely rubber or polymeric shoes	
			SB	S1P	S1	S2	S3	S4 S5
	Safety footwear		SB	S1P	S1	S2	S3	S4 S5
	Working footwear		OB	O1P	O1	O2	O3	O4 O5
	Base requirements		x	x	x	x	x	x
	Slip resistance SR A/B/C*		x	x	x	x	x	x
	Anti-static A		o	x	x	x	x	x
	Heel protection against impact E		o	x	x	x	x	x
	Water penetration and absorption WRU (Applicable Only for Type I shoes)		o	o	o	x	x	
	Perforation resistance P		o	x	o	o	x	o x
	Conductivity C		o	o	o	o	o	o
	Heat insulation HI		o	o	o	o	o	o
	Cold insulation CI		o	o	o	o	o	o
	Heat by contact resistance HRO		o	o	o	o	o	o
	Water resistance WR (Only for Type I shoes)		o	o	o	o	o	o
	Ankle protection AN		o	o	o	o	o	o
	Cutting resistance CR		o	o	o	o	o	o
	Metatarsal protection M (Only for safety shoes)		o	o	o	o	o	o
	Hydrocarbons resistance FO (Optional for all the categories of working footwear and for the SB category, base requirement or all the other categories of safety footwear)		o	x	x	x	x	x

\*PPE certified since 2009 x: mandatory requirement o: optional requirement



# FOOT PROTECTION



## Best Workman/ L-7141

S1P SRC Leather Shoe	
Standard	CE EN ISO 20345:2011 S1P
Category	S1P
Upper	Black Embossed Cow Leather
Lining	Breathable BK Air Mesh
Insock	Breathable EVA Insock
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	61 x 44 x 33 cms
CBM / Carton	0.0885
Packing / Carton	10 Pairs
Origin	China



## Best Run / L-7222

S3 SRC Safety Shoe	
Standard	CE EN ISO 20345:2011 S3
Category	S3 SRC
Upper	High Quality Embossed Cow Leather
Lining	Breathable & Abrasion Resistant Oxford Mesh
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	14.49 kgs
Carton Dimension	62 x 45 x 35 cms
CBM / Carton	0.09765
Packing / Carton	10 Pairs
Origin	China



METAL FREE



## Best Manager/ L-7006B

S3 SRC Leather Executive Shoe	
Standard	CE EN ISO 20345:2011 S1P
Category	S3 SRC
Upper	High Quality Smooth Grain Cow Leather
Lining	Abrasion Resistant BK Mesh
Insock	Breathable EVA Insock
Outsole	PU / PU Injection, Double Density
Toe	Composite Toecap to Resist 200 Joules Impact
Penetration	Kevlar Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	62 x 47 x 33 cms
CBM / Carton	0.096
Packing / Carton	10 Pairs
Origin	China



METAL FREE



## Best Sport/ L-7296 EH

EH SBP + I SRC Safety Shoe	
Standard	CE EN ISO 20345:2011 SBP+I SRC & ASTM F2413-18 M
Category	Electric Hazard 18KV
Upper	High Quality Cow Suede Leather
Lining	Breathable Sandwich Air Mesh
Insock	Comfortable EVA Coated Mesh
Outsole	PU/PU Dual Density
Toe	Composite Toecap
Penetration	Kevlar Midsole Plate
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Camel
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	62 x 43 x 33 cms
CBM / Carton	0.0878
Packing / Carton	10 Pairs
Origin	China



**METAL FREE**


## Best Jogger/ L-7328

### Metal Free S1P SRC Suede Leather Shoe

Standard	CE EN ISO 20345:2011 S1P
Category	S1P SRC
Upper	Breathable Blue Cow Suede Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Composite Toe Cap to Resist 200 Joules Impact
Penetration	Kevlar Midsole Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Blue
Sizes	38-46
Weight / Carton	14.74 kgs
Carton Dimension	60 x 44 x 34 cms
CBM / Carton	0.08976
Packing / Carton	10 Pairs
Origin	China



## Best Sneaker/ L-7501

### S1P SRC Sports Shoe

Standard	CE EN ISO 20345:2011 S1P
Category	S1P SRC
Upper	Sanvlar-Tech Woven Fabric
Lining	Breathable Sandwich Air Mesh
Insock	Comfortable Mesh Coated EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK SGS lab (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black & Yellow
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	62 x 43 x 33 cms
CBM / Carton	0.08798
Packing / Carton	10 Pairs
Origin	China

**METAL FREE**


## Best Air / L-7331

### Metal Free S1P SRC Suede Leather

Standard	CE EN ISO 20345:2011 S1P SRC
Category	S1P SRC
Upper	Breathable Cow Suede Leather
Lining	Breathable Sandwich Air Mesh
Insock	Comfortable EVA Coated Mesh
Outsole	PU / PU Injection, Double Density
Toe	Composite Toe Cap to Resist 200 Joules Impact
Penetration	Kevlar Midsole Plate to Resist 1100 Newtons Puncture
Tested By	UK SGS UK Ltd (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	62 x 43 x 33 cms
CBM / Carton	0.0859
Packing / Carton	10 Pairs
Origin	China

**METAL FREE**


## Best Max / L-7389

### Metal Free Sanvlar-Tech Fly Knitting

Standard	CE EN ISO 20345:2011
Category	SBP SRC/ HRO
Upper	Sanvlar-Tech Fly Knitting Nylon Fabric
Lining	Breathable Sandwich Air Mesh
Insock	Comfortable EVA Coated Mesh
Outsole	EVA/Rubber Outsole can Pass 300°C HRO Test
Toe	Composite Toe Cap to Resist 200 Joules Impact
Penetration	Kevlar Midsole to Resist 1100 Newtons Puncture
Tested By	UK SGS lab (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	13 kgs
Carton Dimension	62 x 43 x 33 cms
CBM / Carton	0.0859
Packing / Carton	10 Pairs
Origin	China



### Best Worker/ M-8138

S1P SRC Leather Shoe	
Standard	CE EN ISO 20345:2011 S1P
Category	S1P SRC
Upper	Black Embossed Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	13.74 kgs
Carton Dimension	64 x 46.50 x 34 cms
CBM / Carton	0.10118
Packing / Carton	10 Pairs
Origin	China



### Best Boy/ M-8027

S3 SRC Leather Shoes	
Standard	CE EN ISO 20345:2011 S3
Category	S3 SRC
Upper	High Quality Embossed Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-Static & Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	15.96 kgs
Carton Dimension	61 x 44 x 34 cms
CBM / Carton	0.09200
Packing / Carton	10 Pairs
Origin	China



### Best Slip-on/ M-8025

S3 SRC Leather Shoes	
Standard	CE EN ISO 20345:2011 S3
Category	S3 SRC
Upper	Black Cow Smooth Leather
Lining	Breathable & Abrasion BK Mesh
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	15.78 kgs
Carton Dimension	62.50 x 49 x 36 cms
CBM / Carton	0.11025
Packing / Carton	10 Pairs
Origin	China



METAL FREE



### Best Climber/ M-8439

S1P SRC Leather Shoes	
Standard	CE EN ISO 20345:2011 S1P
Category	S1P
Upper	High Quality Suede Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Composite Toecap to Resist 200 Joules Impact
Penetration	Kevlar Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	14 kgs
Carton Dimension	64 x 45 x 35 cms
CBM / Carton	0.1008
Packing / Carton	10 Pairs
Origin	China



**METAL FREE**



## M-8356RB EH

### Electric Safety Work Boots (EH 18KV)

Standard	CE EN ISO 20345:2011 SBP SRC & ASTM F2413-18 M I/75 C/75 PR EH
Category	SBP SRC 18KV
Upper	Water Resistant Full Grain Cow Leather
Lining	Breathable Sandwich Air Mesh
Insock	Memory Foam Insole
Outsole	PU/Rubber Injection (HRO 300°)
Toe	Composite Toecap
Penetration	Kevlar Midsole Plate
Tested By	UK SGS lab (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	14 kgs
Carton Dimension	62 x 47 x 33 cms
CBM / Carton	0.0961
Packing / Carton	10 Pairs
Origin	China



## Best Hiker/ M-8179

### Classical Wedge Work Boots SBP SRC

Standard	CE EN ISO 20345:2011
Category	SBP SRC/ HRO
Upper	High Quality Crazy Horse Cow Leather
Lining	Breathable Sandwich Air Mesh
Insock	Comfortable EVA Coated Mesh
Outsole	Goodyear Welted Rubber Sole Can Pass 300°C HRO Test
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Midsole to Resist 1100 Newtons Puncture
Tested By	SGS UK Ltd (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Brown
Sizes	38-46
Weight / Carton	15 kgs
Carton Dimension	62 x 50 x 33 cms
CBM / Carton	0.1023
Packing / Carton	10 Pairs
Origin	China



## Best Lisa/ L-7508w

### S3 Ladies Safety Shoes S3 SRC

Standard	CE EN ISO 20345:2011 S3 SRC
Category	S3 SRC
Upper	High Quality Water Resistant Cow Leather
Lining	Breathable Sandwich Air Mesh
Insock	Memory Foam Insole
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK SGS lab (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	35-42
Weight / Carton	13 kgs
Carton Dimension	62 x 43 x 33 cms
CBM / Carton	0.0859
Packing / Carton	10 Pairs
Origin	China



## Best Welder/ H-9430

### S3 SRC Rigger Boot for Welding

Standard	CE EN ISO 20345:2011 S1P
Category	S3 SRC
Upper	Brown Cow Palm Embossed Leather
Lining	Breathable & Abrasion Sandwich
Insock	Anti-Static Breathable EVA
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body: 0362)
Warranty	6 Months Against Manufacturing Defects
Color	Brown
Sizes	38-46
Weight / Carton	20.54 kgs
Carton Dimension	72 x 66 x 37 cms
CBM / Carton	0.17582
Packing / Carton	10 Pairs
Origin	China





## Best Wellington/ W-6038

Heavy Duty Wellington Boots Black S5	
Standard	CE EN ISO 20345:2011 S5 SRC
Category	S5 SRC
Upper	High Quality PVC Material
Lining	Soft Fabric Mesh
Outsole	High Quality PVC Material
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Midsole Plate to Resist 1100 Newtons Puncture
Tested By	UK SGS UK Ltd (Approved body: 0120)
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	20 kgs
Carton Dimension	50 x 30 x 50 cms
CBM / Carton	0.075
Packing / Carton	10 Pairs
Origin	China



## Gumboot S3

Non-Safety Gum Boots with PVC Upper	
Standard	Meets EN 20345:2011
Features	<ul style="list-style-type: none"> <li>Non-Safety Gum Boots with PVC Upper, PVC Sole &amp; Antistatic Properties</li> <li>Upper: PVC</li> <li>Sole: PVC</li> <li>Toe: Non- Safety</li> <li>Sole: Non-Safety</li> <li>Size: 39 -46</li> <li>Classification: S3</li> <li>Flexible Material</li> <li>Comfortable &amp; Durable</li> <li>Gum Boot</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Agriculture</li> <li>Food</li> <li>Gardening</li> <li>Cleaning Services</li> </ul>
Sizes	39 -46
Weight / Carton	21 kgs
Carton Dimension	50 x 30 x 48 cms
CBM / Carton	0.007
Packing / Carton	10 pair
Origin	China



## Gumboot S5

Safety Gum Boots with PVC Upper	
Standard	Meets EN 20345:2011 Standard
Features	<ul style="list-style-type: none"> <li>Safety Gum Boots with PVC Upper, &amp; PVC/NBR Sole For Puncture, Abrasion &amp; Impact Protection</li> <li>Upper: PVC</li> <li>Sole: PVC</li> <li>Toe: Steel Plate</li> <li>Sole: Steel Plate</li> <li>Size: 39 -46</li> <li>Classification: S5</li> <li>Flexible Material</li> <li>Comfortable &amp; Durable</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Agriculture</li> <li>Food</li> <li>Gardening</li> <li>Cleaning Services</li> </ul>
Sizes	39 -46
Weight / Carton	23 kgs
Carton Dimension	40 x 40 x 48 cms
CBM / Carton	0.0077
Packing / Carton	10 pair
Origin	China



## Bulldozer

Fire Fighting Boot - BD9788	
Standard	CSA, CE Approved EN 345-2:1996
Feature	<ul style="list-style-type: none"> <li>Vulcanized Rubber Upper &amp; Sole</li> <li>Hypalon Lacquer Finishing</li> <li>Chemical Resistant</li> </ul>
Upper	Resistant Towards Mild Acids & Alkali
Sole	Resistant Towards Mild Acids
Sole Protection	<ul style="list-style-type: none"> <li>Black in Colour</li> <li>80% Chloroprene Rubber</li> <li>20% Nitrile Rubber</li> <li>Oil Resistant</li> </ul>
Steel Toe	<ul style="list-style-type: none"> <li>Meets EN 345</li> <li>Impact &amp; Compression</li> </ul>
Color	Black / Yellow
Sizes	38 - 46
Weight / Carton	19 kgs
Carton Dimension	42 x 42 x 42 cms
CBM / Carton	0.0741
Packing / Carton	6 Pairs
Origin	China



### TP-222L SBP/ MODEL 3

Shock Resistant, SBP, DDPU Sole

Standard	CE EN ISO 20345:2021 SBP
Category	SBP
Upper	Genuine Leather (Barton Print)
Lining	Grey Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap
Penetration	Steel Plate
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	12 kgs
Carton Dimension	63 × 40 × 33 cms
CBM / Carton	0.08316
Packing / Carton	10 Pairs
Origin	India



### TP-103 S1P/ MODEL S

Shock Resistant, S1P, DDPU Sole

Standard	CE EN ISO 20345:2021 S1P
Category	S1P
Upper	Genuine Leather (Barton Print)
Lining	Red Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	14.50 kgs
Carton Dimension	63 × 40 × 33 cms
CBM / Carton	0.08316
Packing / Carton	10 Pairs
Origin	India



### TP-1202 S1P/ MODEL X

Shock Resistant, S1P DDPU Sole

Standard	CE EN ISO 20345:2021 S1P
Category	S1P
Upper	FLYKNIT
Lining	Grey Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Composite Toe
Penetration	Kevlar Plate
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	15 kgs
Carton Dimension	65 x 48 x 35 cms
CBM / Carton	0.1092
Packing / Carton	10 Pairs
Origin	India



### TP-222H SBP MODEL 3

Shock Resistant, SBP, DDPU Sole

Standard	CE EN ISO 20345:2021 SBP
Category	SBP
Upper	Genuine Leather (Barton Print)
Lining	Grey Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap
Penetration	Steel Plate
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	12.50 kgs
Carton Dimension	63 × 40 × 33 cms
CBM / Carton	0.08316
Packing / Carton	10 Pairs
Origin	India

**Lancer**  
FOOTWEAR



### TP-109 S1P/ Model S

Shock Resistant, S1P, DDPU Sole	
Standard	CE EN ISO 20345:2021 S1P
Category	S1P
Upper	Genuine Leather (Barton Print)
Lining	Red Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	15 kgs
Carton Dimension	63 × 40 × 33 cms
CBM / Carton	0.08316
Packing / Carton	10 Pairs
Origin	India

**Lancer**  
FOOTWEAR



### TP-109 S3 Model S

Shock Resistant, S3, DDPU Sole	
Standard	CE EN ISO 20345:2011 S3 SRC
Category	S3
Upper	Genuine Leather (Barton Print)
Lining	Red Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	15 kgs
Carton Dimension	63 × 40 × 33 cms
CBM / Carton	0.08316
Packing / Carton	10 Pairs
Origin	India

**Lancer**  
FOOTWEAR



### TP-213 S1P/ Model Y

Shock Resistant, S1P DDPU Sole	
Standard	CE EN ISO 20345:2021 S1P
Category	S1P
Upper	Genuine Leather (Barton Print)
Lining	Beige Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toe
Penetration	Steel Plate
Warranty	6 Months Against Manufacturing Defects
Color	Black
Sizes	38-46
Weight / Carton	20 kgs
Carton Dimension	78 × 62 × 35 cms
CBM / Carton	0.16926
Packing / Carton	10 Pairs
Origin	India

**Lancer**  
FOOTWEAR



### TP-213 S1P/ Model Y

Shock Resistant, S1P, DDPU Sole	
Standard	CE EN ISO 20345:2021 S1P
Category	S1P
Upper	Genuine Leather (Barton Print)
Lining	Red Mesh
Insock	Foam Footbed
Outsole	PU / PU Injection, Double Density
Toe	Steel Toecap
Penetration	Steel Plate
Warranty	6 Months Against Manufacturing Defects
Color	Brown
Sizes	38-46
Weight / Carton	20 kgs
Carton Dimension	78 x 62 x 35 cms
CBM / Carton	0.16926
Packing / Carton	10 Pairs
Origin	India





**safetoe®**  
TOP QUALITY SINCE 1984

## Memory Foam

### Air-Cool Max Insole

<b>Features</b>	<ul style="list-style-type: none"> <li>Ventilation Fabric Mesh can Absorb 90% Sweat of Feet</li> <li>Super Density EVA Bottom Layer</li> <li>Design Fully Absorb Feet Pressure &amp; Provide Excellent Stability</li> <li>Full-Hole Design to Maintain Efficient Air Circulation Inside the Shoe</li> <li>Keep your Feet 360-Degree Ventilation</li> <li>U-Design Support Heel Can Disperse Human Weight Pressure &amp; Reduce Friction Between Feet &amp; Shoes</li> </ul>
<b>Suitable For</b>	<ul style="list-style-type: none"> <li>Sport Shoes</li> <li>Hiking Shoes</li> <li>Running Shoes</li> <li>Leather Shoes</li> <li>Safety Shoes etc.</li> </ul>
<b>Weight / Carton</b>	25 kgs
<b>Carton Dimension</b>	30 × 80 × 100 cms
<b>CBM / Carton</b>	0.24
<b>Packing / Carton</b>	500 Pairs
<b>Origin</b>	China



**safetoe®**  
TOP QUALITY SINCE 1984

## Bamboo Cotton Socks

### Bamboo Cotton Socks For Safety Shoes

<b>Standard</b>	FZ/T73001-2008
<b>Features</b>	<ul style="list-style-type: none"> <li>Natural Bamboo Cotton is</li> <li>Very Comfortable</li> <li>Itching</li> <li>Breathable</li> <li>Protect Foot</li> <li>Absorb Sweat</li> <li>Anti-Static</li> <li>Pilling Resistance</li> <li>Can Effectively Regulating the Nervous System</li> <li>Clear the Meridians</li> <li>Improve Life Quality</li> </ul>
<b>Ingredient</b>	<ul style="list-style-type: none"> <li>95% Cotton</li> <li>5% Spandex</li> </ul>
<b>Sizes</b>	37-42 43-47
<b>Category</b>	First Grade
<b>Weight / Carton</b>	23 kgs
<b>Carton Dimension</b>	66 × 47.5 × 34.5 cms
<b>CBM / Carton</b>	0.1082
<b>Packing / Carton</b>	420 Pairs
<b>Origin</b>	China



**EMPIRAL**

## PP Shoe Cover

### PP Shoe Cover

<b>Standard</b>	EN CAT 1
<b>Material</b>	PP Non-Woven
<b>Weight</b>	30 GSM
<b>Features</b>	<ul style="list-style-type: none"> <li>Extra Thick Provides Lasting Protection, Water Resistant</li> <li>Safe Guard Environment from Contamination</li> <li>Prevents Scuffs on Floor</li> <li>Enhances Traction While Walking</li> <li>Easy on/off Elasticated Shoe Cover</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>Hospital</li> <li>Janitorial</li> <li>Clean Room</li> <li>Industrial</li> <li>Pharmaceutical Facility</li> </ul>
<b>Color</b>	Blue
<b>Sizes</b>	15 x 40 cm
<b>Weight / Carton</b>	4.60 kgs
<b>Carton Dimension</b>	40 x 27 x 28 cms
<b>CBM / Carton</b>	0.03
<b>Packing / Carton</b>	10 Packets (1000 Pieces)
<b>Origin</b>	China



**EMPIRAL**

## PE Shoe Cover

### PE (Polyethylene) Shoe Cover

<b>Standard</b>	EN Cat. I
<b>Material</b>	PE (PolyEthylene)
<b>Weight</b>	2.3grams
<b>Size</b>	15 x 41cm
<b>Features</b>	<ul style="list-style-type: none"> <li>Extra Thick Provides Lasting Protection, Water Resistant</li> <li>Safe Guard Environment from Contamination</li> <li>Prevents Scuffs on Floor</li> <li>Enhances Traction While Walking</li> <li>Easy on/off Elasticated Shoe Cover</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>Hospital</li> <li>Janitorial</li> <li>Clean Room</li> <li>Industrial</li> <li>Pharmaceutical Facility</li> </ul>
<b>Color</b>	Blue
<b>Sizes</b>	15x 41cm
<b>Weight / Carton</b>	4.6 kgs
<b>Carton Dimension</b>	40 × 27 × 28 cms
<b>CBM / Carton</b>	0.0302
<b>Packing / Carton</b>	10 Pkts
<b>Origin</b>	China

# FIRE PROTECTION





### Flash Small

Fire Blanket (1.2 m x 1.2 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	25 Pieces
Origin	China
Size	1.2 Metres x 1.2 Metres (4 feet X 4 feet)



### Flash Medium

Fire Blanket (1.2 m x 1.8 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	39 x 37 x 23 cms
CBM / Carton	0.033
Packing / Carton	20 Pieces
Origin	China
Size	1.2 Metres x 1.8 Metres (4 feet X 6 feet)



### Flash Large

Fire Blanket (1.8 m x 1.8 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	25.30 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	15 Pieces
Origin	China
Size	1.8 Metres x 1.8 Metres (6 feet X 6 feet)





### Flash Small PVC Box

Fire Blanket (1.2 m x 1.2 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	20 Pieces
Origin	China
Size	1.2 Metres x 1.2 Metres (4 feet X 4 feet)



### Flash Medium PVC Box

Fire Blanket (1.2 m x 1.8 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	35 x 24 x 38 cms
CBM / Carton	0.0319
Packing / Carton	10 Pieces
Origin	China
Size	1.2 Metres x 1.8 Metres (4 feet X 6 feet)



### Flash Large PVC Box

Fire Blanket (1.8 m x 1.8 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Fire Escape, Wrap the Fire Blanket &amp; Escape from the Scene</li> <li>• Effectively Reduce the High Temperature as a Result of Fire</li> <li>• Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket</li> <li>• To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.</li> </ul>
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	25.30 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	10 Pieces
Origin	China
Size	1.8 Metres x 1.8 Metres (6 feet X 6 feet)



### Flash 0.4 mm

Fire Roll Made of Fiber Glass Woven Fabric	
Standard	CE AS/NZS 3504-2006
Thickness	0.4mm
Weight	840gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Industrial Safety</li> <li>• Steel Mills</li> <li>• Electric Arc Welding Process</li> <li>• Boiler Room Spark</li> <li>• Welding Application</li> </ul>
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	43.50 kgs
Carton Dimension	105 x 25 x 25 cms
CBM / Carton	0.0656
Packing / Carton	1 Roll
Origin	China
Size	1 Metre Width x 100 Metres Roll Length



### Flash 0.8 mm

Fire Roll Made of Fiber Glass Woven Fabric	
Standard	CE AS/NZS 3504-2006
Thickness	0.8mm
Weight	840gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Industrial Safety</li> <li>• Steel Mills</li> <li>• Electric Arc Welding Process</li> <li>• Boiler Room Spark</li> <li>• Welding Application</li> </ul>
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	42 kgs
Carton Dimension	103 x 24 x 24 cms
CBM / Carton	0.0593
Packing / Carton	1 Roll
Origin	China
Size	(1 Metre Width X 50 Metres Roll Length)



### Flash 1.6 mm

Fire Roll Made of Fiber Glass Woven Fabric	
Standard	CE AS/NZS 3504-2006
Thickness	1.6mm
Weight	840gm/m <sup>2</sup>
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	<ul style="list-style-type: none"> <li>• Industrial Safety</li> <li>• Steel Mills</li> <li>• Electric Arc Welding Process</li> <li>• Boiler Room Spark</li> <li>• Welding Application</li> </ul>
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	43.50 kgs
Carton Dimension	104 x 24 x 25 cms
CBM / Carton	0.062
Packing / Carton	1 Roll
Origin	China
Size	(1 Metre Width X 25 Metres Roll Length)

# EMERGENCY FIRST AID



**Matsuda**



**RELIANCE MEDICAL**  
*'Leading First Aid'*

**plum**  
+ Emergency Eye Wash





## Matsuda P150

### Portable Eye Washer, 9-Gallon


Standard	EN 15154-4:2009
Application	<ul style="list-style-type: none"> <li>Self-Contained 9-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads</li> <li>The Unit Delivers Over Six Gallons (22.5 Liters) of Water for Fifteen Minutes &amp; is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas</li> </ul>
Tank	<ul style="list-style-type: none"> <li>9-gallon Capacity Safety Yellow Polyethylene Tank</li> <li>Tank has Handles on Top &amp; Side to Allow for Easy Handling</li> <li>A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, &amp; Filling</li> </ul>
Operation	<ul style="list-style-type: none"> <li>Water Flow is Activated By Pulling Down the Yellow Eyewash Tray</li> <li>Integral Full Flow Nozzles Deliver A Soft Spray of Water</li> <li>Swing Tray Up To A Storage Position to Stop the Flow</li> </ul>
Drain	<ul style="list-style-type: none"> <li>Wastewater is Directed to Discharge Into the Floor Drain</li> <li>A Storage Tank or Other Receptor Could Be Used to Collect Waste Water to Avoid Pollution (Not Included)</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>Stainless Steel Bracket for A Mounting Unit on the Wall</li> <li>The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces</li> </ul>
Discharge Time	15 Minutes (Minimum) At the Flow Rate of 1.5l/Minutes (Minimum)
Origin	China



## Matsuda P100

### Portable Eye Washer, 16-Gallon

Standard	EN 15154-4:2009
Application	<ul style="list-style-type: none"> <li>Self-Contained 16-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads</li> <li>The Unit Delivers Over Seven Gallons (26 Liters) of Water for Fifteen Minutes &amp; is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas</li> </ul>
Tank	<ul style="list-style-type: none"> <li>16-Gallon Capacity Safety Yellow Polyethylene Tank</li> <li>Tank has Handles on Top &amp; Side to Allow for Easy Handling</li> <li>A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, &amp; Filling</li> </ul>
Operation	<ul style="list-style-type: none"> <li>Water Flow is Activated By Pulling Down the Yellow Eyewash Tray</li> <li>Integral Full Flow Nozzles Deliver A Soft Spray of Water</li> <li>Swing Tray Up To A Storage Position to Stop the Flow</li> </ul>
Drain	<ul style="list-style-type: none"> <li>Wastewater is Directed Into the Drain Opening in the Tank Basin, 3 Ft Long Drain Hose in Basin Directs Discharge into A Floor Drain, Storage Tank, or Other</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>Stainless Steel Bracket for A Mounting Unit on the Wall</li> <li>The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces</li> </ul>
Discharge Time	15 Minutes (Minimum) At the Flow Rate of 1.5l/Minutes (Minimum)
Origin	China

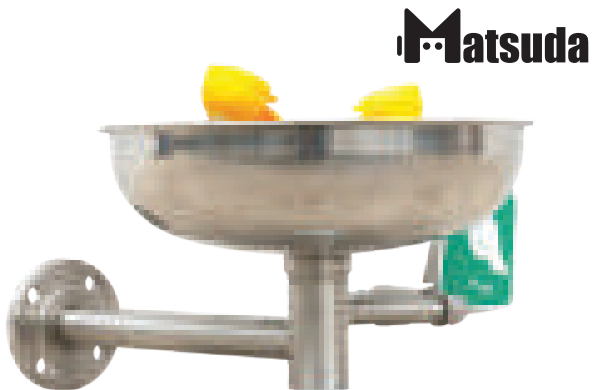

Matsuda SS-B100

Wall Mounted Eye Washer, SS	
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"><li>Controlled, Low Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to User</li><li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li><li>Protect Spray Heads from Airborne Contaminants</li><li>Valve Actuator Are Easy to Locate &amp; Readily Accessible to User</li><li>Hands-Free Stay Open Valve Activate Within One Second</li><li>Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM</li><li>Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, &amp; Filter to Remove Impurities from the Water Flow</li><li>1/2" IPS Stainless Steel Stay-Open ball valve</li><li>The Valve is Activated By a Flag Handle</li><li>The Unit Remains in Operation Until the Handle is Returned to the Closed Position</li><li>11-1/2" Diameter. Bowl is Stainless Steel</li></ul>
Application	<ul style="list-style-type: none"><li>Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency</li><li>Quickly Cleaning the Deleterious Material Attached to the Eyes</li></ul>
Origin	China



Matsuda SS-E100

Eye Washer, SS	
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"><li>Controlled, Low Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to User</li><li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li><li>Protect Spray Heads from Airborne Contaminants</li><li>Valve Actuator Are Easy to Locate &amp; Readily Accessible to User</li><li>Hands-Free Stay Open Valve Activate Within One Second</li><li>Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM</li><li>Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, &amp; Filter to Remove Impurities From the Water Flow</li><li>1/2" 304 Stainless Steel Stay-Open Ball Valve</li><li>The Unit Remains In Operation Until the Handle is Returned to the Closed Position</li><li>11-1/2" Diameter. Bowl Is Stainless Steel</li><li>Schedule 1-1/4" &amp; 1/2" Stainless Steel</li></ul>
Application	<ul style="list-style-type: none"><li>Free-standing, Pedestal Mounted Eye/Face Wash</li><li>Water Flow Is Activated By Either a Flag Handle or a Foot Treadle</li></ul>
Origin	China



Matsuda SS-S100

Safety Shower & Eye Washer, SS	
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"><li>Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously</li><li>Shower Can Provide 76 Liters of Water Per Minute</li><li>Center of The Water Pattern 16" from Any Obstructions</li><li>Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter</li><li>Ball Valve Activates Within One Second</li><li>Easily Located, Accessible Actuator No Higher Than 69"</li><li>Controlled, Low-Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to the User</li><li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li><li>Protect Spray Heads from Airborne</li></ul>
Application	<ul style="list-style-type: none"><li>The Shower is Activated By A Pull Rod &amp; Eyewash is Activated By A Flag Handle or Foot Treadle</li><li>Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes</li></ul>
Origin	China



### Matsuda B100

#### Wall Mounted Eye Washer, GI

Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"> <li>Controlled, Low Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to User</li> <li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li> <li>Protect Spray Heads from Airborne Contaminants</li> <li>Valve Actuator Are Easy to Locate &amp; Readily Accessible to User</li> <li>Hands-Free Stay Open Valve Activate Within One Second</li> <li>Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM</li> <li>Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, &amp; Filter to Remove Impurities from the Water Flow</li> <li>1/2" Stainless Steel Stay-Open Ball Valve</li> <li>The Valve is Activated By a Flag Handle</li> <li>The Unit Remains in Operation Until the Handle is Returned to the Closed Position</li> <li>11-1/2" Diameter. Bowl is ABS plastic</li> </ul>
Application	<ul style="list-style-type: none"> <li>Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency</li> <li>Quickly Cleaning the Deleterious Material Attached to the Eyes</li> </ul>
Origin	China



### Matsuda E100

#### Eye Washer, GI

Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"> <li>Controlled, Low Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to User</li> <li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li> <li>Protect Spray Heads from Airborne Contaminants</li> <li>Valve Actuator Are Easy to Locate &amp; Readily Accessible to User</li> <li>Hands-Free Stay Open Valve Activate Within One Second</li> <li>Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM</li> <li>Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, &amp; Filter to Remove Impurities from the Water Flow</li> <li>1/2" Stainless Steel Stay-Open Ball Valve</li> <li>The Unit Remains in Operation Until the Handle is Returned to the Closed Position</li> <li>Supply: 1/2" NPT Male Inlet</li> <li>Waste: 1-1/4"NPT Female Outlet</li> </ul>
Application	<ul style="list-style-type: none"> <li>Free-standing, Pedestal Mounted Eye/Face Wash</li> <li>Water Flow Is Activated By Either a Flag Handle or a Foot Treadle</li> </ul>
Origin	China



### Matsuda S100

#### Safety Shower & Eye Washer, GI

Standard	EN 15154-1:2006 EN 15154-2:2006
Features	<ul style="list-style-type: none"> <li>Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously</li> <li>Shower Can Provide 76 Liters of Water Per Minute</li> <li>Center of The Water Pattern 16" from Any Obstructions</li> <li>Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter</li> <li>Ball Valve Activates Within One Second</li> <li>Easily Located, Accessible Actuator No Higher Than 69"</li> <li>Controlled, Low-Velocity Flow Completely Rinses Eyes &amp; Face is Not Injurious to the User</li> <li>Eye Washer Unit Deliver 11.5 Liters of Water Per Minute</li> <li>Protect Spray Heads from Airborne</li> </ul>
Application	<ul style="list-style-type: none"> <li>The Shower is Activated By A Pull Rod &amp; Eyewash is Activated By A Flag Handle or Foot Treadle</li> <li>Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes</li> </ul>
Origin	China



**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-900

### Reliwash Saline Eye Wash 500ml

Description	<ul style="list-style-type: none"> <li>• Mandatory Under HSE Regulations Sterile Safe &amp; Non-Toxic Twist-Seal Cap</li> <li>• Sodium Chloride 0.9%w/v Ph.Eur</li> </ul>
Origin	UK

**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-904

### Double Eye Wash Station in Aura Box

Description	<ul style="list-style-type: none"> <li>• Contents: 2pcs 500ml Saline Eye Wash</li> <li>• 2 No.16 Eyepad Dressing</li> <li>• Standard Aura 27.5cmH x 27cmW x 9.5cmD</li> </ul>
Origin	UK

**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-906

### Eyewash Station with Content

Description	<ul style="list-style-type: none"> <li>• Green High Visibility</li> <li>• Eye Wash Station</li> <li>• Holds Two 500ml Sterile</li> <li>• Saline Solution Bottles</li> <li>• 2 Eye Pad Dressings</li> </ul>
Origin	UK

**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-2990

### Eyewash Bottle 500ml with Eyebath Cap

Description	<ul style="list-style-type: none"> <li>• Sodium Chloride 0.9% w/v Ph.Eur.</li> <li>• Available In 500ml Bottle Suitable For Boxed</li> <li>• First Aid Kits.</li> </ul>
Origin	UK

**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-919/F17899

### Premier Eyewash Station

Description	<ul style="list-style-type: none"> <li>• Eye Wash Station Contents:</li> <li>• 2 Eye Pad Dressings</li> <li>• 2 Eye Wash 500ml Bottles</li> <li>• 5 Eye Wash 20ml Pods</li> <li>• 1 Mirror</li> </ul>
Origin	UK

**RELIANCE MEDICAL**  
'Leading First Aid'



## EW-955

### Eyewash Station Deluxe Complete

Description	<ul style="list-style-type: none"> <li>• Content:</li> <li>• 2 Eye Pad Dressings</li> <li>• 2 Eye Wash 500ml Bottles</li> <li>• 1 Bracket</li> </ul>
Origin	UK

**plum**  
+Emergency Eye Wash



## Eye Wash Box

### Wall Mounted Eyewash Station

Description	<ul style="list-style-type: none"> <li>• Visible &amp; Readily Available</li> <li>• Easily Mounted on The Wall Close To The Workplace &amp;</li> <li>• Immediate Washing May Be Needed</li> </ul>
Origin	UK

**plum**  
+Emergency Eye Wash



## Eye Wash Station

### High-Density Green Polyethylene Tank

Description	<ul style="list-style-type: none"> <li>• Visible &amp; Readily Available</li> <li>• Easily Mounted on The Wall Close To The Workplace &amp;</li> <li>• Immediate Washing May Be Needed</li> </ul>
Origin	UK



### FAW5 (Micro Kit)

#### First Aid Kit (Upto 5 Persons)

##### Description

- Especially Designed for Travel Use
- With Its Mini Size, It is Fairly Handy When you Take Care of Small Medical Treatment

Origin China



### FAW10 (Auto Kit)

#### First Aid Kit (Upto 10 Persons)

##### Description

- Perfect for Auto, Home & Office Use
- The Kit is Roomy, Durable, Easy to Carry & Simple to Open

Origin China



### FAWB25 (Team Kit)

#### First Aid Kit (upto 25 Persons)

##### Description

- Cleaning & Covering Small Wounds, Removing Ticks & Other Embedded Objects
- This is The Perfect Kit to Keep in Your Car

Origin China



### FAG25 (Office Kit)

#### First Aid Kit (upto 25 Persons)

##### Description

- Made of Strong ABS Plastic Which is Shiny, Smooth & Easy to Clean
- Contains Neoprene Seal Which Makes it Dust-Proof

Origin China



### FAO50 (Sports Plus Kit)

#### First Aid Kit (Upto 50 Persons)

##### Description

- Made of Strong ABS Plastic Which is Shiny & Easy to Clean
- A Neoprene Seal is Fitted to Make The Kit Dust-Proof

Origin China



### FAW50 (Industry Kit)

#### First Aid Kit (Upto 50 Persons)

##### Description

- High Class Metal Design in White Color with Three Compartment
- It is Recommended for Industrial Companies, Hotels

Origin China



### FA100 (Workplace Kit)

#### First Aid Kit (Upto 100 Persons)

##### Description

- Made of Strong ABS Plastic Which is Shiny & Easy to Clean
- A Neoprene Seal is Fitted to Make The Kit Dust-Proof

Origin China



### Burn Kit

#### First Aid Kit with Bracket

##### Description

- Burn First Aid Kit is a Vital Product for Burn Injuries
- The Contents are Apt for Small Burns & The Box Comes With The Brackets

Origin China



# GAS DETECTOR







## BW C2-H H2S

H2S Personal Monitor, 24 Months	
Standard	UL Class 1/ATEX/IECEX/CE
Size	2.8 x 5.0 x 8.6 cms
Weight	92 g
Features	<ul style="list-style-type: none"> <li>• Detector Complete With Specified Sensor</li> <li>• Stainless Steel Alligator Clip &amp; Concussion-Proof Housing</li> <li>• Test Cap, Instructions</li> </ul>
Weight / Carton	1.55 kgs
Carton Dimension	31 x 17 x 14 cms
CBM / Carton	0.0007
Packing / Carton	10 Pieces
Origin	Mexico



## BW C3-H H2S

H2S Personal Monitor, 36 Months	
Standard	UL Class 1/ATEX/IECEX/CE
Size	2.8 x 5.0 x 8.6 cms
Weight	92 g
Features	<ul style="list-style-type: none"> <li>• Detector Complete With Specified Sensor</li> <li>• Stainless Steel Alligator Clip &amp; Concussion-Proof Housing</li> <li>• Test Cap, Instructions</li> </ul>
Weight / Carton	1.55 kgs
Carton Dimension	31 x 17 x 14 cms
CBM / Carton	0.0007
Packing / Carton	10 Pieces
Origin	Mexico



## BW MICRO CLIP XL

Multi-Gas Detector Micro Clip XL	
Standard	EMI/RFI: Complies with EMC Directive 89/336/EEC IP 66/67
Approvals	ATEX: II 1 G, Ex ia IIC T4 Ga
Size	11.3 x 6.0 x 2.9 cms
Weight	171 g
Features	<ul style="list-style-type: none"> <li>• Choose The GasAlertMicroClip XL for Cold Weather Performance</li> <li>• Intelliflash™ Verifies Operation &amp; Compliance to Both the User &amp; Supervisor</li> <li>• Tamper-proof, One Button Operation</li> <li>• Powered By a Rechargeable Lithium Polymer Battery</li> <li>• Monitors H2S Co, O2 &amp; LEL</li> <li>• Compatible With Microdock II Quick Specs</li> </ul>
Packing / Carton	1 Piece
Origin	Mexico



## BW MAX XT II

Multi-Gas Detector MAX XT II	
Standard	EMI/RFI: Complies with EMC Directive 2004/108/EC IP66/67
Approvals	ATEX: II 1 G Ga Ex ia IIC T4
Size	13.1 x 7.0 x 5.2 cms
Weight	328 g
Features	<ul style="list-style-type: none"> <li>• Continuous LCD Shows Real Time Gas Concentrations</li> <li>• Water-Resistant</li> <li>• Simple Automatic Calibration Procedure; Compatible with Bw Microdock II Automatic Test &amp; Calibration Station</li> <li>• Full Function Self-Test of Sensor, Battery Status, Circuit</li> <li>• Integrity &amp; Audible/Visual Alarms on Start Up</li> <li>• Bright Visual Alarm Bars</li> <li>• Built-in Concussion-Proof Boot</li> <li>• Monitors H2S, CO, O2 &amp; LEL</li> </ul>
Packing / Carton	1 Piece
Origin	Mexico

# SPILL KIT





Spill Kit Bin with Wheel (30, 60 Gallon)

OIL SPILL KIT		Oil Spill Kit Contents				
		5 Gallons	10 Gallons	20 Gallons	30 Gallons	60 Gallons
Contents	Origin					
Sorbent Pad, EP100, 15"x18"	USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
WSOC440 White Oil-Only Socks 3" dia X 4'	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
WPIL818 White Oil-Only Pillows 8" X 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin



Spill Kit Bag (5, 10 Gallon)

Spill Kit Bin with Pedal (20 Gallon)

CHEMICAL SPILL KIT		Chemical Spill Kit Contents				
		5 Gallons	10 Gallons	20 Gallons	30 Gallons	60 Gallons
Contents	Origin					
BYP100S Yellow Chemical Light Weight MeltBlown Pads 20"L x 16"W	USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
YSOC440 3" X 4' Yellow Chemical Socks	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
YPIL818 Yellow Chemical Pillows 8" x 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin





3M



### 3M SS Cleaner & Polish

Stainless Steel Cleaner & Polish, 21 oz Aerosol	
Standard	NSF A-7 Registered
Features	<ul style="list-style-type: none"><li>• Cleans &amp; Polishes in One Step</li><li>• Leaves No Greasy Build-up on Surfaces</li><li>• Pleasant Citrus Fragrance</li><li>• Resists Streaking</li><li>• NSF® Certified for Use in Federally-Inspected Meat &amp; Poultry Processing Plants</li></ul>
Applications	<ul style="list-style-type: none"><li>• Stainless Steel, Chrome</li><li>• Architectural Aluminum</li><li>• Other Interior Metal Surfaces</li><li>• Appliances, Bathrooms</li><li>• Fixtures/Equipment, Fryers, Griddles</li><li>• Grills, Hoods, Kitchens/Dining</li></ul>
Weight / Carton	9.43 Kgs
Carton Dimension	31 x 24 x 24 cms
CBM / Carton	0.01786
Packing / Carton	12 Bottles
Origin	USA



### Scaffolding Tags

Danger Tag	
Features	<ul style="list-style-type: none"><li>• Insert in Each Holder 2 Pcs Marking Pen</li><li>• UV Resistant</li><li>• Impact Resistant</li><li>• Safety Approved</li><li>• Background Color: White</li><li>• Legend Style: Text</li><li>• Legend Color: Red</li><li>• Header: Danger</li></ul>
Applications	<ul style="list-style-type: none"><li>• Construction Industry Work on Scaffolds Frequently</li><li>• From Steel Erectors to Building Equipment Installers, Bricklayers, Window Washers Carpenters &amp; Painters</li></ul>
Weight / Carton	8.57 kgs
Carton Dimension	34 x 22 x 34 cms
CBM / Carton	0.0254
Packing / Carton	10 Packets
Packing / Packet	10 Holders + 20 Tags + 2 Marking Pens
Origin	India / China



## Kit Arc 4 Power

Arc Flash Kit "Power", HRC 4, 41.0 cal/cm<sup>2</sup>, Class 2, 12 oz/yd<sup>2</sup>

Standard	<p>ASTM F2178, ATPV: 40.0 cal/cm<sup>2</sup>            DGVV GS-ET-29, APC 2 (class 2)            W(LBP)= 630 kJ            EN 166 with CE-labelling            IEC 61482-1-1: ASTM F1959, ATPV: 41,0 cal/cm<sup>2</sup>            EN ISO 11612:2015 A1/B1/C1/F1            EN ISO 11611:2015 class 2-A1            EN 31092 / ISO 11092: RET= 7,10 m<sup>2</sup> Pa/W            EN ISO 15797</p>
Features	<ul style="list-style-type: none"> <li>• Arc Flash Hood with Integrated Hard Hat &amp; Bracket Tested According to ASTM F2178, ATPV: 40.0 cal/cm<sup>2</sup></li> <li>• Arc Flash Tested According to DGVV GS-ET-29, APC 2 (class 2)</li> <li>• Additional Tested with a Higher Test Level W(LBP)= 630 kJ</li> <li>• EN 166 "personal Eye-protection Requirements" with CE-Labeling</li> <li>• Jacket &amp; Dungarees Arc Flash Tested According to IEC 61482-1-1: ASTM F1959, ATPV: 41,0 cal/cm<sup>2</sup></li> <li>• Jacket &amp; Dungarees Arc Flash Tested to IEC 61482-1-2, class 2</li> <li>• Heat &amp; Flame Protection According to EN ISO 11612:2015 A1/B1/C1/F1</li> <li>• Welding Protection According to EN ISO 11611:2015 class 2-A1</li> <li>• Extreme Breathable According to EN 31092 / ISO 11092: RET= 7,10 m<sup>2</sup> Pa/W for the Highest Arc Flash Protection</li> <li>• Clothing Industry Washing Suitable According to EN ISO 15797</li> <li>• Ultra-light Grammage: 410g/m<sup>2</sup> (12 oz.yd<sup>2</sup>)</li> <li>• Outer Layer 240 g/m<sup>2</sup>, 75% Aramid (Nomex®), 13% Modacrylic, 10.5% Cotton, 1.5% Antistatic Component</li> <li>• Inner Layer 170 g/m<sup>2</sup>, 100% Aramid (Nomex®)</li> <li>• Bag to Transport And Storage the KIT</li> </ul>
Color	Grey Blue
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany





### Arc Flash Jacket, 41.0cal/cm<sup>2</sup>

Arc Flash Jacket "Power", HRC 4, 41.0 cal/cm<sup>2</sup>, Class 2, 12 oz/yd<sup>2</sup>

Standard	IEC 61482-2:2018 (Class 2) DIN EN ISO 11611:2015 Class 2 A1+A2 DIN EN ISO 11612:2015 (A1+A2/B1/C1/F1)
Features	<ul style="list-style-type: none"> <li>• High Wearing Comfort Through Ultralow Weight, 410 g/m<sup>2</sup> / 12 oz/yd<sup>2</sup></li> <li>• Yarn Dyeing, No Leaching of the Textile Fabric</li> <li>• Good Moisture Regulation &amp; Extremely Breathable, RET-Value According EN 31092 / ISO 11092: 7.1 m<sup>2</sup> PA/W</li> <li>• Mixed Fabric Aramid (Nomex®), Modacryl, Cotton &amp; Antistatic Components</li> <li>• Can be Used Together with Bsd HRC 4 Gloves &amp; BSD Power Hood as Switching Kit</li> </ul>
Color	Dark Blue
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### Arc Flash Bib Coverall, 41.0cal/cm<sup>2</sup>

Arc Flash Bib Coverall "Power", HRC 4, 41.0 cal/cm<sup>2</sup>, Class 2

Standard	IEC 61482-2:2018 (Class 2) DIN EN ISO 11611:2015 Class 2 A1+A2 DIN EN ISO 11612:2015 (A1+A2/B1/C1/F1)
Features	<ul style="list-style-type: none"> <li>• High Wearing Comfort Through Ultralow Weight, 410 g/m<sup>2</sup> / 12 oz/yd<sup>2</sup></li> <li>• Yarn Dyeing, No Leaching of the Textile Fabric</li> <li>• Good Moisture Regulation &amp; Extremely Breathable, RET-Value According EN 31092 / ISO 11092: 7.1 m<sup>2</sup> PA/W</li> <li>• Mixed Fabric Aramid (Nomex®), Modacryl, Cotton &amp; Antistatic Components</li> <li>• Can be Used Together with BSD HRC 4 Gloves &amp; BSD Power Hood as Switching Kit</li> </ul>
Color	Dark Blue
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany





### Balaclava ATPV: 34.0 cal/cm<sup>2</sup>

ATPV: 34.0 cal/cm<sup>2</sup>, Double Layer Fabric 7.8 oz/yd<sup>2</sup>

Standard	ASTM F1959 Certificate of Conformity PPE Regulation (EU) 2016/425
Features	<ul style="list-style-type: none"> <li>• Arc Flash Tested According to ASTM F1959, ATPV: 34.0 cal/cm<sup>2</sup></li> <li>• For Wearing Under Face Shields</li> <li>• For A Higher Arc Flash Protection of the Head</li> <li>• Double Layer Fabric: 7.8 oz/yd<sup>2</sup></li> <li>• Universal-Size</li> </ul>
Color	Dark Blue
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### Arc Protection Hood Arc 4 Power

ATPV: 40.0 cal/cm<sup>2</sup>, Double Layer Fabric 7.8 oz/yd<sup>2</sup>, Arc Protection Balaclava

Standard	IEC 61482-1-1: ASTM F2178, ATPV: 40.0 cal/cm <sup>2</sup> DGUV GS-ET-29, APC 2 (class 2) W(LBP)= 630 kJ
Features	<ul style="list-style-type: none"> <li>• Arc-flash-tested According to IEC 61482-1-1: ASTM F2178, ATPV: 40.0 cal/cm<sup>2</sup></li> <li>• Arc Flash Tested According to DGUV GS-ET-29, APC 2 (class 2)</li> <li>• Additional Tested with a Higher Test Level W(LBP)= 630 kJ</li> <li>• EN 166 "personal Eye-Protection Requirements" with CE-Labeling</li> <li>• Ultra-Light Grammage 410 g/m<sup>2</sup> (12 oz.yd<sup>2</sup>)</li> <li>• True Color Visor</li> <li>• For The Highest Arc Flash Protection with Integrated Hard Hat &amp; Bracket</li> <li>• Universal-Size</li> </ul>
Color	Dark Blue
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



## ErgoS<sub>Intec plus</sub>, 14 cal/cm<sup>2</sup>

Class2, HRC2, 14Cal/cm<sup>2</sup>, Helmet with integrated Face Shield

Standard	ASTM F2178 -17 b ANSI/ISEA Z89.1 Class E DIN EN 166: 2001 DIN EN 170: 2002 DGUV GS-ET-29: 2011 EN 397:2012+A1:2012 EN 50365:2002 Certificate of Conformity PPE Regulation (EU) 2016/425 Marking Helmet BSD -40°C, 440 Vac MM, LD Klasse 0 CE 1437 ANSI/ISEA Z89.1 Class E Marking Visor 2C-2 BSD 1 B 8-2-2 N 3
Features	<ul style="list-style-type: none"> <li>Electrician Face Shield with Integrated Visor &amp; the Real View Technology by BSD. The Visor Can be Pushed into the Hard Hat When not in Use.</li> <li>Electric Arc Tested According to DGUV GS-ET-29, class 2 (APC 2)</li> <li>Electric arc tested according to ASTM F2178, 14.0 cal/cm<sup>2</sup></li> <li>Visor EN 166, EN 170 &amp; ANSI/ISEA Z87.1</li> <li>Hard Hat EN 397, EN 50365 (Class 0) &amp; ANSI/ISEA Z89.1</li> <li>Real View Technology by BSD</li> <li>Color Reproduction Index &gt; 95 %, Visor has no Aging</li> <li>Permanent Anti-Fog Protection</li> <li>Available Accessory: Ear-Defender, Hard Hat Lamp</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Substations</li> <li>Utilities Power Generators</li> <li>Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



## ErgoS<sub>Intec power</sub>, 28 cal/cm<sup>2</sup>

Class2, HRC3, 28Cal/cm<sup>2</sup>, Helmet with Integrated Face Shield

Standard	ASTM F2178 ANSI/ISEA Z89.1 Class E DIN EN 166: 2001 DIN EN 170: 2002 EN 397:2012+A1:2012 EN 50365:2002 Certificate of Conformity PPE Regulation (EU) 2016/425 Marking Helmet BSD -40°C, 440 Vac MM, LD Klasse 0 1437 ANSI/ISEA Z89.1 Class E Marking Visor 2C-2 BSD 1 B N 166
Features	<ul style="list-style-type: none"> <li>Electric arc Tested According to ASTM F2178, 28.0 cal/cm<sup>2</sup></li> <li>Visor EN 166, EN 170 &amp; ANSI/ISEA Z87.1</li> <li>Hard Hat EN 397, EN 50365 (class 0) &amp; ANSI/ISEA Z89.1</li> <li>Real View Technology by BSD</li> <li>Color Reproduction Index &gt;95%, visor has no Aging</li> <li>Permanent Anti-Fog Protection</li> <li>Available Accessory: Ear-Defender, Hard Hat Lamp</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Substations</li> <li>Utilities Power Generators</li> <li>Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### ErgoS<sub>plus</sub>, 10.7 cal/cm<sup>2</sup>

#### Face Shield, Class 2, HRC 2, 10.7 cal/cm<sup>2</sup>, Uni

Standard	DIN EN 166: 2001, DIN EN 170: 2002 DGUV GS-ET-29: 2010 ASTM F2178 Certificate of Compliance ANSI / ISEA Z.87.1-2010 Certificate of Conformity EU Directive 89/686/EWG Marking visor carrier BSD 166 8 F Marking visor 1000 V, CE 1883 2C-2 BSD 1 B 8-2-2, ATPV 10.7 cal/cm <sup>2</sup>
Features	<ul style="list-style-type: none"> <li>• Arc flash tested according to ASTM F2178, ATPV: 10.7 cal/cm<sup>2</sup></li> <li>• EN 166, "personal eye-protection requirement"</li> <li>• ANSI / ISEA Z87.1 - 2010</li> <li>• True color visor, through not tinted visor &gt; 95%</li> <li>• Useful life up to 10 years</li> <li>• Tested according to DGUV GS-ET-29, class 2</li> <li>• 318 kJ</li> <li>• Universal-bracket matching on common</li> <li>• electrician hard hats</li> <li>• Slot-bracket suitable for all hard hats with 30 mm Euro-slots</li> <li>• Brackets for other hard hats on request</li> <li>• Delivery with anti-fog protective spray</li> </ul>
Applications	Substations • Utilities Power Generators • Industrial electrical maintenance & installations
Origin	Germany



### ErgoS 2<sub>power</sub>, 26.0 cal/cm<sup>2</sup>

#### Arc Flash Face Shield "ErgoS 2power" HRC 3

Standard	DIN EN 166: 2001, DIN EN 170: 2002 DGUV GS-ET-29: 2010 ASTM F2178 Certificate of Compliance ANSI / ISEA Z.87.1-2010 Certificate of Conformity EU Directive 89/686/EWG Marking Visor Carrier BSD 166 8 F, Marking Visor 1000 V, CE 1883 2C-2 BSD 1 B 8-2-2 ATPV 26.0 cal/cm <sup>2</sup>
Features	<ul style="list-style-type: none"> <li>• Arc Flash Tested According to ASTM F2178, ATPV: 10.7 cal/cm<sup>2</sup></li> <li>• EN166, "Personal Eye-Protection Requirement"</li> <li>• ANSI / ISEA Z87.1 - 2010</li> <li>• True Color Visor, Through Not Tinted Visor &gt; 95%</li> <li>• Useful Life Up To 10 Years</li> <li>• Tested According to DGUV GS-ET-29, Class 2</li> <li>• 318 kJ</li> <li>• Universal-Bracket Matching on Common Electrician Hard Hats</li> <li>• Slot-bracket Suitable for all Hard Hats with 30 mm Euro-Slots</li> <li>• Brackets for other Hard Hats on Request</li> <li>• Delivery with Anti-Fog Protective Spray</li> </ul>
Applications	• Substations • Utilities Power Generators • Industrial Electrical Maintenance & Installations
Origin	Germany



### ErgoS 3<sub>plus</sub>, 12 cal/cm<sup>2</sup>

#### Face Shield, Class 2, HRC 2, 12 cal/cm<sup>2</sup>

Standard	Arc Flash Protection GS-ET-29 (Box-Test): Class 2 / APC 2 ASTM F2178: ATPV 12.0 cal/cm <sup>2</sup> , HRC 2
Features	<ul style="list-style-type: none"> <li>• Arc Flash Faceshield of the Latest Generation, Light, Transparent Chin Protection, Perfect Weight Balance for the Helmet</li> <li>• Arc Flash Tested According to ASTM F2178, ATPV: 12.0 cal/cm<sup>2</sup></li> <li>• EN 166, "Personal Eye-protection Requirement"</li> <li>• ANSI / ISEA Z87.1 - 2010</li> <li>• True Color Visor, Through not Tinted Visor &gt; 95%</li> <li>• Useful Life up to 10 Years</li> <li>• Tested According to DGUV GS-ET-29, Class 2</li> <li>• 318 kJ</li> <li>• Weight: 420 g</li> <li>• Universal-Bracket Matching on Common Electrician Hard Hats</li> <li>• Slot-Bracket Suitable for all Hard Hats with 30 mm Euro-Slots</li> <li>• Slot-Bracket Suitable for Helmets Petzl Vertex Euro-Slot</li> <li>• Brackets for other Hard Hats on Request</li> <li>• Delivery with Anti-Fog Protective Spray</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany





### Arc 2 Light, 8.7 cal/cm²

#### Arc Flash Gloves, HRC 2, ARC2Light 8

Standard	EN388:2003 0X2X EN407:2004 4121XX IEC61482-1-1 APTV 8.7Cal/cm2 IEC61482-1-2 Class 1
Features	<ul style="list-style-type: none"> <li>• Light Gloves for Workplaces with Arc Flash Hazard Risks</li> <li>• Perfect Fitting Through Soft &amp; Pliant Knit Fabric</li> <li>• Also Excellent Undergloves for Insulating Gloves</li> <li>• Less Sweating, Therfor Longer Working with Insulating Gloves</li> <li>• Arc Flash Teste According to IEC 61482-1-2:2007 (APC 1)</li> <li>• Acr Flash Testet According to IEC 61482-1-1: ATPV 8,7 cal/cm²</li> <li>• Tested According to EN 407:2004 Heat Protection</li> <li>• Tested According to EN 388:2003 Mechanical Risks</li> <li>• Super Sensitivity</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### Arc 2 18.0 cal/cm²

#### Arc protection Gloves HRC 2, Class 2

Standard	Arc Protection Classification IEC 61482-1-2 APC 2 / Class 2 WLBP = 395 kJ ASTM F2675 / ATPV 18.0 cal/cm²
Features	<ul style="list-style-type: none"> <li>• Arc Flash Tested According to IEC 61482-1-1: ATPV 18 cal/cm²</li> <li>• Arc Flash Tested According to IEC 61482-1-2:2007 class 2 (APC 2)</li> <li>• Additional Tested with a Higher Tesl Leve W(LBP)= 395 kJ</li> <li>• Protection Against Mechanic Risks According to EN 388:2003</li> <li>• Protection Against Thermal Risks According to EN 407:2004</li> <li>• Back Side of Glove made of Double Textile</li> <li>• Inside Seams, with aramid Thread</li> <li>• Perfect Fit via Soft &amp; Flexible Leather</li> <li>• Excellent Delicacy of Feeling</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### Arc 3 31.0 cal/cm²

#### Arc Protection Gloves HRC 2, Class 2

Standard	IEC 61482-1-1: ATPV 31 cal/cm² IEC 61482-1-2:2007 class 2 (APC 2) W(LBP)= 395 kJ
Features	<ul style="list-style-type: none"> <li>• Arc Flash Tested According to IEC 61482-1-1: ATPV 31 cal/cm²</li> <li>• Arc Flash Tested According to IEC 61482-1-2:2007 class 2 (APC 2)</li> <li>• Additional Tested with a Higher Tesl Leve W(LBP)= 395 kJ</li> <li>• Protection Against Mechanic Risks According to EN 388:2003</li> <li>• Protection Against Thermal Risks According to EN 407:2004</li> <li>• Back Side of Glove Made of Double Textile</li> <li>• Perfect Fit Via Soft &amp; Flexible Leather</li> <li>• Excellent Delicacy of Feeling</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



### Arc 4 45.0 cal/cm²

#### Arc Protection Gloves HRC 4, Class 2

Standard	IEC 61482-1-1: ATPV 45 cal/cm² IEC 61482-1-2:2007 Class 2 (APC 2) W(LBP)= 630 kJ
Features	<ul style="list-style-type: none"> <li>• Arc Flash Tested According to IEC 61482-1-1: ATPV 45 cal/cm²</li> <li>• Arc Flash Testet According to IEC 61482-1-2:2007 class 2 (APC 2)</li> <li>• Additional Tested with a Higher Tesl Leve W(LBP)= 630 kJ</li> <li>• Protection Against Mechanic Risks According to EN 388:2003</li> <li>• Protection Against Thermal Risks According to EN 407:2004</li> <li>• Back Side of Glove Made of Double-textile</li> <li>• Perfect Fit Via Soft &amp; Flexible Leather</li> <li>• Excellent Delicacy of Feeling</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Substations</li> <li>• Utilities Power Generators</li> <li>• Industrial Electrical Maintenance &amp; Installations</li> </ul>
Origin	Germany



**Protecting People**



**GORILLA**

